


Montageanleitung | Instructions de montage Assembly Instructions| Instrucciones de montaje

SKU NUMBER: N616P425646/N616P425645/N616P425647

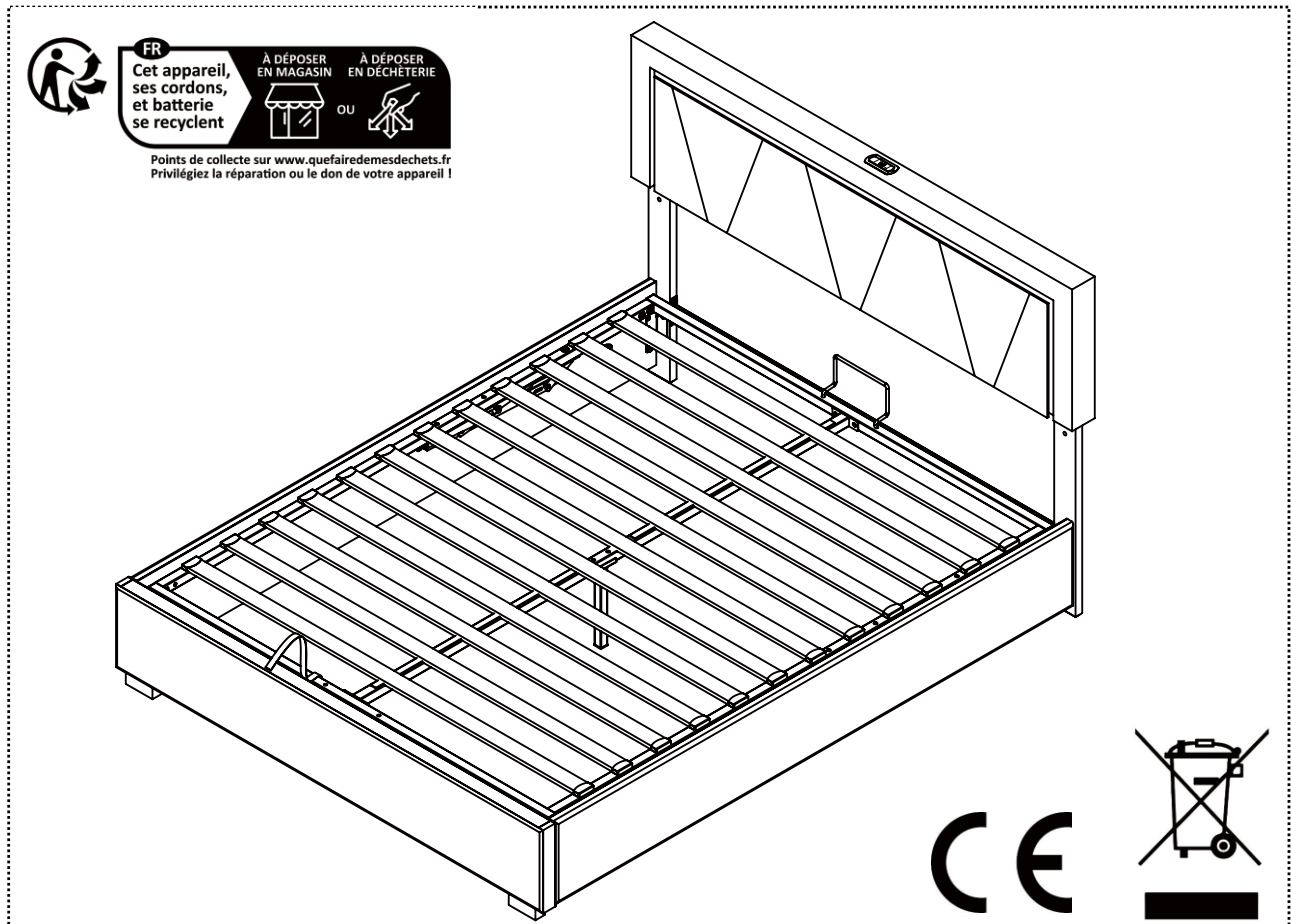

GB This set comes in 3 boxes. If you do not receive a full set of 3 boxes, please contact our customer service.

DE Dieses Set wird in 3 Schachteln geliefert. Wenn Sie nicht ein komplettes Set von 3 Boxen erhalten, kontaktieren Sie bitte unseren Kundenservice.

FR Ce set est livré en 3 boîtes. Si vous ne recevez pas un jeu complet de 3 boîtes, veuillez contacter notre service clientèle.

English

IMPORTANT FOR GAS LIFT BEDS&MAINTAINCE

- Please place the mattress on top of the bed frame.
- Please do not pull on the strap handles.
- Please press heavily to release the compressed gas.
- Periodically check all screw & fixings to ensure they are secure.
- When moving your product, carefully lift into place.
- Wipe clean with a slightly damp cloth – please do not use abrasive chemicals or bleach.
- Do NOT allow children to operate the lift mechanism.
- Do NOT allow children near the lift base when operating the mechanism.
- Do NOT stand inside the bed or the internal storage base.
- Do NOT overload the internal storage base.
- DO NOT jump on the product or any of its parts.

Deutsch

WICHTIG FÜR GASLIFT-BETTEN&WARTUNG

- Bitte legen Sie die Matratze oben auf den Bettrahmen.
- Bitte ziehen Sie nicht an den Gurtgriffen.
- Bitte drücken Sie kräftig, um das komprimierte Gas freizusetzen.
- Überprüfen Sie regelmäßig alle Schrauben und Befestigungen, um sicherzustellen, dass sie sicher sind.
- Wenn Sie Ihr Produkt bewegen, heben Sie es vorsichtig an seinen Platz.
- Mit einem leicht feuchten Tuch abwischen – bitte keine scheuernden Chemikalien oder Bleichmittel verwenden.
- Erlauben Sie Kindern NICHT, den Hebemechanismus zu bedienen.
- Lassen Sie Kinder NICHT in die Nähe des Liftsockels, wenn Sie den Mechanismus bedienen.
- Stellen Sie sich NICHT in das Bett oder in die Innenablage.
- Überlasten Sie den internen Liftsockel NICHT.
- Springen Sie NICHT auf das Produkt oder eines seiner Teile.


Français


IMPORTANT POUR LES LITS À RELEVAGE DE GAZ&MAINTENANCE

- Veuillez placer le matelas sur le dessus du cadre de lit.
- Ne tirez pas sur les poignées de la sangle.
- Appuyez fortement pour libérer le gaz comprimé.
- Vérifiez régulièrement que toutes les vis et fixations sont bien en place.
- Lorsque vous déplacez votre produit, soulevez-le avec précaution pour le mettre en place.
- Nettoyez avec un chiffon légèrement humide n'utilisez pas de produits chimiques abrasifs ou d'eau de Javel.
- Ne laissez pas les enfants utiliser le mécanisme de levage.
- Ne laissez pas les enfants s'approcher de la base de levage lorsqu'ils actionnent le mécanisme.
- Ne vous tenez PAS à l'intérieur du lit ou de la base de stockage interne.
- Ne surchargez pas la base de stockage interne.
- Ne pas sauter sur le produit ou l'une de ses parties.










- Posizionare il materasso sopra la struttura del letto.
- Non tirare le maniglie della cinghia.
- Premere con forza per rilasciare il gas compresso.
- Controllare periodicamente tutte le viti e i fissaggi per assicurarsi che siano saldi.
- Quando si sposta il prodotto, sollevarlo con cautela.
- Pulire con un panno leggermente umido, senza usare prodotti chimici abrasivi o candeggina.
- NON permettere ai bambini di azionare il meccanismo di sollevamento.
- NON permettere ai bambini di avvicinarsi alla base di sollevamento quando si aziona il meccanismo.
- NON sostare all'interno del letto o della base di contenimento interna.
- NON sovraccaricare la base di contenimento interna.
- NON saltare sul prodotto o sulle sue parti.

- Coloque el colchón sobre el somier.
- No tire de las asas de la correa.
- Presione con fuerza para liberar el gas comprimido.
- Compruebe periódicamente que todos los tornillos y fijaciones estén bien sujetos.
- Al mover el producto, levántelo con cuidado para colocarlo en su sitio.
- Limpie con un paño ligeramente humedecido; no utilice productos químicos abrasivos ni lejía.
- NO permita que los niños accionen el mecanismo de elevación.
- NO permita que los niños se acerquen a la base elevadora cuando accionen el mecanismo.
- NO se ponga de pie dentro de la cama o de la base de almacenamiento interna.
- NO sobrecargue el somier.
- NO salte sobre el producto ni sobre ninguna de sus piezas.





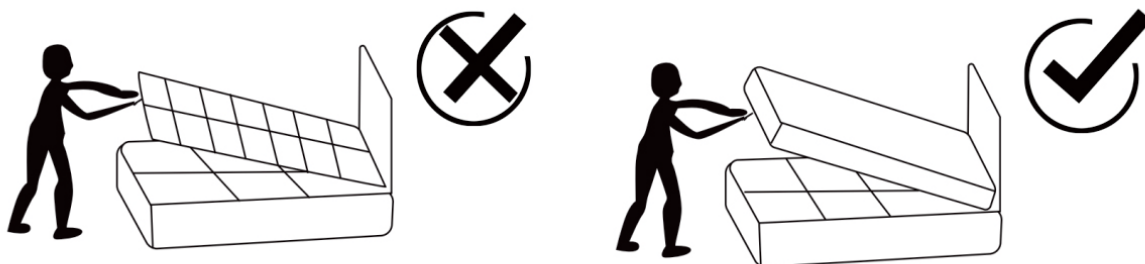


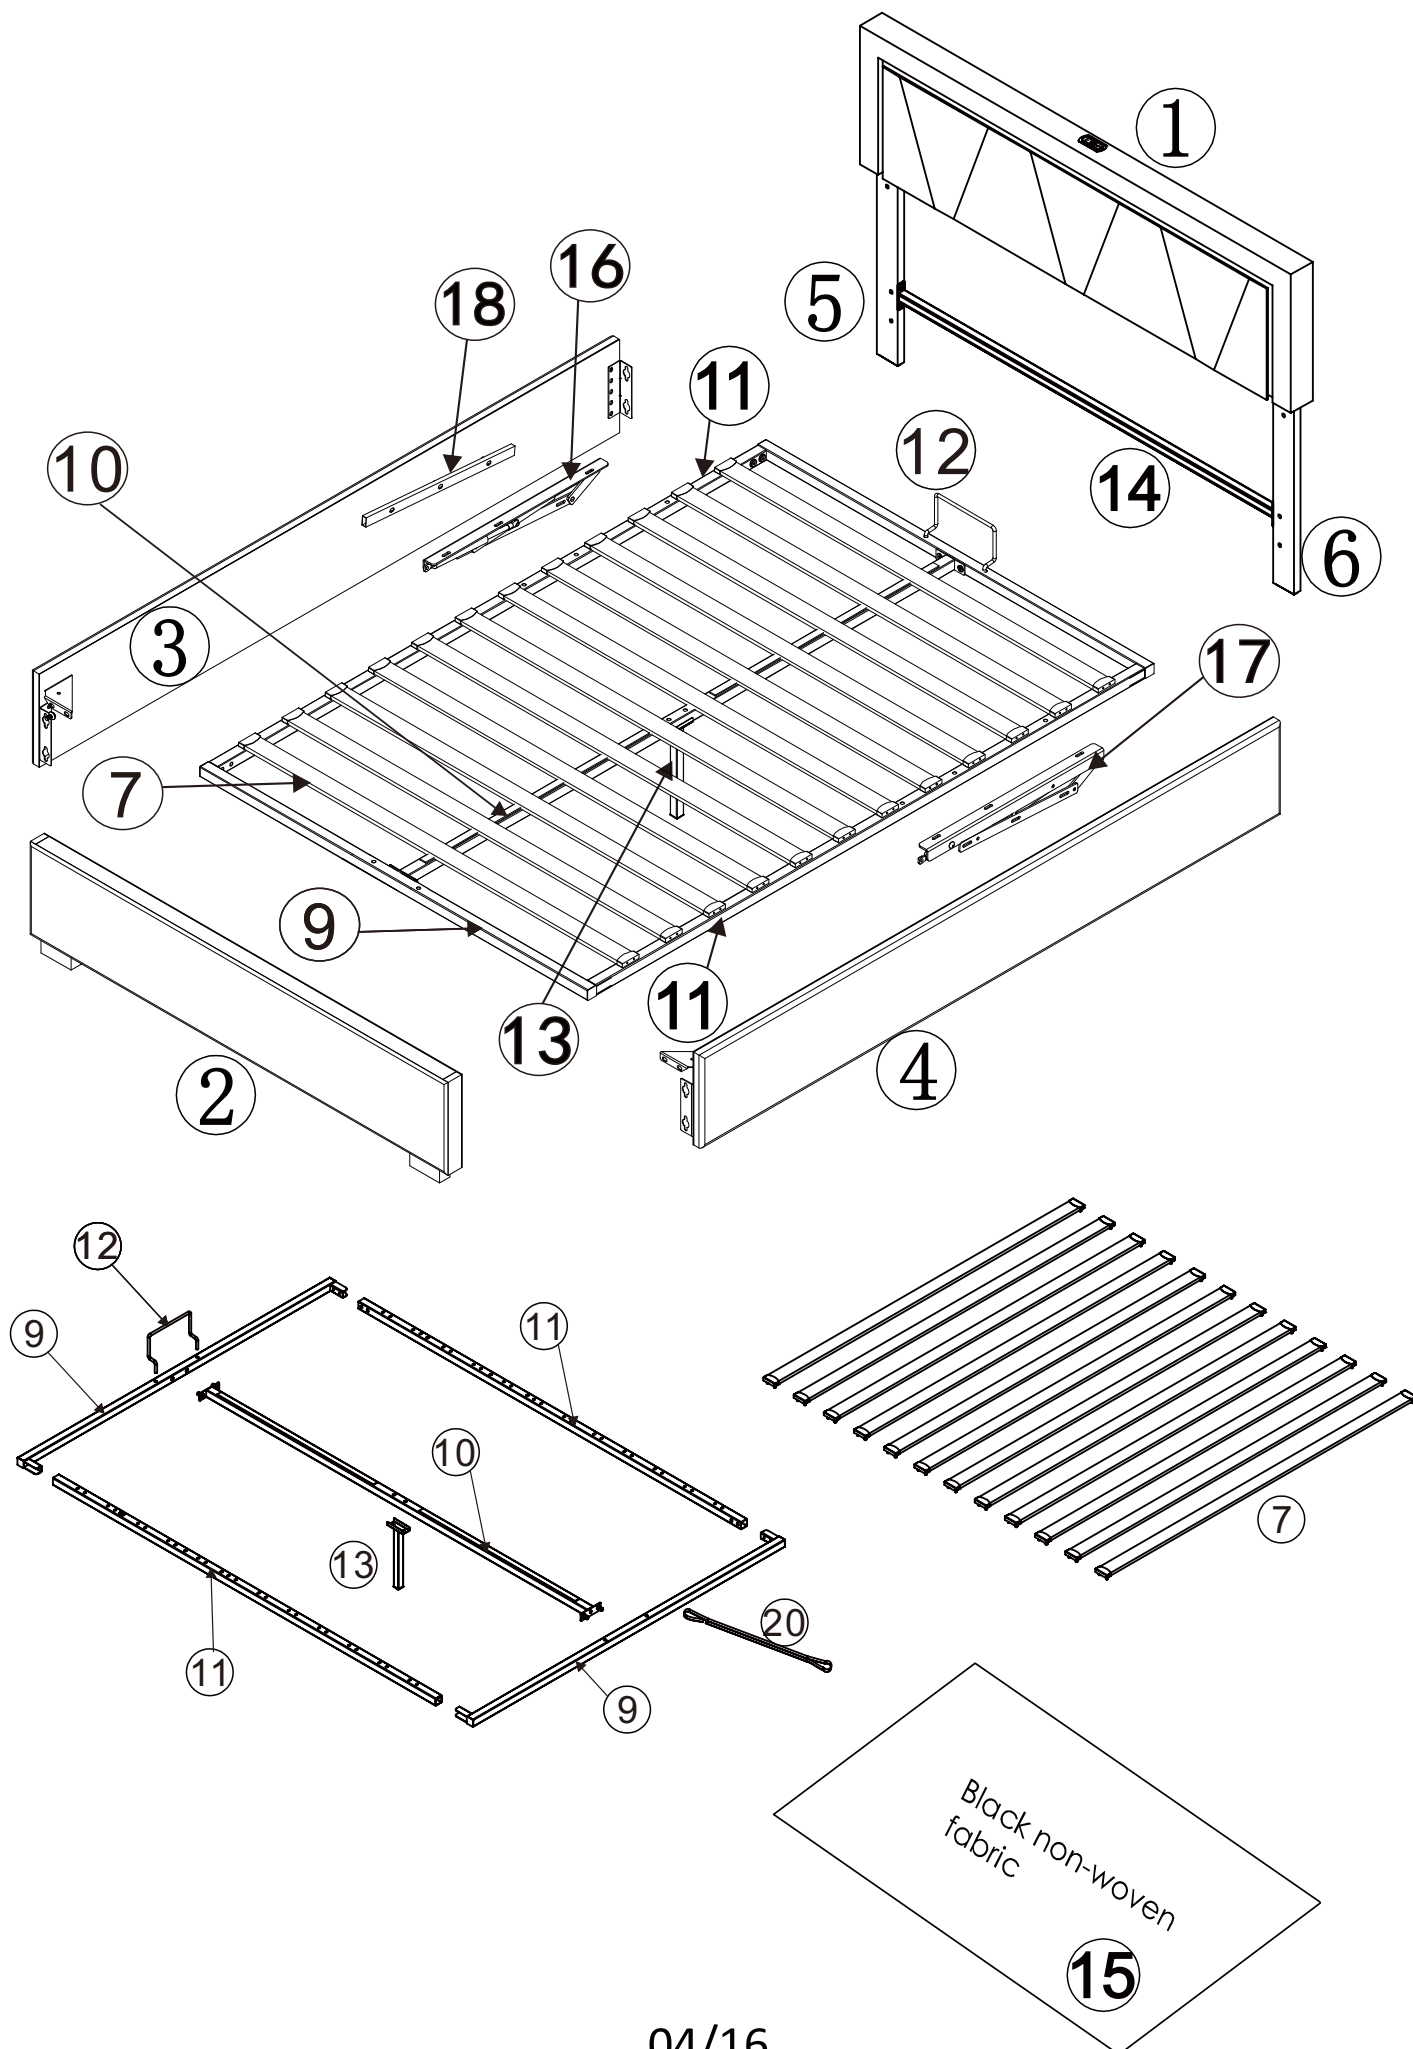


N616P425646

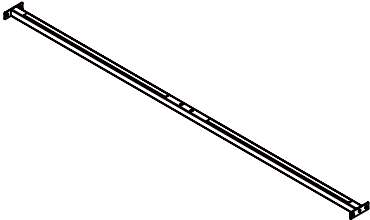3		X1	16		X1
4		X1	17		X1
9		X2	18		X2
10		X1	19		X2
11		X2	20		X1
14		X1			


N616P425645

1		X1	12		X1
2		X1	13		X1
5		X1	15		X1
6		X1			

N616P425647

7		X12
---	---	-----


Hardware List –Hardware-Liste-Liste dumatériel N616P425645

A	 M8*25	X32	B	 M8*30	X6	C	 M8*45	X16+2
D	 M8*55	X2	E	 M8	X10			X1
F		X2	G		X4	H		X2
J		X24		 S5	X1	8		X1
	 RF RGB CONTROLLER	X1		 POWER ADAPTER CABLE	X1		 Adaptor	X1


1



M8*25
A x 12pcs



x 1pc

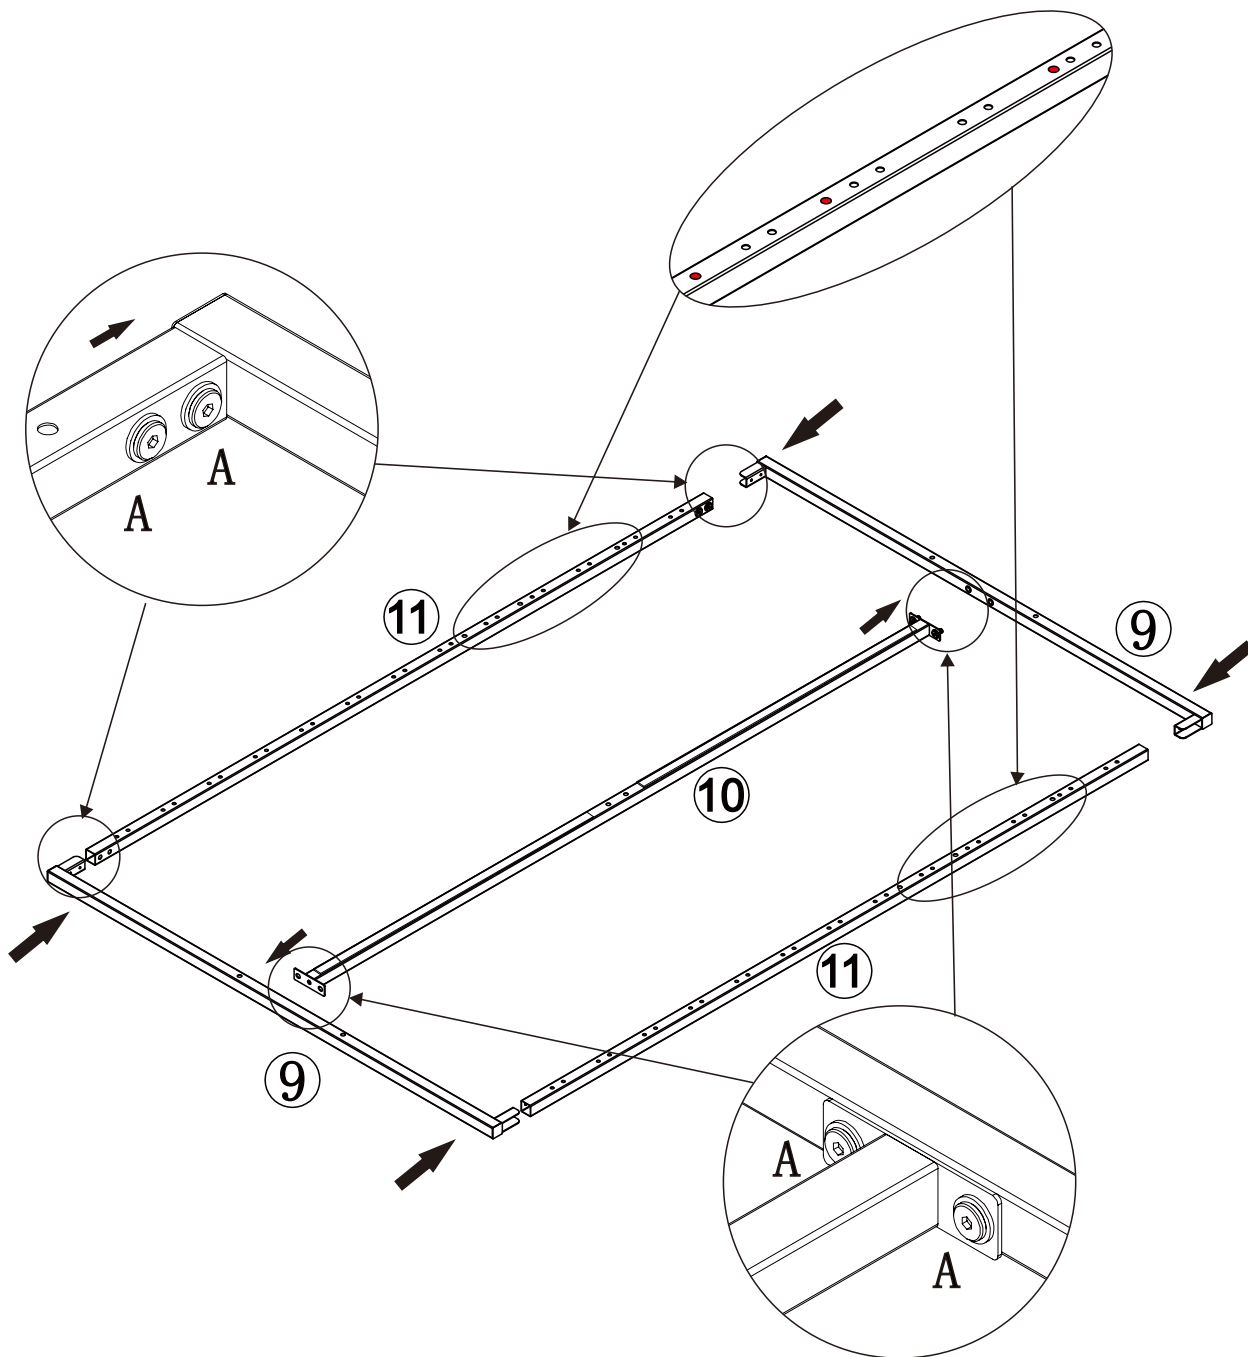


2



M8*45
C x 4pcs



S5
x 1pc

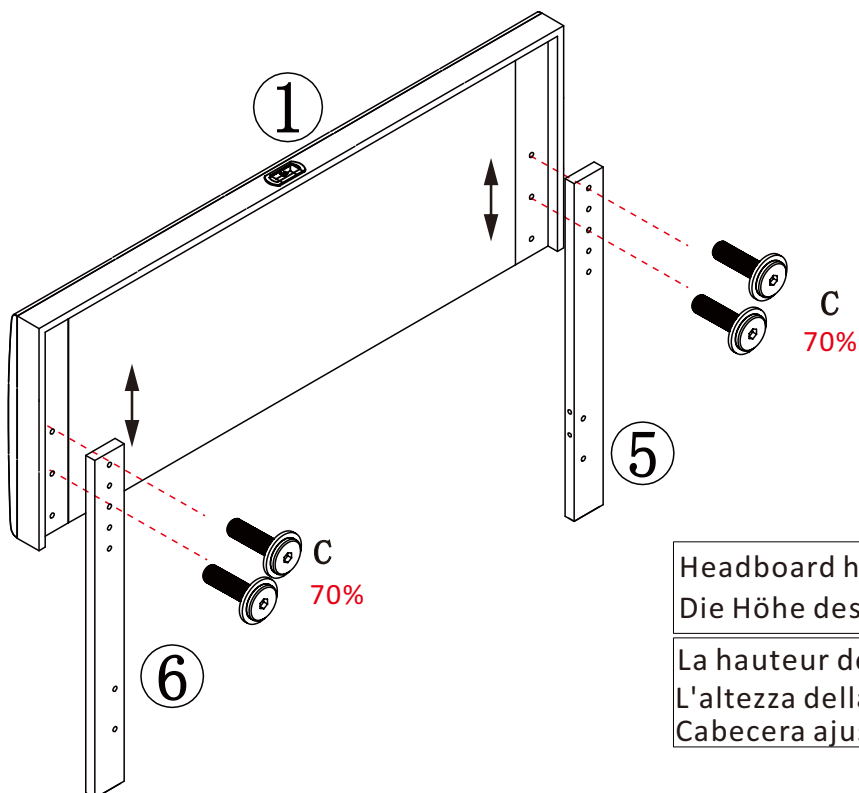


Headboard height is adjustable
Die Höhe des Kopfteils ist verstellbar

La hauteur de la tête de lit est réglable
L'altezza della testiera è regolabile
Cabecera ajustable en altura


3




M8*25
A x 4pcs



S5
x 1pc

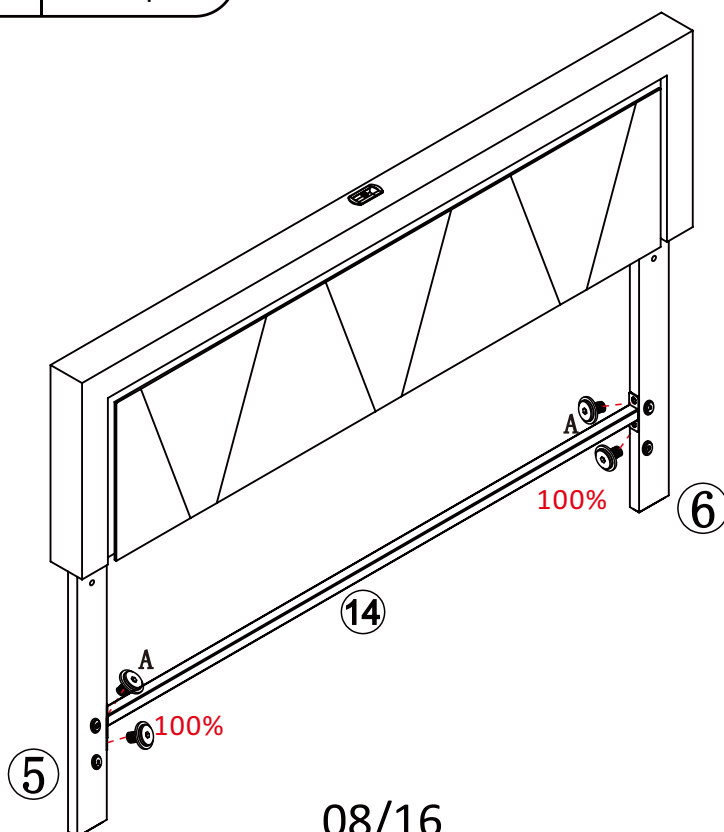


4



8 x 1pc



H x 2pcs




x 1pc



M8*55
D x 2pcs



M8*45
C x 4pcs

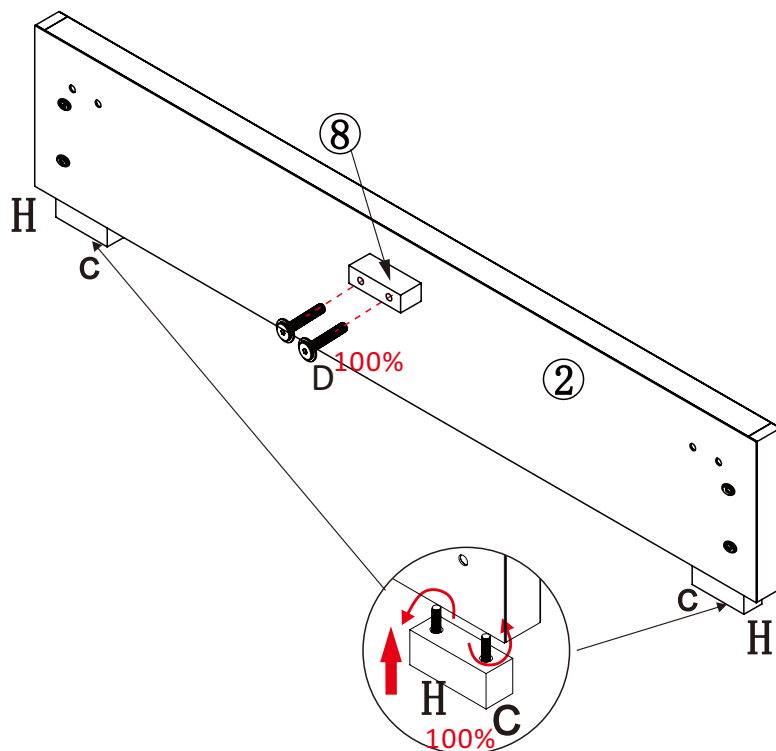



5



x 1pc



E x 4pcs

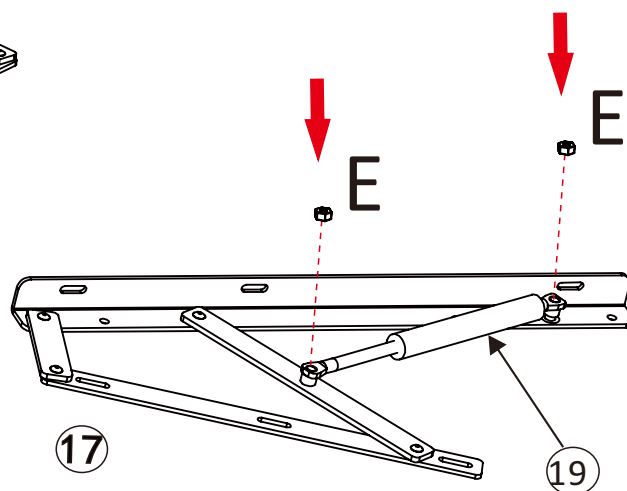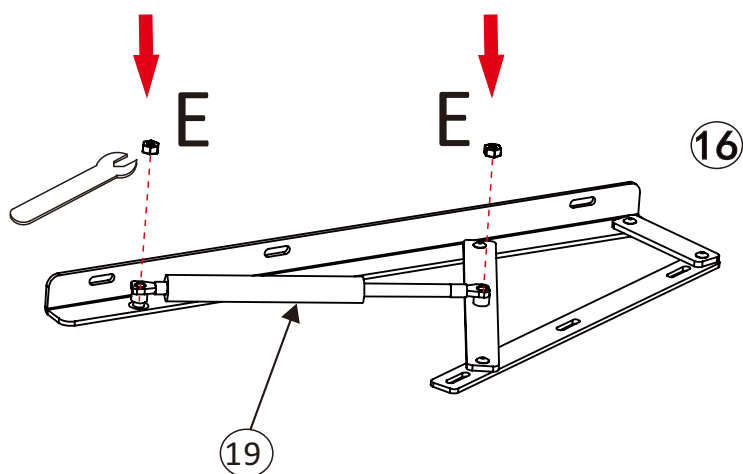


6



M8*25
A x 12pcs




M8*30
B x 6pcs








G x 4pcs



F x 2pcs




x 1pc

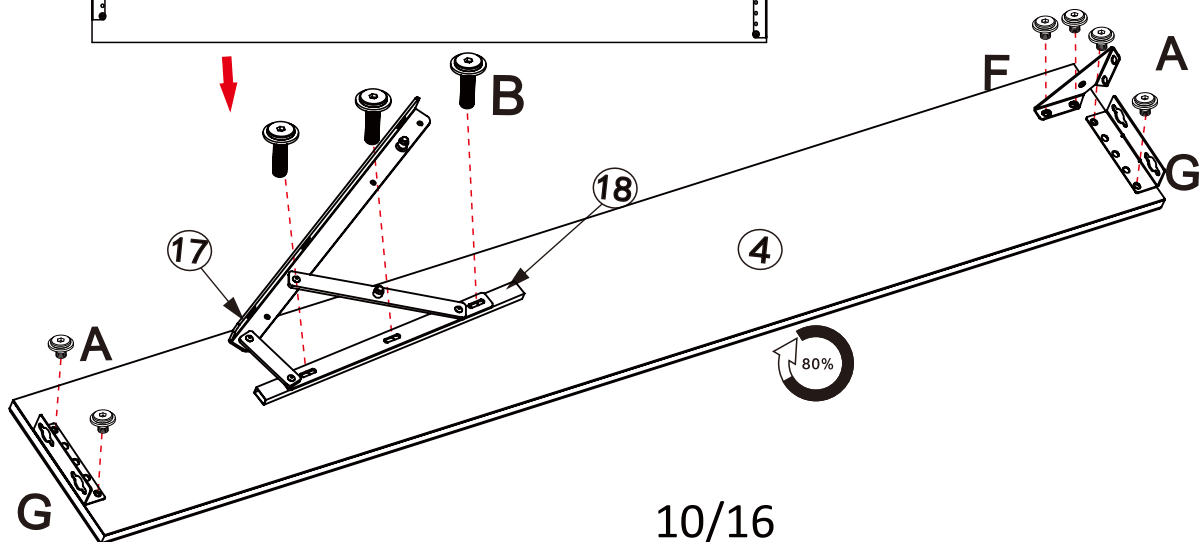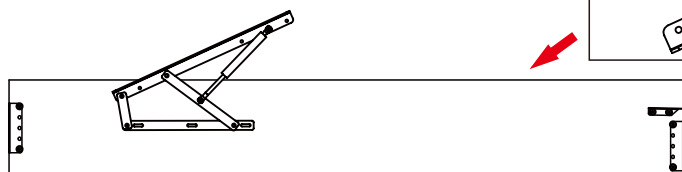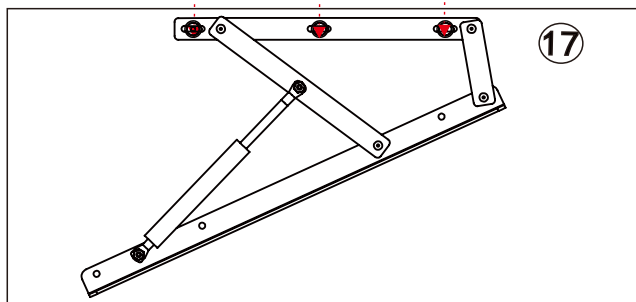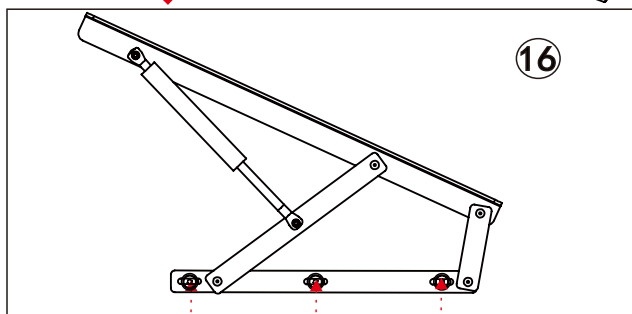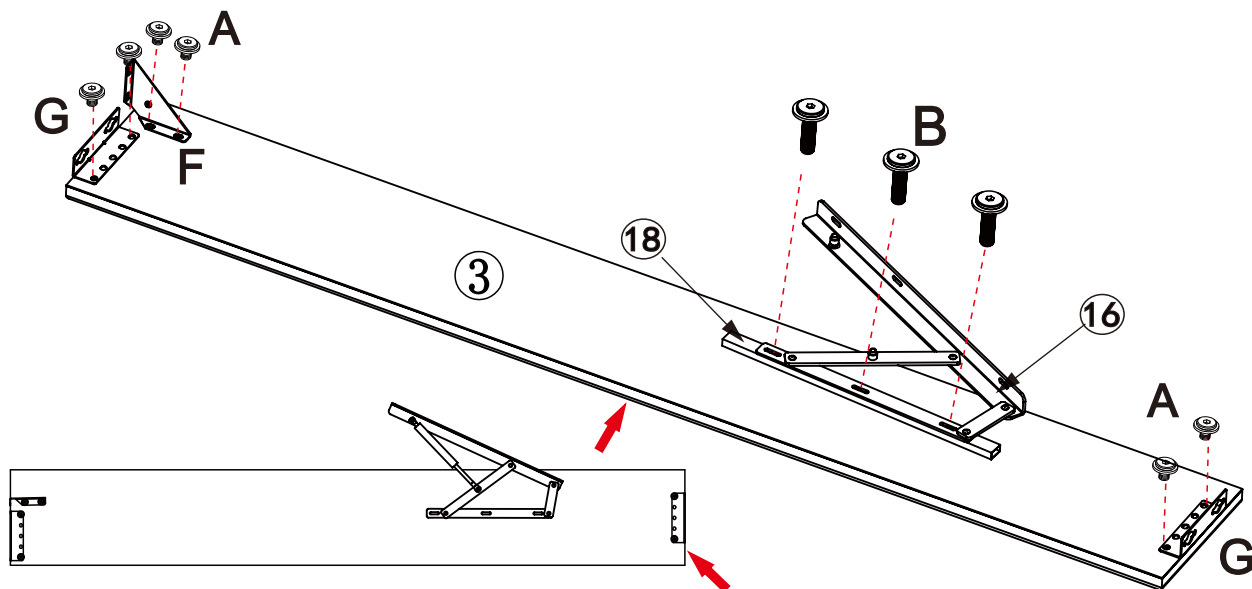


7




M8*25
A x 4pcs



x 1pc

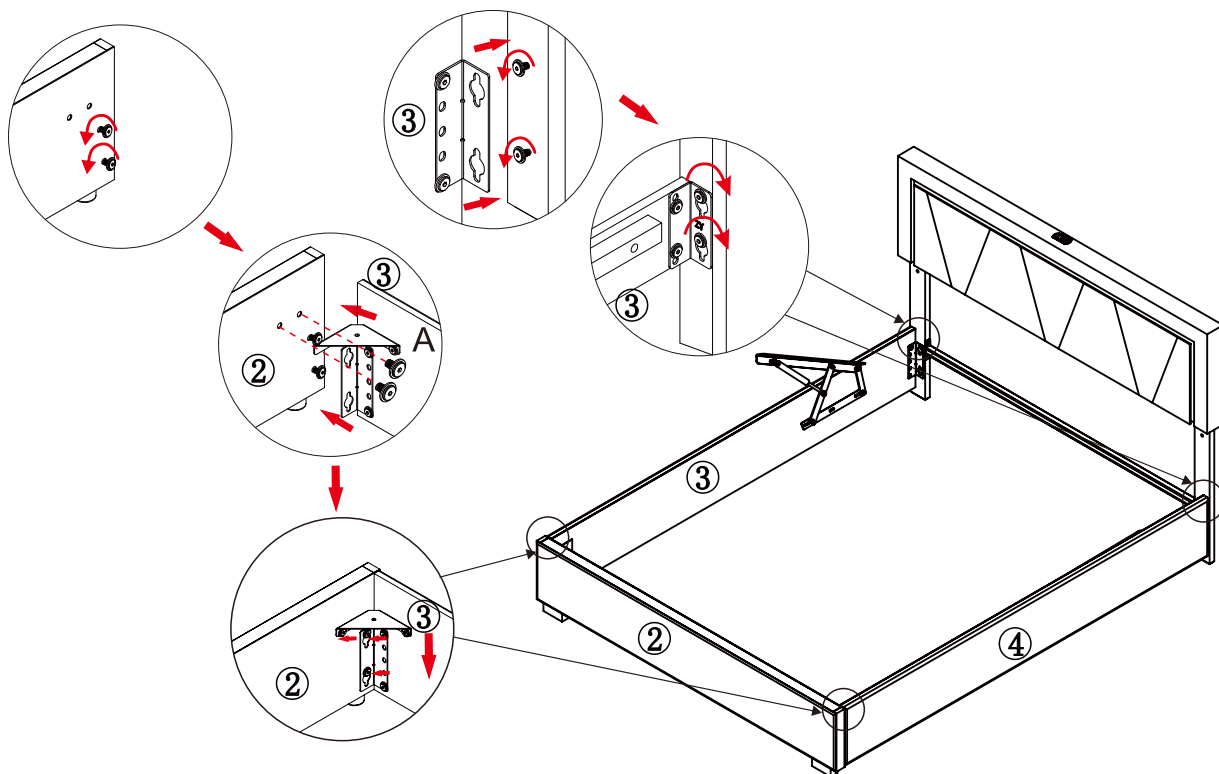

8

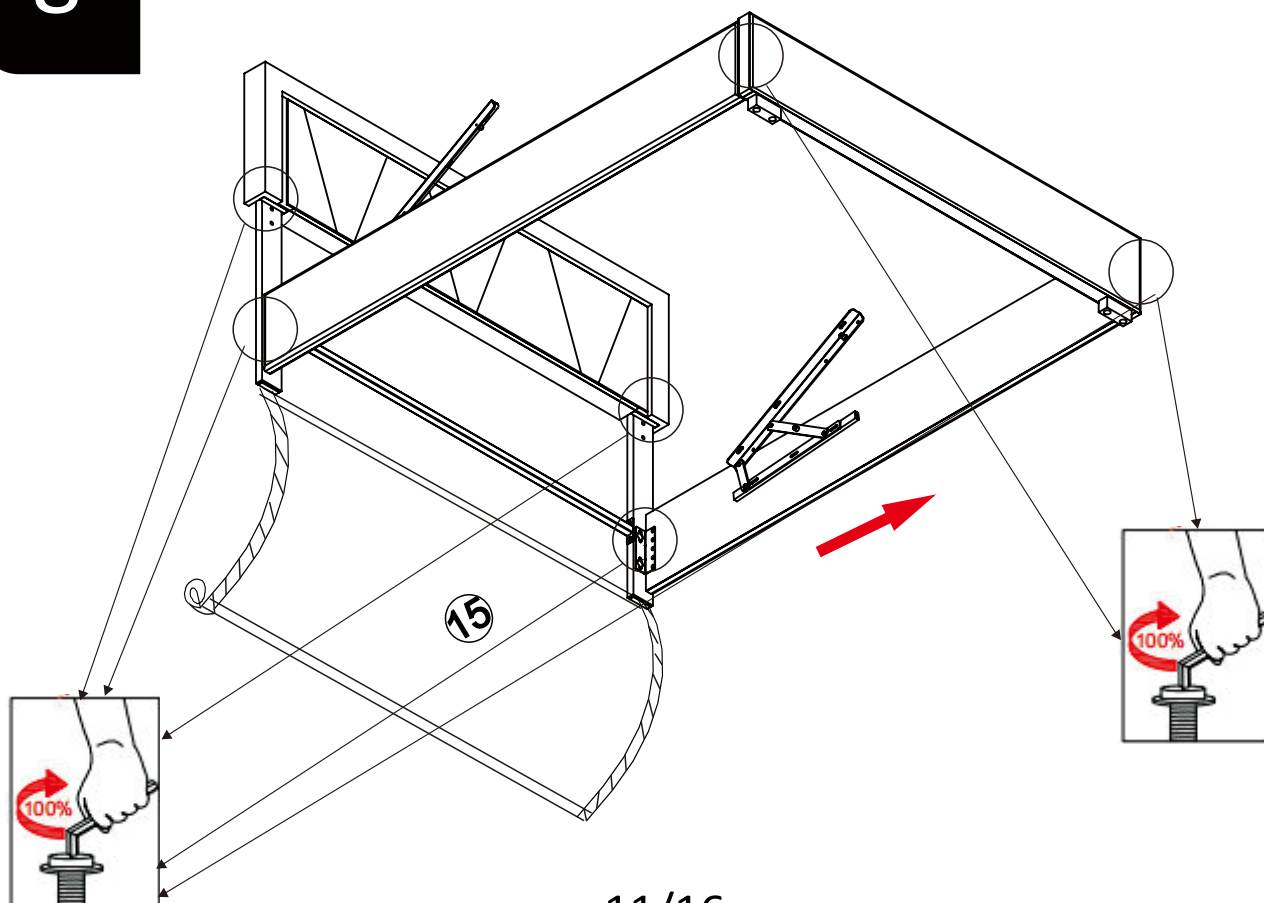


9

M8*45
C x 6pcs

S5
x 1pc

E x 6pcs

x 1pc

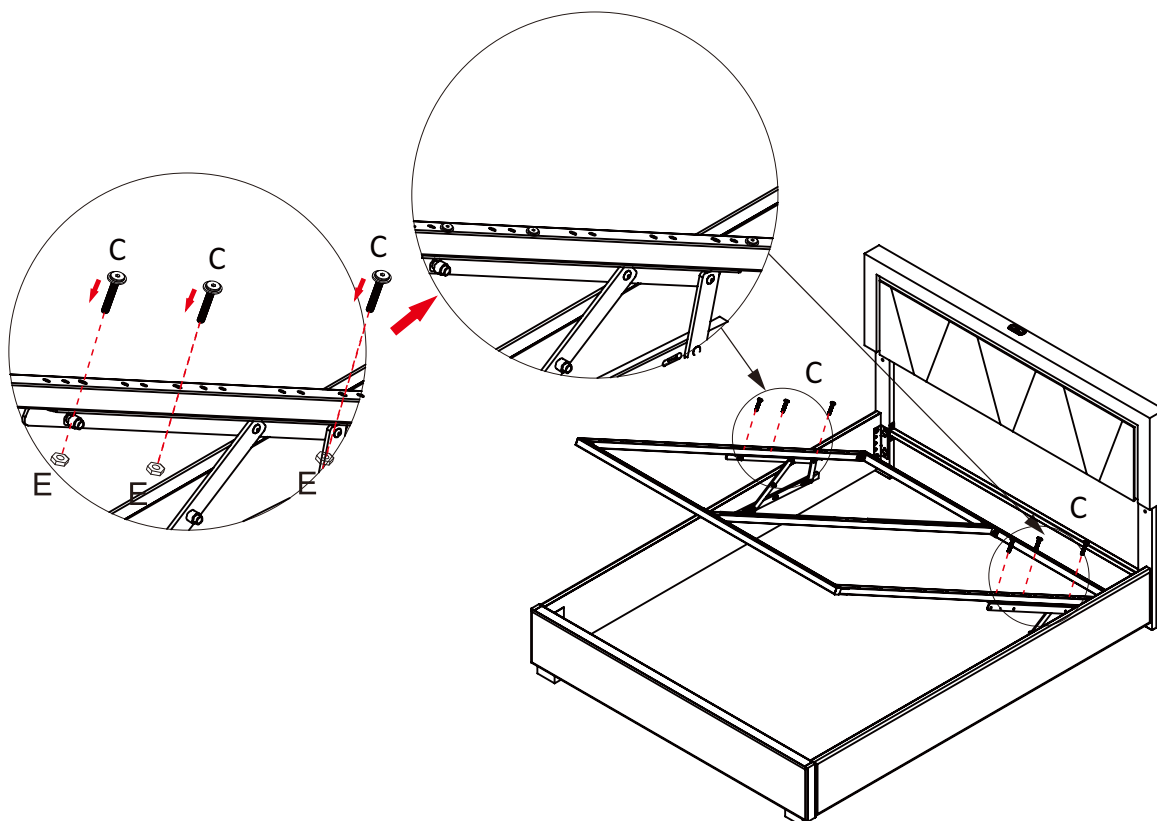


10

M8*45
C x 2pcs

S5
x 1pc

x 1pc

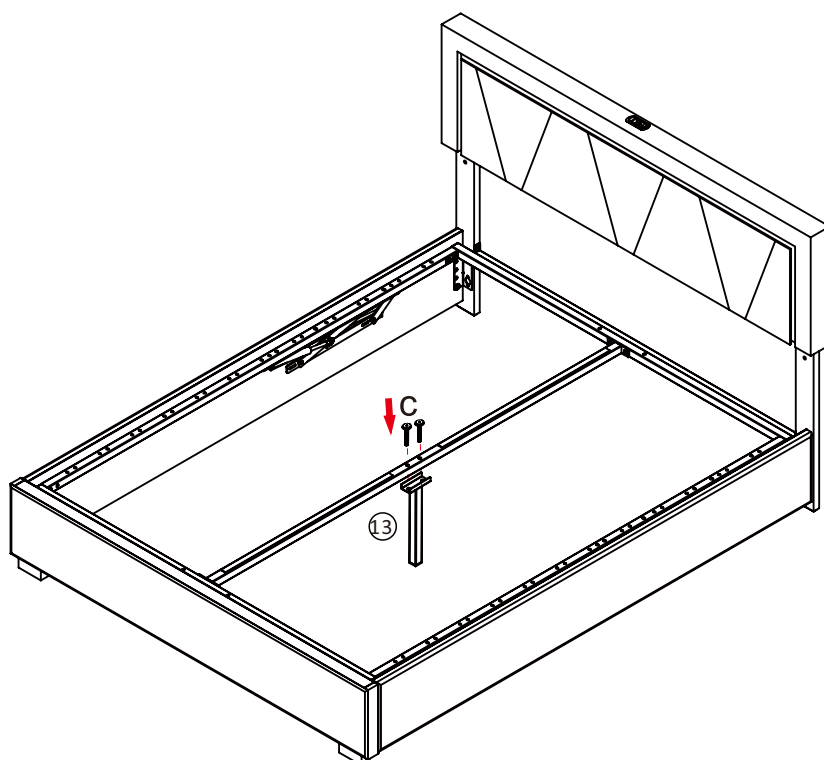

11



J x 24pcs

J

7

J

12

20

20

12

POWER ADAPTER CABLE


LED

USB

POWER ADAPTER CABLE

Adaptor

RF RGB CONTROLLER

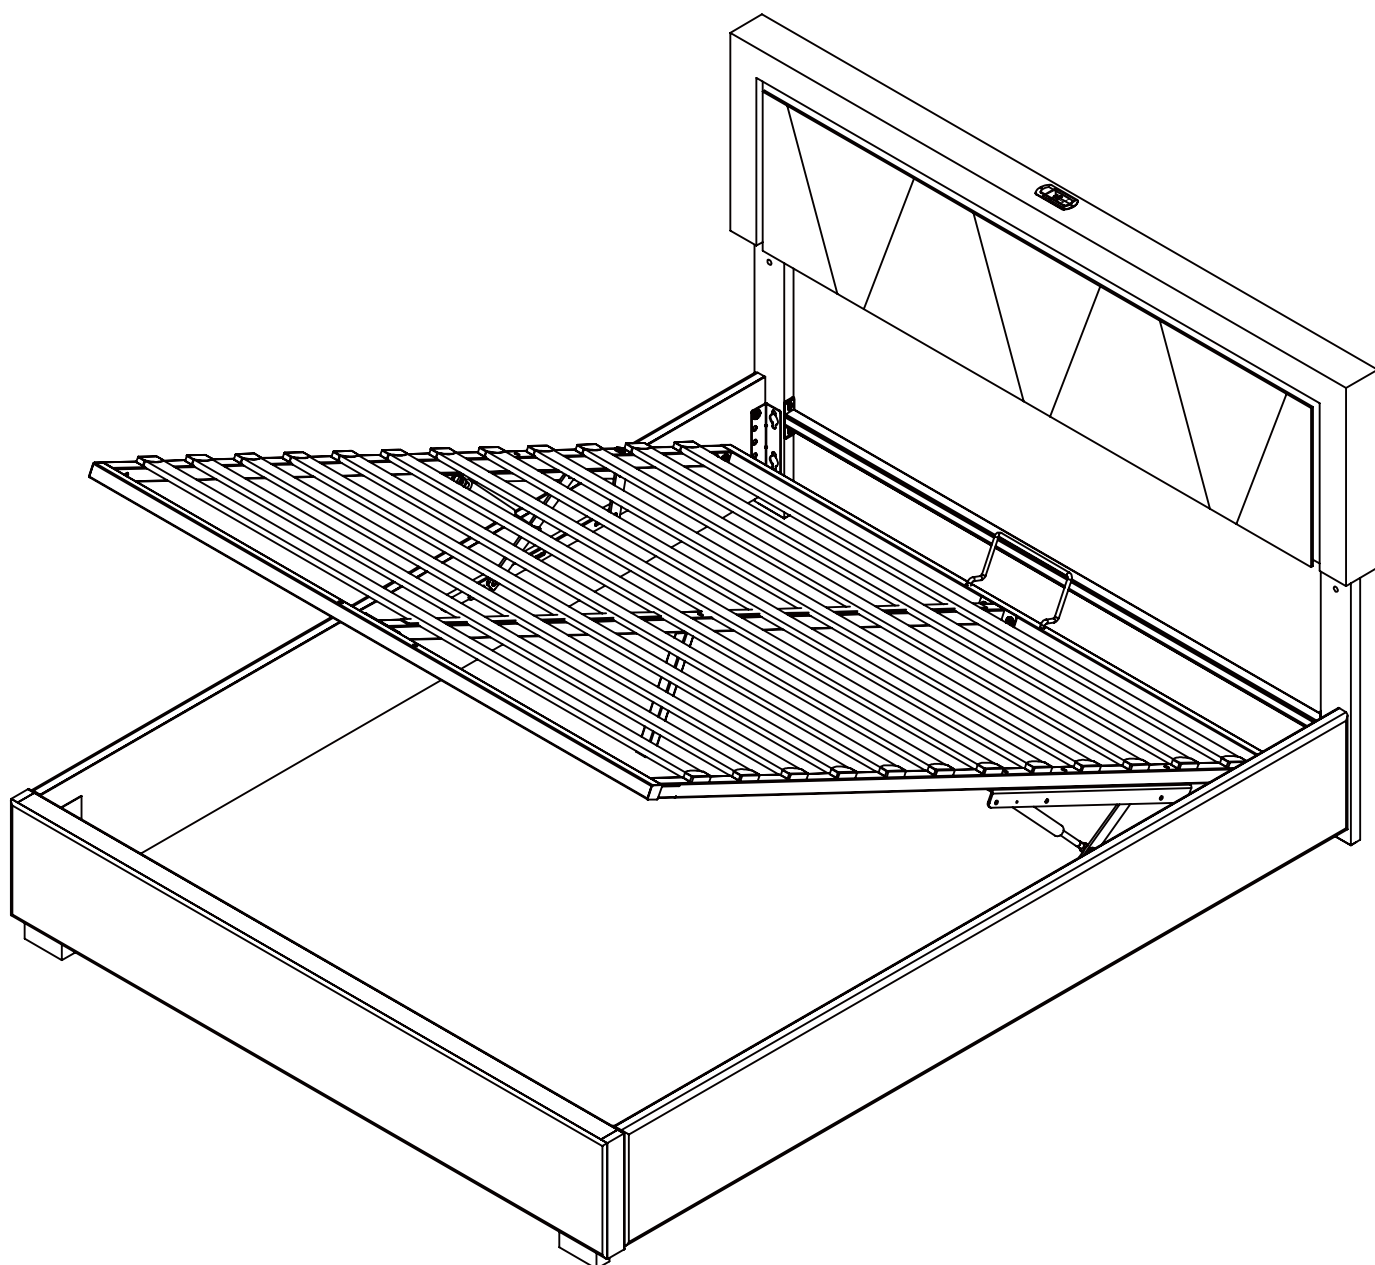

★ IMPORTANT NOTICE ★

HYDRAULIC BED OPERATING INSTRUCTIONS

Once your bed frame is completely assembled, the slat unit will not operate correctly unless a mattress is placed on the slat frame. Position the mattress on the slat frame whilst it is in the closed position.

PLEASE NOTE –It takes a lot of force to make the initial movement of the ottoman. This is a design feature of the product so that it does not fall shut the nearer to being closed the ottoman is, the easier it is to move. When the ottoman is almost shut, it will close completely under its own weight.

When lowering the slat unit for the first time, take care to make sure it does not rub unevenly on the inside face of the side rails. If it does, the bed has been assembled slightly out of square. This can be rectified by moving the foot end of the bed slightly to the left or right whilst leaving the head end stationary.



PISTONS

The pistons used in the construction of this product are extremely strong and cannot be operated by hand when taken off the ottoman. All pistons are tested for correct pressure and operation before being attached to the slat unit.

Initially it might appear that the pistons are very stiff when opening and closing the ottoman.

THIS IS PERFECTLY NORMAL

When fully assembled and the mattress is in position, please raise and lower the ottoman 4/5 times to ensure the gas piston are fully lubricated.

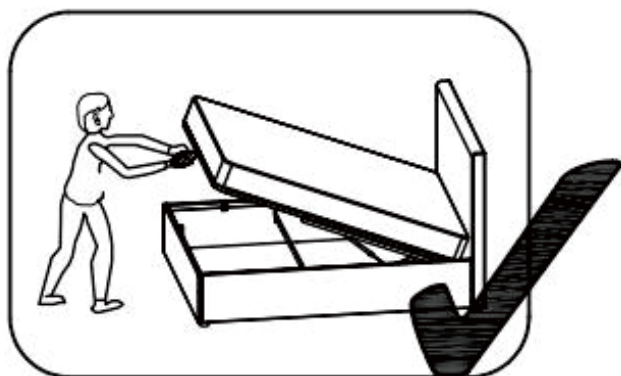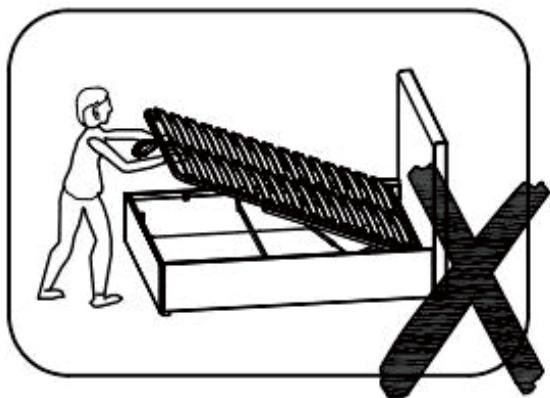

You can choose mobile control or RF Remote Control

First, pull out the plastic card on the RF Remote Controller and power on the RF Remote Controller.

Mobile phone control steps:

1. Connect LED Lamp and RF RGB Controller.
2. Plug in the Adaptor Power supply.
3. Scan the RF RGB Controller QR code on the controller and download the software .
4. Turn on the Bluetooth function of the mobile phone and search for Bluetooth pairing .
5. Open the LED APP and switch colors change.
Click the music switch to realize the skip mode of different LED lights.
Press the timing switch to realize the automatic light o ffunction,etc.

Sie haben die Wahl zwischen mobiler Steuerung oder RF Remote Control

Ziehen Sie zunächst die Plastikkarte auf der RF-Fernbedienung heraus und schalten Sie die RF-Fernbedienung ein.

Schritte zur Steuerung des Mobiltelefons:

1. LED-Lampe und RF-RGB-Controller anschließen.
2. Schließen Sie das Netzteil des Adapters an.
3. Scannen Sie den QR-Code des RF RGB Controllers auf dem Controller und laden Sie die Software herunter.
4. Schalten Sie die Bluetooth-Funktion des Mobiltelefons ein und suchen Sie nach Bluetooth-Kopplung .
5. Öffnen Sie die LED-APP und wechseln Sie die Schalterfarben.

Klicken Sie auf den Musikschalter, um den Skip-Modus verschiedener LED-Leuchten zu aktivieren.

Drücken Sie den Zeitschalter, um die automatische Lichtfunktion usw. zu realisieren.

Vous pouvez choisir le contrôle mobile ou le contrôle à distance RF

Tout d'abord, retirez la carte plastique de la télécommande RF et allumez la télécommande RF.

Étapes de contrôle du téléphone portable :

1. Connectez la lampe LED et le contrôleur RF RGB.
2. Branchez l'adaptateur d'alimentation.
3. Scannez le code QR du contrôleur RF RGB sur le contrôleur et téléchargez le logiciel.
4. Activez la fonction Bluetooth du téléphone portable et recherchez l'appairage Bluetooth .
5. Ouvrez l'application LED et changez de couleur.

Cliquez sur le commutateur de musique pour réaliser le mode de saut de différentes lumières LED.

Appuyez sur le commutateur de temporisation pour réaliser la lumière automatique o ffunction, etc.



DE: Wenn Sie die Lichter nicht erfolgreich arbeiten lassen können, überprüfen Sie bitte die Folgendes:

1. Bitte überprüfen Sie die Fernbedienung. Sie müssen die Fernbedienung abreißen Plastikseptum vor Gebrauch.
2. Lassen Sie die Fernbedienung nicht zu weit vom Empfänger entfernt sein Es gibt kein Hindernis zwischen ihnen.
3. Bitte beachten Sie, dass die Fernbedienung für den Transport keine Batterien enthält. Das Batteriemodell lautet: CR2025

FR: Si vous ne parvenez pas à faire fonctionner les lumières correctement, veuillez vérifier les points suivants

1. Veuillez vérifier la télécommande. Vous devez retirer le septum en plastique de la télécommande avant utilisation.
2. Ne laissez pas la télécommande être trop éloignée du récepteur. Il n'y a aucun obstacle entre eux.
3. Veuillez noter que la télécommande ne contient pas de piles pour le transport. Le modèle de batterie est : CR2025

UK: If you can't make the lights work successfully, please check the following:

1. Please check the remote control. You need to tear off the remote plastic septum before use.
2. Don't let the remote control be too far from the receiver There is no obstacle between them.
3. Please note that the remote control does not contain batteries for transportation. The battery model is: CR2025

GB- NOTE: The battery in the remote control requires you to purchase and install it yourself.
Model: CR2025 3.V

DE-HINWEIS: Die Batterie in der Fernbedienung müssen Sie selbst kaufen und installieren.
Modell: CR2025 3.V

FR-REMARQUE : la pile de la télécommande doit être achetée et installée par vos soins.
Modèle: CR2025 3.V

IT-NOTA: la batteria del telecomando deve essere acquistata e installata autonomamente.
Modell: CR2025 3.V

ES-NOTA: La pila del mando a distancia debe comprarla e instalarla usted mismo.
Modelo CR2025 3.V

①



②



③



④



⑤



⑥



⑦



⑧



EN:Battery Safety Instructions


1. Do not dispose of used button batteries or remote controls in household trash. To protect the environment and prevent hazardous leakage, please follow these guidelines:
2. Remove button batteries after use and take them to a local battery recycling point or hazardous waste collection site.
3. Do not burn or dismantle the batteries to avoid explosion or toxic release.
4. If the remote control is no longer in use, please deliver it to a certified electronics recycling facility to promote resource reuse.
5. Keep out of reach of children to prevent accidental ingestion or injury.
6. This product does not include batteries; please purchase them separately. The compatible button cell model for the remote control is CR2025 3V.
7. If the light strip is not working, please try replacing the battery first. If the issue persists, contact the seller for assistance.
8. Keep the remote control away from children — keep it away from children! If the battery is accidentally swallowed, seek medical attention immediately.

DE:Batteriesicherheitshinweise

1. Entsorgen Sie gebrauchte Knopfzellen oder Fernbedienungen nicht im Hausmüll. Um die Umwelt zu schützen und gefährliche Leckagen zu vermeiden, beachten Sie bitte die folgenden Hinweise:
2. Entfernen Sie die Knopfzelle nach dem Gebrauch und bringen Sie sie zu einer örtlichen Batteriesammelstelle oder einem Sondermüllentsorgungszentrum.
3. Batterien nicht verbrennen oder zerlegen, um Explosionen oder die Freisetzung giftiger Stoffe zu vermeiden.
4. Wenn die Fernbedienung nicht mehr verwendet wird, bringen Sie sie zu einer zertifizierten Elektronik-Recyclingstelle, um eine Wiederverwertung zu ermöglichen.
5. Außerhalb der Reichweite von Kindern aufbewahren, um versehentliches Verschlucken oder Verletzungen zu verhindern.
6. Dieses Produkt enthält keine Batterien. Bitte kaufen Sie diese separat. Das kompatible Knopfzellenmodell für die Fernbedienung ist CR2025, 3V.
7. Wenn der Lichtstreifen nicht funktioniert, versuchen Sie zunächst, die Batterie zu wechseln. Besteht das Problem weiterhin, kontaktieren Sie bitte den Verkäufer.
8. Halten Sie die Fernbedienung unbedingt von Kindern fern — unbedingt fernhalten! Wird die Batterie versehentlich verschluckt, suchen Sie sofort medizinische Hilfe auf.

FR:Instructions de sécurité pour les piles

1. Ne jetez pas les piles bouton usagées ou les télécommandes à la poubelle ménagère. Pour protéger l' environnement et éviter tout risque de fuite dangereuse, veuillez suivre les consignes suivantes :
 2. Retirez les piles bouton après usage et déposez-les dans un point de collecte local ou un centre de déchets dangereux.
 3. Ne brûlez pas et ne démontez pas les piles, cela pourrait entraîner une explosion ou libérer des substances toxiques.
 4. Si la télécommande n'est plus utilisée, déposez-la dans un centre de recyclage agréé pour appareils électroniques, afin de favoriser la réutilisation des ressources.
 5. Gardez hors de portée des enfants pour éviter tout risque d'ingestion accidentelle ou de blessure.
- 6.Ce produit ne contient pas de pile. Veuillez l'acheter séparément. Le modèle de pile bouton compatible pour la télécommande est CR2025, 3V.
- 7.Si le ruban LED ne fonctionne pas, essayez d'abord de remplacer la pile. Si le problème persiste, contactez le vendeur.
- 8.Tenez la télécommande éloignée des enfants — éloignez-la vraiment ! En cas d'ingestion accidentelle de la pile, consultez immédiatement un médecin.

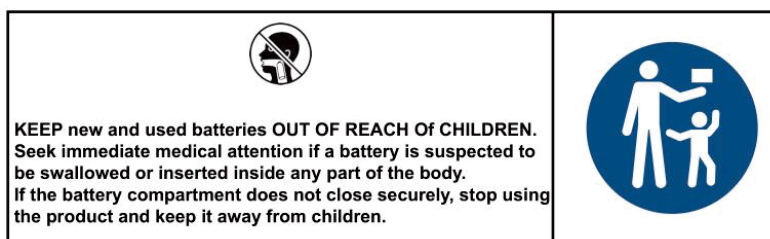

If a battery has been ingested, or there is a possibility one might have been ingested, please seek medical attention and inform the medical authorities that you suspect battery ingestion.

It's not always clear when a child has swallowed a button battery, as there are no specific symptoms. However, they might:

- cough, gag, or drool;
- seem to have a stomach bug or virus;
- vomit;
- complain of pain in their stomach, chest, or throat;
- appear tired or sluggish; and
- lose their appetite.

Since the signs aren't obvious, it's important to keep a close eye on loose, used, or spare button batteries in your home, as well as the products that contain them.

CERTIFICATE

of Conformity

Low Voltage Directive (EU) 2014/35

Registration No.: AN 50619202 0001
Report No.: CN23HD4Y 001
Holder: Xiamen Eahunt Electronics Co.,Ltd.
Room 755, Venture Building,
Venture Park, Torch High-tech Zone,
Xiamen,
Fujian
P.R. China
Product: Power Supply
(SWITCHING POWER SUPPLY)

Type designation listed on the next page

This certificate of conformity is based on an evaluation of a sample of the above-mentioned product. Technical Report and documentation are at the License Holder's disposal. This is to certify that the tested sample is in conformity with Annex I of Council Directive (EU) 2014/35, referred to as the Low Voltage Directive. This certificate does not imply assessment of the series-production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorized to use this certificate in connection with the EC declaration of conformity according to Annex IV of the Directive.

Certification Body

Date: 2024-02-02


Dipl.-Ing. Th. Illing



TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg

CE The CE marking may be used if all relevant and effective EC Directives/Regulations are complied with. CE

www.tuv.com

 **TÜVRheinland®**
Precisely Right.



Certificate of Conformity

Certification Number: :ZTL21ER-052406EZ

Zhiyuan Testing(Shenzhen) Co. Ltd. hereby declares that testing has been completed and reports have been generated for:

Applicant: Shenzhen Kingunion Lighting Co., LTD
Address: Second Floor, No.1 Kaixinda Technology Park, No 49th Zhoushi Road, Langxin Community, Shiyan Town, Baoan District, Shenzhen City, Guangdong, China
Manufacturer: Shenzhen Kingunion Lighting Co., LTD
Address: Second Floor, No.1 Kaixinda Technology Park, No 49th Zhoushi Road, Langxin Community, Shiyan Town, Baoan District, Shenzhen City, Guangdong, China
Product: LED Strip
Trademark: 
Model: KU-5050-60D-RGB
Rating: DC12V
EN 55015:2019+A11:2020
Test standard: EN 61547:2009
EN 61000-3-2:2019
EN 61000-3-3:2013AMD.1:2019

The EUT described above has been consolidate by us and found in compliance with the council EMC (as amended) -- 2014/30/EU. It is only valid in connection with the report number:ZTL21ER-052406EZ.



This certificate of conformity is based on a single evaluation of the submitted sample(s) of the above mentioned product. It does not imply an assessment of the whole product and relevant Directives have to be observed.

Address: Room 505A, 5th Floor, R&D Center Building, Hongfa Jatei High-tech Park, Langxin Community, Shiyan Street, Baoan District, Shenzhen, China

Tel: +86-755-21002030

Fax: +86-755-21002030

<http://www.sz-ztl.cn/>



Certification Number: :ZTL21ER-052406EZ

Model accessories:

KU-**-XXX-YY-ZZ-Series-12V**

Remarks:KU represents abbreviation of company name; **** represents led model of product; XXX represents led quantity of product; YY represents length of product; ZZ represents waterproof type of product: A=IP20, B=IP44, C=IP65, D=IP66, E=IP67, F=IP68; Series is product series, represents different color, RGB represents three colors.

KU-5050-16D-RGB	KU-5050-18D-RGB	KU-5050-24D-RGB	KU-5050-30D-RGB
KU-3528-16D-RGB	KU-3528-18D-RGB	KU-3528-24D-RGB	KU-3528-30D-RGB
KU-2835-16D-RGB	KU-2835-18D-RGB	KU-2835-24D-RGB	KU-2835-30D-RGB
KU-3535-12D-RGB	KU-3535-18D-RGB	KU-3535-24D-RGB	KU-3535-30D-RGB
KU-3838-12D-RGB	KU-3838-18D-RGB	KU-3838-24D-RGB	KU-3838-30D-RGB
KU-4040-12D-RGB	KU-4040-18D-RGB	KU-4040-24D-RGB	KU-4040-30D-RGB
KU-5050-36D-RGB	KU-5050-42D-RGB	KU-5050-48D-RGB	KU-5050-60D-RGB
KU-3528-36D-RGB	KU-3528-42D-RGB	KU-3528-48D-RGB	KU-3528-60D-RGB
KU-2835-36D-RGB	KU-2835-42D-RGB	KU-2835-48D-RGB	KU-2835-60D-RGB
KU-3535-36D-RGB	KU-3535-42D-RGB	KU-3535-48D-RGB	KU-3535-60D-RGB
KU-3838-36D-RGB	KU-3838-42D-RGB	KU-3838-48D-RGB	KU-3838-60D-RGB
KU-4040-36D-RGB	KU-4040-42D-RGB	KU-4040-48D-RGB	KU-4040-60D-RGB
KU-5050-72D-RGB	KU-5050-84D-RGB	KU-5050-96D-RGB	KU-5050-120D-RGB
KU-3528-72D-RGB	KU-3528-84D-RGB	KU-3528-96D-RGB	KU-3528-120D-RGB
KU-2835-72D-RGB	KU-2835-84D-RGB	KU-2835-96D-RGB	KU-2835-120D-RGB
KU-3535-72D-RGB	KU-3535-84D-RGB	KU-3535-96D-RGB	KU-3535-120D-RGB
KU-3838-72D-RGB	KU-3838-84D-RGB	KU-3838-96D-RGB	KU-3838-120D-RGB
KU-4040-72D-RGB	KU-4040-84D-RGB	KU-4040-96D-RGB	KU-4040-120D-RGB
KU-3535-RGB	KU-2835-RGB	KU-3528-RGB	KU-5050-RGB
KU-3838-RGB	KU-4040-RGB		

Address:Room 505A, 5th Floor, R&D Center Building, Hongfa Jateli High-tech Park,
Langxin Community, Shiyan Street, Baoan District, Shenzhen, China

Tel:+86-755-21002030

Fax:+86-755-21002030

<http://www.sz-ztl.cn/>



Certificate of Compliance

Certificate No. : WEB250402001RCC

Applicant : Shenzhen Kingunion Lighting Co., LTD

Address : Second Floor, 2# Building, Kaixinda Technology Park, No 49# Zhoushi Road, Langxin Village, Shiyan Town, Bao'an District, Shenzhen City, Guangdong

Manufacturer : Shenzhen Kingunion Lighting Co., LTD

Address : Second Floor, 2# Building, Kaixinda Technology Park, No 49# Zhoushi Road, Langxin Village, Shiyan Town, Bao'an District, Shenzhen City, Guangdong

Product : LED tape lights

Tested Model : KU-NE-0407-S-12V

Model list : KU-NE-0408-S-12V, KU-NE-0410-S-12V, KU-NE-0508-S-12V, KU-NE-0510-S-12V, KU-NE-0513-S-12V, KU-NE-0612-S-12V, KU-NE-0613-S-12V, KU-NE-0714-S-12V, KU-NE-0816-S-12V, KU-NE-0817-S-12V, KU-NE-0907-S-12V, KU-NE-0922-S-12V, KU-NE-1010-S-12V, KU-NE-1023-S-12V, KU-NE-1020-S-12V, KU-NE-1212-S-12V, KU-NE-1220-S-12V, KU-NE-1225-S-12V, KU-NE-1515-S-12V, KU-NE-1616-S-12V, KU-NE-2020-S-12V, KU-NE-3030-S-12V, KU-NE-0606-T-12V, KU-NE-1005-T-12V, KU-NE-1010-T-12V, KU-NE-1107-T-12V, KU-NE-1205-T-12V, KU-NE-1212-T-12V, KU-NE-1405-T-12V, KU-NE-1415-T-12V, KU-NE-1515-T-12V, KU-NE-1516-T-12V, KU-NE-1616-T-12V, KU-NE-2018-T-12V, KU-NE-2020-T-12V, KU-NE-3020-T-12V, KU-NE-3030-T-12V, KU-NE-1616-D-12V, KU-NE-1818-D-12V, KU-NE-2222-D-12V, KU-NE-2323-D-12V, KU-NE-2626-D-12V, KU-NE-1010-R-12V, KU-NE-1212-R-12V, KU-NE-1515-R-12V, KU-NE-1616-R-12V, KU-COB-MONO-12V, KU-COB-CCT-12V, KU-COB-RGB-12V, KU-COB-RGBW-12V, KU-NE-XXXX-Y-12V, KU-NE-0407-S-24V, KU-NE-0408-S-24V, KU-NE-0410-S-24V, KU-NE-0508-S-24V, KU-NE-0510-S-24V, KU-NE-0513-S-24V, KU-NE-0612-S-24V, KU-NE-0613-S-24V, KU-NE-0714-S-24V, KU-NE-0816-S-24V, KU-NE-0817-S-24V, KU-NE-0907-S-24V, KU-NE-0922-S-24V, KU-NE-1010-S-24V, KU-NE-1023-S-24V, KU-NE-1020-S-24V, KU-NE-1212-S-24V, KU-NE-1220-S-24V, KU-NE-1225-S-24V, KU-NE-1515-S-24V, KU-NE-1616-S-24V, KU-NE-2020-S-24V, KU-NE-3030-S-24V, KU-NE-0606-T-24V, KU-NE-1005-T-24V, KU-NE-1010-T-24V, KU-NE-1107-T-24V, KU-NE-1205-T-24V, KU-NE-1212-T-24V, KU-NE-1405-T-24V, KU-NE-1415-T-24V, KU-NE-1515-T-24V, KU-NE-1516-T-24V, KU-NE-1616-T-24V, KU-NE-2018-T-24V, KU-NE-2020-T-24V, KU-NE-3020-T-24V, KU-NE-3030-T-24V, KU-NE-1616-D-24V, KU-NE-1818-D-24V, KU-NE-2222-D-24V, KU-NE-2323-D-24V, KU-NE-2626-D-24V, KU-NE-1010-R-24V, KU-NE-1212-R-24V, KU-NE-1515-R-24V, KU-NE-1616-R-24V, KU-COB-MONO-24V, KU-COB-CCT-24V, KU-COB-RGB-24V, KU-COB-RGBW-24V, KU-NE-XXXX-Y-24V, KU-3535-XXXX-RGB, KU-3838-XXXX-RGB, KU-5050-XXXX-RGB, KU-2528-XXXX-RGB, KU-4040-XXXX-RGB, KU-5050-XXXX-RGB+CCT, KU-3838-XXXX-RGB+CCT, KU-2835-XXXX-RGB, KU-5050+W-XXXX-RGB, KU-2216-XXXX-CW, KU-2525-XXXX-CW, KU-2025-XXXX-CW, KU-2835-XXXX-CW, KU-3014-XXXX-CW, KU-4040-XXXX-CW, KU-5730-XXXX-CW, KU-315-XXXX-CW, KU-2835-XXXX, KU-2216-XXXX, KU-2025-XXXX, KU-3528-XXXX, KU-315-XXXX, KU-3030-XXXX, KU-4040-XXXX, KU-5730-XXXX

Trade Mark : /

The above products have been tested by us with listed standards and found in compliance with the directive RoHS 2011/65/EU & its amendment Directive (EU) 2015/863. It is possible to use CE marking to demonstrate the compliance with this RoHS.

Test standards:	Report(s) Number	Issued By	Issued Date
IEC 62321-3-1:2013 IEC 62321-4:2013+AMD1:2017 IEC 62321-5:2013 IEC 62321-6:2015 IEC 62321-7-1:2015 IEC 62321-7-2:2017 IEC 62321-8:2017	WEB250402001RC	WEBB	Apr. 09, 2025

The statement is based on a single evaluation of one sample of above mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.



**RoHS
Tested**



Young

Yong Tan Technical Manager

Apr. 09, 2025

Shenzhen Webb Testing Technology Co.,Ltd.

Tel: 86-755-23357269

Email: Info@webbtesting.com

[Http://www.webbtesting.com](http://www.webbtesting.com)

Shenzhen ZKT Technology Co., Ltd.

1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue,
Fuhai Street, Bao'an District, Shenzhen, China



Certificate of Compliance

Certificate Number: ZKT-25070215182C

Certificate's Holder : Dongguan Yihong Hardware Electronics Co., Ltd
Room 1106, No.2, Shangheng Road, Chang' an Town,
Dongguan

Manufacturer : Dongguan Yihong Hardware Electronics Co., Ltd
Room 1106, No.2, Shangheng Road, Chang' an Town,
Dongguan

Trade Mark : N/A

Product : LED controller

Model(s) : YH-6183
YH-252, YH-284, YH-290, YH-287, YH-358, YH-360, YH-6180,
YH-6184

Requirement	Standard	Report No.
Art.3.1(a) Safety	EN IEC 62368-1:2024+A11:2024	ZKT-25070215183S
Art.3.1(a) Health	EN IEC 62311:2020 EN 50665:2017	ZKT-25070215182E-1
Art.3.1(b) EMC	ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN 301 489-17 V3.3.0 (2024-07)	ZKT-25070215182E-2
Art.3.2 Radio	ETSI EN 300 328 V2.2.2 (2019-07)	ZKT-25070215182E-3

This Attestation of Compliance is issued on a voluntary basis for electrical equipment below the voltage limits of Radio Equipment Directive (RED) 2014/53/EU. The essential requirement are fulfilled accordingly based on the technical specifications applicable at the time of issuance.



This Certificate of Conformity is based on single evaluation of the submitted sample(s) of the above mentioned product. It does not imply an assessment of the whole product and relevant Directives to be observed.



KeySense Testing & Certification International Co., Ltd.
1-3F, Lab Building, No.29 District, Zhongkai Hi-Tech
Industrial Development Park, Huizhou, Guangdong,
China

Tel: 0752-3219929
Fax: 0752-3219929
<http://www.kst-cert.com>

Technical Compliance Statement

Certificate No.: KST240304E008Q01

Report No.: KST240304E008Q01

The following product has been tested by us with the listed standards and found in Compliance with the council EMC directive 2014/30/EU. It is demonstrative for the Compliance with this EMC Directive.

Holder: DONGGUAN BAIYOU ELECTRONIC CO LTD

Address: 2F A Building, Wufeng Industrial, Jintan Road, Danwu Shijie Town,
Dongguan, Guangdong

Product: USB CHARGER

Model Name: BY213-TD04-C

Trade Name: N/A

Test Standard	
EN 55032:2015+A1:2020	Electromagnetic compatibility of multimedia equipment – Emission requirements
EN IEC 61000-3-2:2019+A1: 2021	Electromagnetic Compatibility (EMC) Part 3-2: Limits - Limits for harmonic current emissions (equipment input current $\leq 16A$ per phase)
EN 61000-3-3:2013+A2: 2021	Electromagnetic Compatibility (EMC) Part 3-3: Limits - limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current $\leq 16A$ per phase and not subject to conditional connection
EN 55035:2017+A11:2020	Electromagnetic compatibility of multimedia equipment – Immunity requirements



Signature:

Name:

Jack.Li

Position:

Supervisor

Date:

April 26, 2024

The statement is based on single evaluation of one sample of above mentioned product. It does not imply an assessment of the whole production and does not permit the use of the test lab. Logo.



Importeur	Decobus Handel GmbH
Adresse	Innungsstraße 9,21244 Buchholz,Deutschland
Email/URL	https://www.decobusgroup.de
Hersteller	Shenzhen Kingunion Lighting Co., L TD
Adresse	Second Floor, No.1 Kaixinda Technology Park, No 49th Zhonshi Road,Langxin Community, Shiyan Town, Baoan District, Shenzhen City,Guangdong, China
Email/URL	https://www.sz-ztl.cn
Partienumm	202505
Hergestellt in	China
Produkt:LED soft light strip Model:KU-5050-60D-RGB	
Nennspannung5 V Nennfrequenz 50/60Hz Leist ung : 4.5W/M	
EC REP	Decobus Handel GmbH Innungsstraße 9,21244 Buchholz,Deutschland https://www.decobusgroup.de
Importeur	Decobus Handel GmbH
Adresse	Innungsstraße 9,21244 Buchholz,Deutschland
Email/URL	https://www.decobusgroup.de
Hersteller	Dongguan Yihong Hardware electronics Co., L TD
Adresse	Room 1106,N O.2 Shangheng Road,Chang'an Town Dongguan, Guangdong,523880 China
Email/URL	https://www.ptc-testing.com
Partienumm	202505
Hergestellt in	China
Produkt:2.4G Remote Controller Model:Y H-252.....	
Nennspannung5 V Nennfrequenz 50/60Hz Leist ung : 4.5W/M	
EC REP	Decobus Handel GmbH Innungsstraße 9,21244 Buchholz,Deutschland https://www.decobusgroup.de





Importeur	Decobus Handel GmbH		
Adresse	Innungsstraße 9,21244 Buchholz,Deutschland		
Email/URL	https://www.decobusgroup.de		
Hersteller	Guangdong Huasheng Electronic Technology Co., LTD		
Adresse	118# Dongguan Road,Shippai Town,Dongguan City, Guangdong Province,China		
Email/URL	https://www.ptc-testing.com		
Partienumm	202505		
Hergestellt in	China		
Produkt:LED Driver Model:HS24A-120200-CG			
Nennspannung5 V Nennfrequenz 50/60Hz Lei stung : 4.5W/M			
<table border="1"><tr><td>EC</td><td>REP</td></tr></table>	EC	REP	Decobus Handel GmbH Innungsstraße 9,21244 Buchholz,Deutschland https://www.decobusgroup.de
EC	REP		

EU DECLARATION OF CONFORMITY

1. Product model/product (product, type, batch or serial number):

HS24A-120200-CG / LED Driver 220-240V/0.8A/ 50Hz/60Hz

2. Name and address of the manufacturer or his authorised representative:

Guangdong Huasheng Electronic Technology Co., Ltd

118# Dongguan Road, Shippai Town, Dongguan City, Guangdong Province

3. This declaration of conformity is issued under the sole responsibility of the manufacturer.

4. Object of the declaration (identification of electrical equipment allowing traceability, it may include a colour image of sufficient clarity where necessary for the identification of the electrical equipment): HS24A-120200-CG / LED Driver 220-240V/0.8A/ 50Hz/60Hz

5. The object of the declaration described above is in conformity with the relevant Union harmonisation legislation: EMC Directive 2014/30/EU. Low Voltage Directive 2014/35/EU. RoHS Directive 2011/65/EU

6. References to the relevant harmonised standards used or references to the other technical specifications in relation to which conformity is declared:

EN 55032:2015 + A11:2020 + A1:2020, EN 55035:2017 + A11:2020, EN I EC 61000-3-2:2019 + A1:2021, EN 61000-3-3:2013 + A1:2019 + A2:2021

DIN VDE 0620-1(VDE 0620-1):2021-02, DIN VDE 0620-2-1 VDE 0620-2-1:2021-02/A1 VDE 0620-2-1/A1:2023-09, EN I EC 61558-1:2019, EN 61558-2-16:2009+A1:2013 IEC 62321-2:2021, IEC 62321-3-1:2013, IEC 62321-4:2013+AMD1:2017, IEC 62321-5:2013, IEC 62321-7-2: 2017 and IEC 62321-7-1: 2015, IEC 62321-6:2015

7. Additional information: Risk of electric shock. Do not open. For indoor use only.

Signed for and on behalf of:

Guangdong Huasheng Electronic Technology Co., Ltd

(place and date of issue): 2025.12.11

(name, function) (signature): 杨衍秀



DECLARATION OF CONFORMITY

We hereby,

Declare that our products listed below have fulfilled with relevant requirements of European Directives:

1. Company information:

Name	Dongguan Yihong Hardware electronics Co., LTD
Address	Room 1106,NO.2 Shangheng Road,Chang'an Town,Dongguan,Guangdong, 523880 China

2. Manufacture information:

Name	Dongguan Yihong Hardware electronics Co., LTD
Address	Room 1106,NO.2 Shangheng Road,Chang'an Town,Dongguan,Guangdong, 523880 China

3. Factory information:

Name	Dongguan Yihong Hardware electronics Co., LTD
Address	Room 1106,NO.2 Shangheng Road,Chang'an Town,Dongguan,Guangdong, 523880 China

4. Agent information:

Name	
Address	
Contact person	
Tel. No.	
E-mail	

5. Product information

Product Name	2.4G Remote Controller
Trade Mark	/
Model	YH-629 YH-252
Ratings	DC 3V

6. Conformity information:

The submitted sample(s) of the above products has(have) been tested and found to comply with the following European Directives:

European Directives	Standards	Test Report(s) Number
Radio equipment Directive -2014/53/EU RED / ROHS	ETSI EN 300 440 V2.2.1 (2018-07) ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN 301 489-3 V2.3.2 (2023-01) EN 62479:2010 EN IEC 62368-1:2020+A11:2020	PTC25082917901E-EM01 PTC25082917901E-EM02 PTC25082917901E-EM03 PTC25082917901S-LD01



7. Test lab information:

Test lab	Precise Testing & Certification(Guangdong)Co.,Ltd
Lab address	Building 1, No.6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

The marking as show below affixed on the products after all necessary conformity documentations have been prepared.



8. Obligation

The Manufacturer or the authorized representative's obligation is to make sure all requirements set in this declaration letter be fulfilled.

The CEO and the Owner of (Zeng Wenfeng) take the sole responsibility of that product.

Signature: *Zeng Wenfeng*

Address: Room 1106, NO.2 Shangheng Road, Chang'an Town, Dongguan, Guangdong, 523880 China

Date: *2025.10.18*

