
Installation sanleitung
Installation Instruction
Instruction d'installation

SKU:N623P514570 / N623P514571

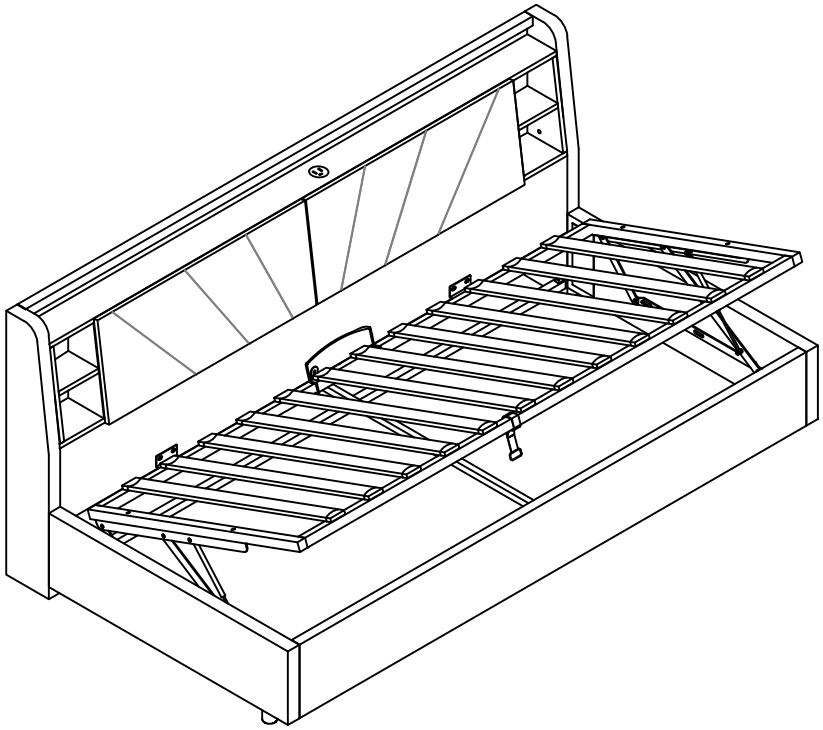

DE:Unser Produkt wird Ihnen in 2 Paketen geliefert. Die Lieferzeiten dieser 2 Pakete können abweichen, bitte haben Sie etwas Geduld und vielen Dank für Ihr Verständnis.

UK:Our product will be delivered to you in 2 packages. The delivery times of these 2 packages may differ, please be patient and thank you for your understanding.

FR:Notre produit vous sera livré en 2 colis. Les délais de livraison de ces 2 colis peuvent différer, soyez patient et merci pour votre compréhension.

English

IMPORTANT FOR GAS LIFT BEDS&MAINTAINCE

- Please place the mattress on top of the bed frame.
- Please do not pull on the strap handles.
- Please press heavily to release the compressed gas.
- Periodically check all screw & fixings to ensure they are secure.
- When moving your product, carefully lift into place.
- Wipe clean with a slightly damp cloth- please do not use abrasive chemicals or bleach.
- Do NOT allow children to operate the lift mechanism.
- Do NOT allow children near the lift base when operating the mechanism.
- Do NOT stand inside the bed or the internal storage base.
- Do NOT overload the internal storage base.
- DO NOT jump on the product or any of its parts.

Deutsch

WICHTIG FÜR GASLIFT-BETTEN&WARTUNG

- Bitte legen Sie die Matratze oben auf den Bettrahmen.
- Bitte ziehen Sie nicht an den Gurtgriffen.
- Bitte drücken Sie kräftig, um das komprimierte Gas freizusetzen.
- Überprüfen Sie regelmäßig alle Schrauben und Befestigungen, um sicherzustellen, dass sie sicher sind.
- Wenn Sie Ihr Produkt bewegen, heben Sie es vorsichtig an seinen Platz.
- Mit einem leicht feuchten Tuch abwischen - bitte keine scheuernden Chemikalien oder Bleichmittel verwenden.
- Erlauben Sie Kindern NICHT, den Hebemechanismus zu bedienen.
- Lassen Sie Kinder NICHT in die Nähe des Liftsockels, wenn Sie den Mechanismus bedienen.
- Stellen Sie sich NICHT in das Bett oder in die Innenablage.
- Überlasten Sie den internen Liftsockel NICHT.
- Springen Sie NICHT auf das Produkt oder eines seiner Teile.

Français

IMPORTANT POUR LES LITS À RELEVAGE DE GAZ&MAINTENANCE

- Veuillez placer le matelas sur le dessus du cadre de lit.
- Ne tirez pas sur les poignées de la sangle.
- Appuyez fortement pour libérer le gaz comprimé.
- Vérifiez régulièrement que toutes les vis et fixations sont bien en place.
- Lorsque vous déplacez votre produit, soulevez-le avec précaution pour le mettre en place.
- Nettoyez avec un chiffon légèrement humide - n'utilisez pas de produits chimiques abrasifs ou d'eau de Javel.
- Ne laissez pas les enfants utiliser le mécanisme de levage.
- Ne laissez pas les enfants s'approcher de la base de levage lorsqu'ils actionnent le mécanisme.
- Ne vous tenez PAS à l'intérieur du lit ou de la base de stockage interne.
- Ne surchargez pas la base de stockage interne.
- Ne pas sauter sur le produit ou l'une de ses parties.

Italiano


IMPORTANTE PER I LETTI CON SOLLEVAMENTO A GAS E LA MANUTENZIONE


- Posizionare il materasso sopra la struttura del letto.
- Non tirare le maniglie della cinghia.
- Premere con forza per rilasciare il gas compresso.
- Controllare periodicamente tutte le viti e i fissaggi per assicurarsi che siano saldi.
- Quando si sposta il prodotto, sollevarlo con cautela.
- Pulire con un panno leggermente umido, senza usare prodotti chimici abrasivi o candeggina.
- NON permettere ai bambini di azionare il meccanismo di sollevamento.
- NON permettere ai bambini di avvicinarsi alla base di sollevamento quando si aziona il meccanismo.
- NON sostare all'interno del letto o della base di contenimento interna.
- NON sovraccaricare la base di contenimento interna.
- NON saltare sul prodotto o sulle sue parti.

Español


IMPORTANTE PARA LAS CAMAS ELEVADORAS DE GAS&MANTENIMIENTO

- Coloque el colchón sobre el somier.
- No tire de las asas de la correa.
- Presione con fuerza para liberar el gas comprimido.
- Compruebe periódicamente que todos los tornillos y fijaciones estén bien sujetos.
- Al mover el producto, levántelo con cuidado para colocarlo en su sitio.
- Limpie con un paño ligeramente humedecido; no utilice productos químicos abrasivos ni lejía.
- NO permita que los niños accionen el mecanismo de elevación.
- NO permita que los niños se acerquen a la base elevadora cuando accionen el mecanismo.
- NO se ponga de pie dentro de la cama o de la base de almacenamiento interna.
- NO sobrecargue el somier.
- NO salte sobre el producto ni sobre ninguna de sus piezas.

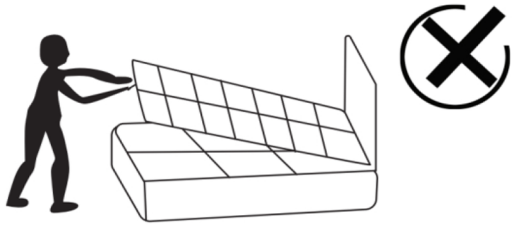







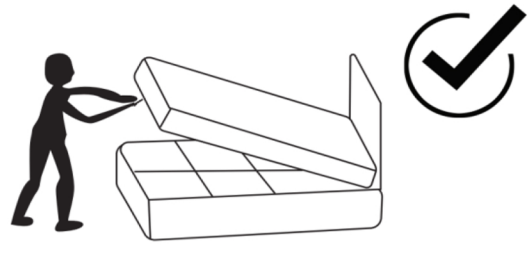


Detail View

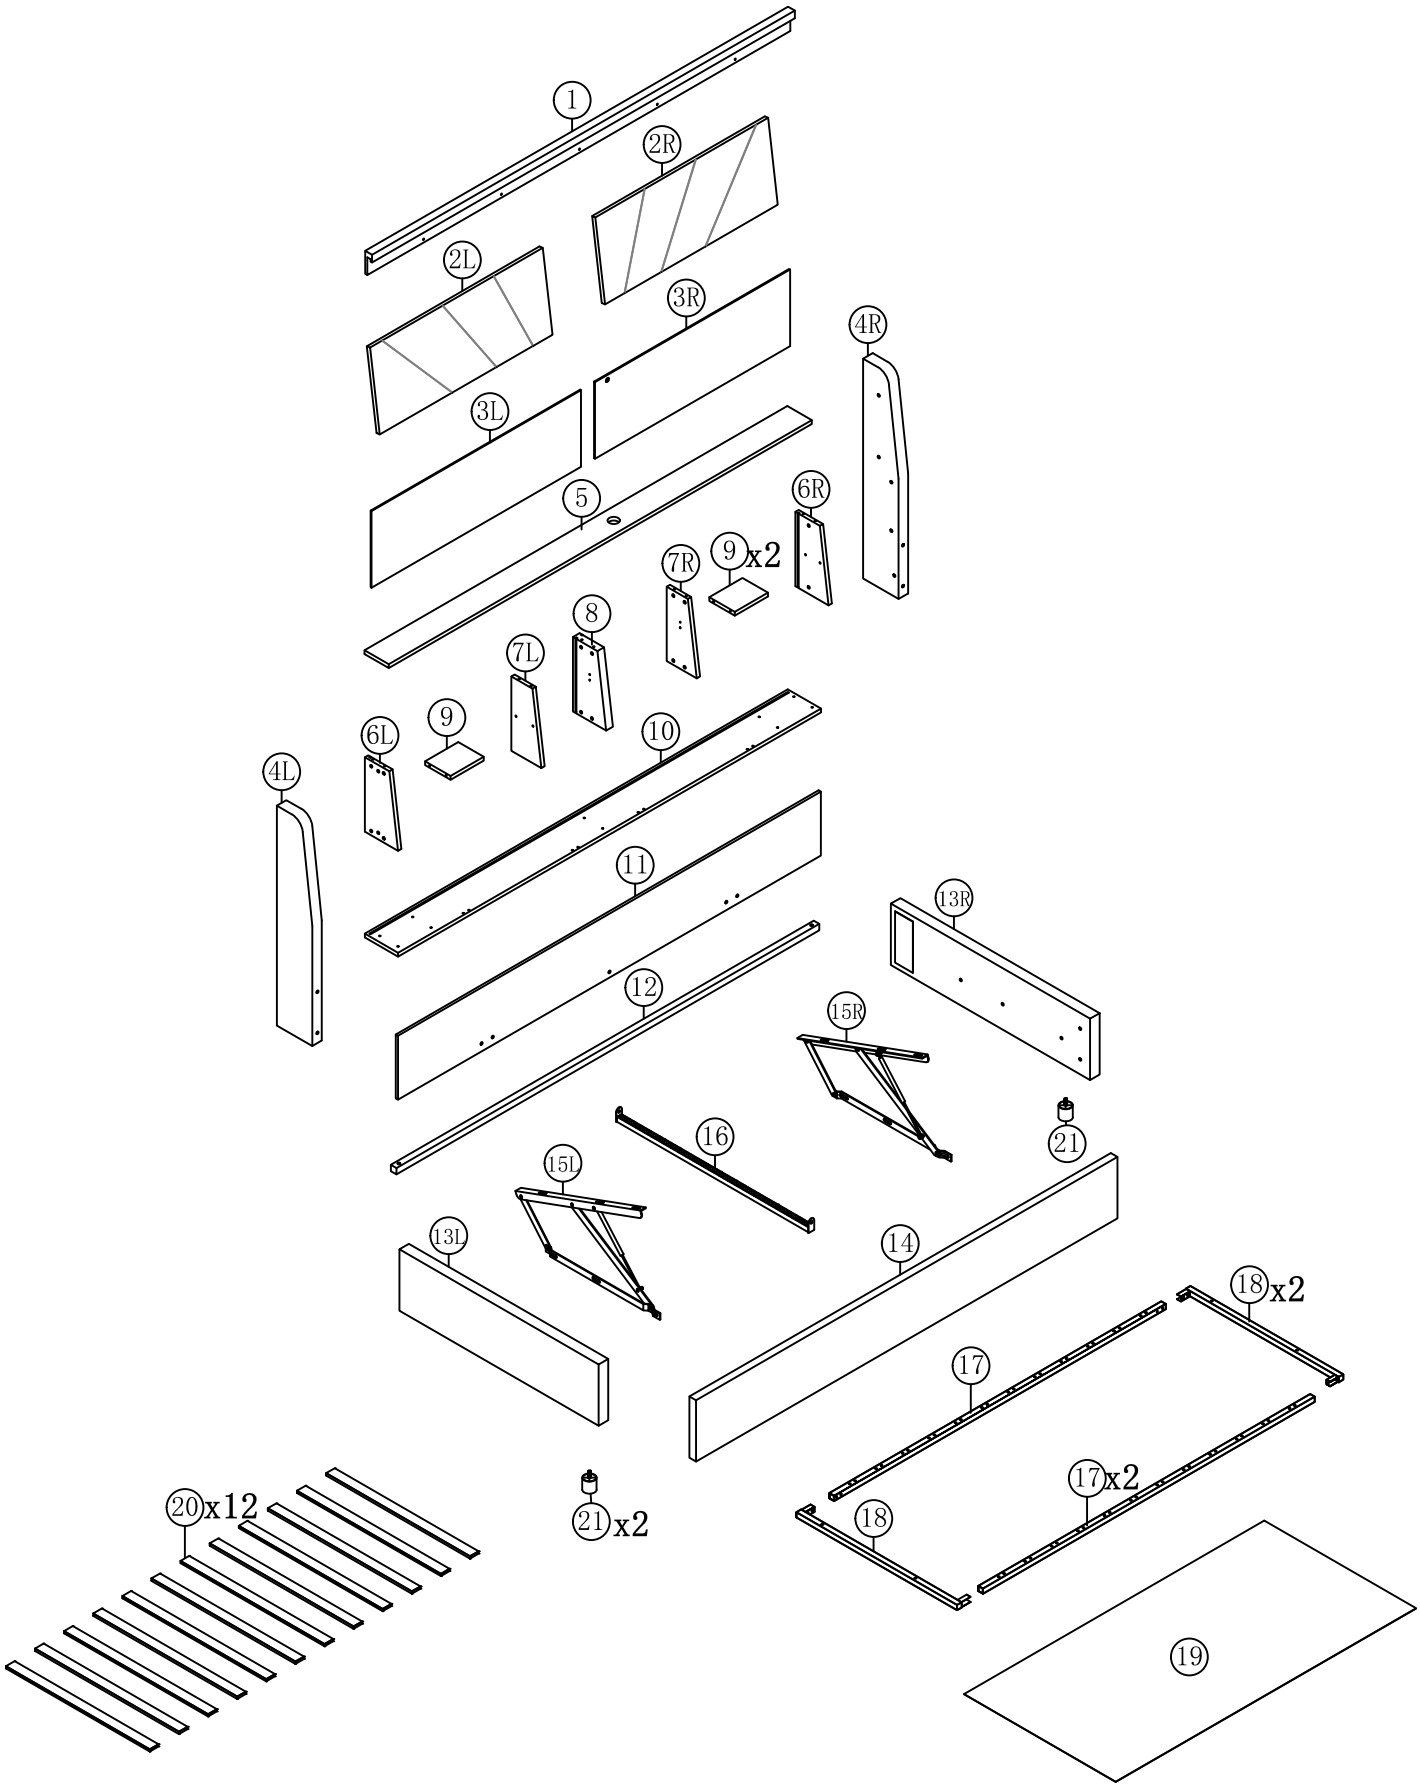
1
2R
2L
3R
4R
3L
5
6R
9 x2
7R
8
7L
9
6L
10
4L
11
13R
12
15R
21
16
15L
13L
14
18 x2
17
17 x2
18
21 x2
20 x12
19












Part List

N623P514571

2L x1  Surface of the backrest Oberfläche der Rückenlehne Surface du dossier	2R x1  Surface of the backrest Oberfläche der Rückenlehne Surface du dossier	3L x1  Back shelf board Hinteres Ablagebrett Tablette arrière	3R x1  Back shelf board Hinteres Ablagebrett Tablette arrière
4L x1  Side of the backrest Seite der Rückenlehne Côté du dossier	4R x1  Side of the backrest Seite der Rückenlehne Côté du dossier	13L x1  Foot board Fußbrett Pied de lit	13R x1  Foot board Fußbrett Pied de lit
15L x1  Gas lift Gasfeder Vérin à gaz	15R x1  Gas lift Gasfeder Vérin à gaz	16 x1  Cross bar Querleiste Traverse	20 x12  Slats Latten Lattes
21 x2  Bed legs Bettfüße Pieds de lit			














Part List

N623P514570

① x1  Top of the backrest Oberende der Rückenlehne Partie haute du dossier	⑤ x1  Top shelf board Oberes Ablagebrett Tablette supérieure	⑥L x1  Side shelf board Seitenablagebrett Tablette latérale	⑥R x1  Side shelf board Seitenablagebrett Tablette latérale
⑦L x1  Middle shelf board Mittleres Ablagebrett Tablette médiane	⑦R x1  Middle shelf board Mittleres Ablagebrett Tablette médiane	⑧ x1  Middle shelf board Mittleres Ablagebrett Tablette médiane	⑨ x2  Middle shelf board Mittleres Ablagebrett Tablette médiane
⑩ x1  Base shelf board Unteres Ablagebrett Tablette inférieure	⑪ x1  Bottom of the backrest Unterseite der Rückenlehne Partie basse du dossier	⑫ x1  Side wooden bar Seitenholzleiste Baguette latérale en bois	⑭ x1  Side rail Seitenleiste Rail latéral
⑰ x2  Side bar Seitenleiste Barre latérale	⑱ x2  Metal frame cross bar Querleiste des Metallrahmens Traverse du cadre métallique	⑲ x1  Black non-woven fabric Schwarzes Vliesstoff Tissu non tissé noir	

Hardware list

N623P514571

Ax1  Allen Key Inbusschlüssel clé Allen	Bx21  M8x12mm Bolts Bolzen boulons	Cx35  M8x18mm Bolts Bolzen boulons	Dx4  M8x30mm Bolts Bolzen boulons
Ex4  M8x45mm Bolts Bolzen boulons	Fx4  M8x50mm Bolts Bolzen boulons	Gx4  M8x1x22mm Washer Unterlegscheibe rondelle	Hx8  Nuts Muttern Écrous
Ix59  M3x16mm Nails Nägel clous	Jx5  M4x25mm Nails Nägel clous	Kx5  Washer Unterlegscheibe rondelle	Lx4  Nuts Muttern Écrous
Mx28  Drawer fittings Schubkastenbeschläge quincaillerie de tiroir	Nx28  Drawer fittings Schubkastenbeschläge quincaillerie de tiroir	Ox1  Spanner Schraubenschlüssel Clé à molette	Px4  "7" Connector 7-förmiger Verbinder connecteur en forme de 7
Qx8  Little "7" Connector Kleiner 7-förmiger Verbinder connecteur petit en forme de 7	Rx2  Four hole iron Vierlochwinkel équerre à quatre trous	Sx2  Hinge Scharniere Charnière	Tx4  Hinge Scharniere Charnière
Ux4  Left right Hinge Scharniere Charnière	Vx4  Roller latch Rollenverschluss verrou à rouleau	Wx1  Pull tape Zugband Sangle de tirage	Xx1  Stopper Anschlag Butoir
Yx1  USB	Zx1  LED	Z1x1  Power line Stromkabel câble d'alimentation	Z2x1  Power adapter Netzteil adaptateur secteur
Z3x1  Color controller Farbsteuergerät contrôleur de couleur	Z4x24  End slats cap Lattenendkappe Capuchon d'extrémité de lattes		

DE:Bitte beachten Sie, dass die Formen der Schrauben B 、C、D und E ähnlich sind. Bitte installieren Sie entsprechend der Anleitung und unterscheiden Sie sie!
UK:Please note that the shapes of screws B 、C、D and E are similar. Please install according to the instructions and distinguish them!
FR:Notez que les vis B 、C、D et E et ont des formes similaires. Veuillez les installer en suivant les instructions pour les séparer!

DE:Vor dem Einbau die Schrauben in die Löcher stecken und festziehen, aber nicht bis 100%, 70% bis 80% anziehen reicht aus. Schließlich, nachdem alle Schrauben installiert sind, ziehen Sie alle Schrauben auf 100 %.

Wenn Sie auf diese Probleme stoßen, wie z. B. Fehlausrichtung der Löcher oder Unfähigkeit, bestimmte Teile zu installieren, überprüfen Sie bitte, ob die Schrauben korrekt verwendet werden und passen Sie die Dichtigkeit der Schrauben an.

UK:Before installation, insert the screws into the holes and tighten them, but do not tighten them to 100%, 70% to 80% is sufficient. Finally, after all screws are installed, tighten all screws to 100%.

If you encounter these issues, such as if the holes cannot be aligned or some parts cannot be installed, please check if the screws are used correctly and adjust the tightness of the screws.


FR:Insérer la vis dans le trou avant la fin de l'assemblage, serrer la vis, mais ne pas serrer à 100%, 70% ~ 80% est correct. Enfin, une fois que toutes les vis sont bien serrées, toutes les vis sont serrées à 100%.

Si vous rencontrez ces problèmes, par exemple si les trous ne sont pas alignés ou si certaines pièces ne peuvent pas être montées, vérifiez que les vis sont utilisées correctement et Ajustez leur serrage.

Attention: Do not tighten the screws before completing the entire installation. If you have any difficulty with the installation process, please feel free to contact us.
Achtung: Ziehen Sie die Schrauben erst fest, wenn die gesamte Installation abgeschlossen ist. Wenn Sie beim Installationsvorgang Schwierigkeiten haben, können Sie sich gerne an uns wenden.
Attention : Ne serrez pas les vis avant d'avoir terminé l'installation. Si vous rencontrez des difficultés lors du processus d'installation, n'hésitez pas à nous contacter.

Step 1:


Fix USB Y to the Top shelf board ⑤ with Nails I by using Allen Key A.
Befestigen Sie das USB-Teil Y mit Nägeln I mithilfe des Inbusschlüssels A an der oberen Ablageplatte ⑤.
Fixez l'accessoire USB Y sur la tablette supérieure ⑤ à l'aide des clous I et de la clé Allen A.

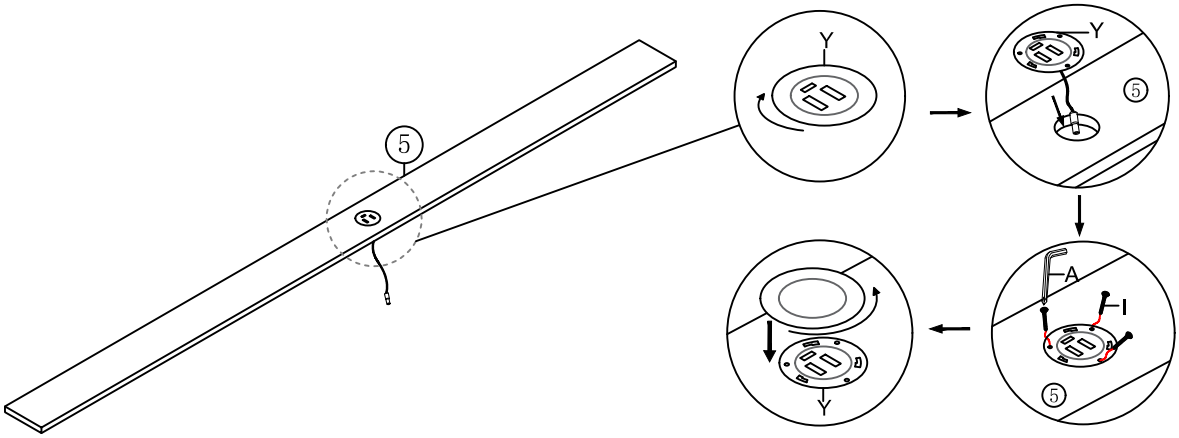

A	I x 3	Y x1
	 M3X16mm	

Step 2:


Fix Roller latch V1 to the Top shelf board ⑤ with Nails I by using Allen Key A.
Befestigen Sie den Rollverschluss V1 mit Nägeln I mithilfe des Inbusschlüssels A an der oberen Ablageplatte ⑤.
Fixez le verrou à galet V1 sur la tablette supérieure ⑤ à l'aide des clous I et de la clé Allen A.

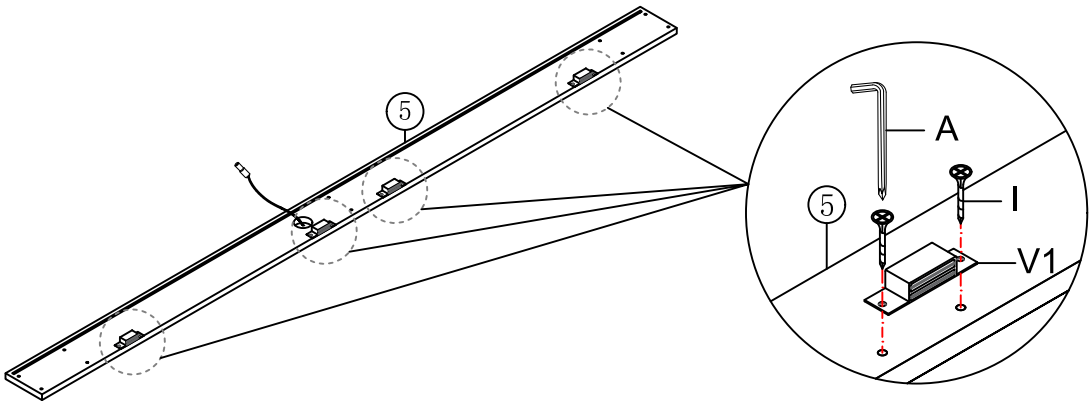

A	I x 8	V1 x4
	 M3X16mm	

Step 3:


Fix Hinge T to the Base shelf board ⑩ with Nails I by using Allen Key A.
Befestigen Sie das Scharnier T mit Nägeln I mithilfe des Inbusschlüssels A an der unteren Ablageplatte ⑩.
Fixez la charnière T sur la tablette inférieure ⑩ à l'aide des clous I et de la clé Allen A.

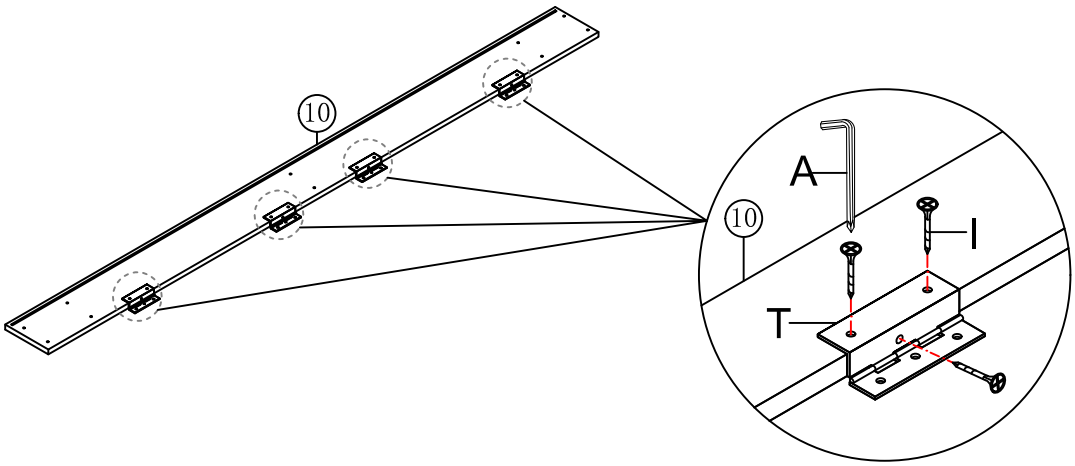

A	I x 12	T x4
	 M3X16mm	

Step 4:


Fix the Drawer fittings M to the Top shelf board ⑤, Base shelf board ⑩,Side shelf board ⑥ and Middle shelf board ⑦ by using Allen key A .
Befestigen Sie die Schubladenbeschläge M mithilfe des Inbusschlüssels A an der oberen Ablageplatte ⑤, der unteren Ablageplatte ⑩, der seitlichen Ablageplatte ⑥ und der mittleren Ablageplatte ⑦.
Fixez les accessoires de tiroir M sur la tablette supérieure ⑤, la tablette inférieure ⑩, la tablette latérale ⑥ et la tablette médiane ⑦ à l'aide de la clé Allen A.

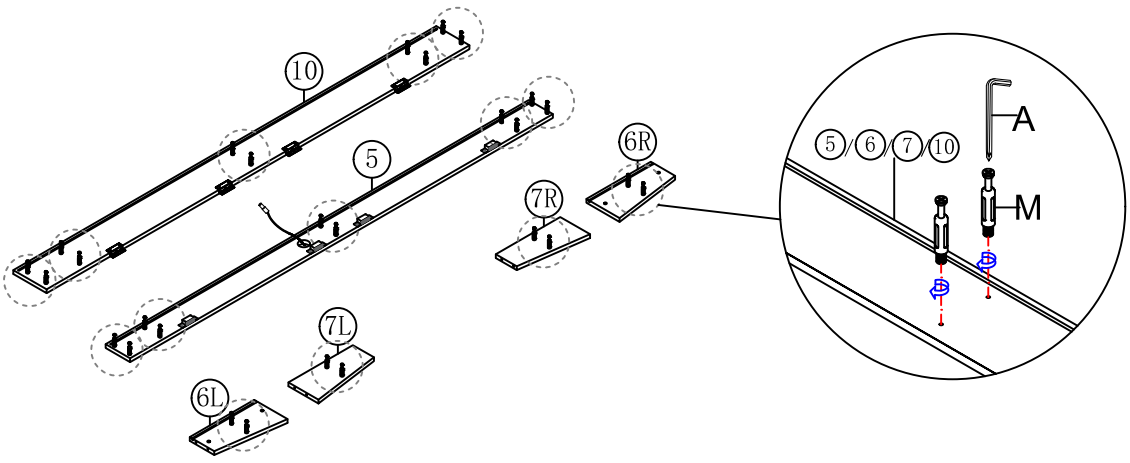

A	M x 28
	

Step 5:


Fix the Side shelf board ⑥ and Middle shelf board ⑦ to the Middle shelf board ⑨ with Drawer fittings N by using Allen Key A.
Befestigen Sie die Seitenablageplatte ⑥ und die mittlere Ablageplatte ⑦ mit den Schubladenbeschlägen N mithilfe des Inbusschlüssels A an der mittleren Ablageplatte ⑨.
Fixez la tablette latérale ⑥ et la tablette médiane ⑦ sur la tablette médiane ⑨ à l'aide des accessoires de tiroir N et de la clé Allen A.

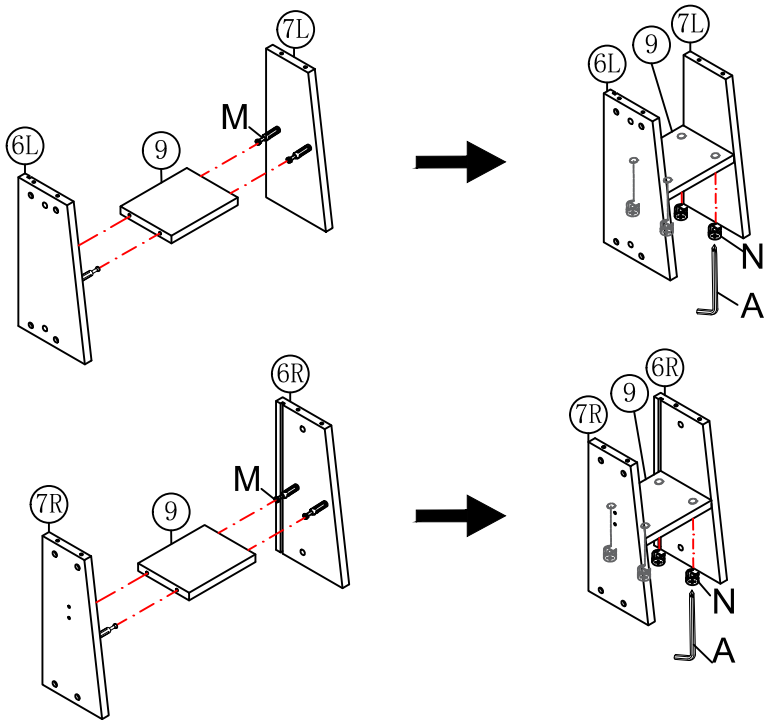

A	N x 8

Step 6:


Fix the Side shelf board ⑥ , Middle shelf board ⑦ and ⑧ to the Base shelf board ⑩ with Drawer fittings N by using Allen key A .
Befestigen Sie die Seitenablageplatte ⑥, die mittleren Ablageplatten ⑦ und ⑧ mit den Schubladenbeschlägen N mithilfe des Inbusschlüssels A an der unteren Ablageplatte ⑩.
Fixez la tablette latérale ⑥, les tablettes médianes ⑦ et ⑧ sur la tablette inférieure ⑩ à l'aide des accessoires de tiroir N et de la clé Allen A.

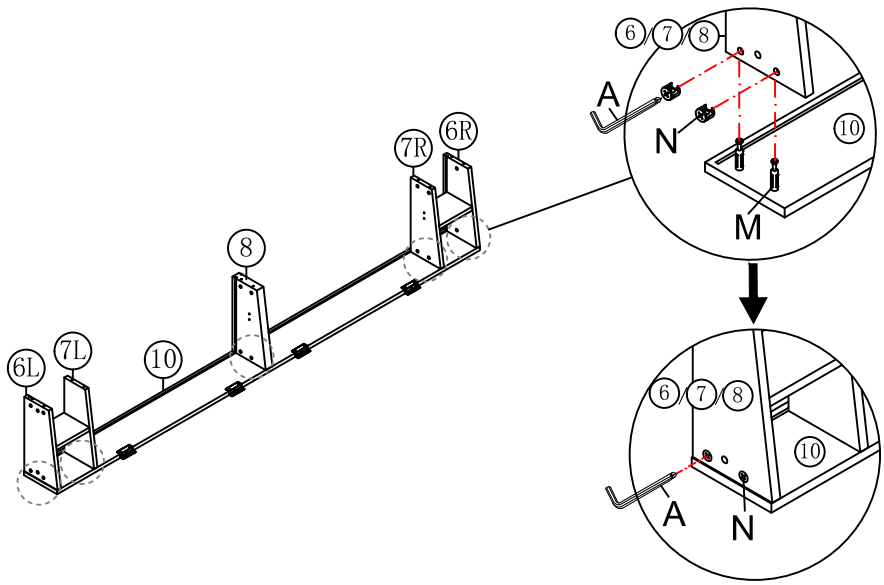

A	N x 10


Step 7:

Put Back shelf board ③ to Side shelf board ⑥ ,Middle shelf board ⑧ and Base shelf board ⑩ .
Setzen Sie die hintere Ablageplatte ③ auf die Seitenablageplatte ⑥, mittlere Ablageplatte ⑧ und untere Ablageplatte ⑩ auf.
Posez la tablette arrière ③ sur la tablette latérale ⑥, la tablette médiane ⑧ et la tablette inférieure ⑩.

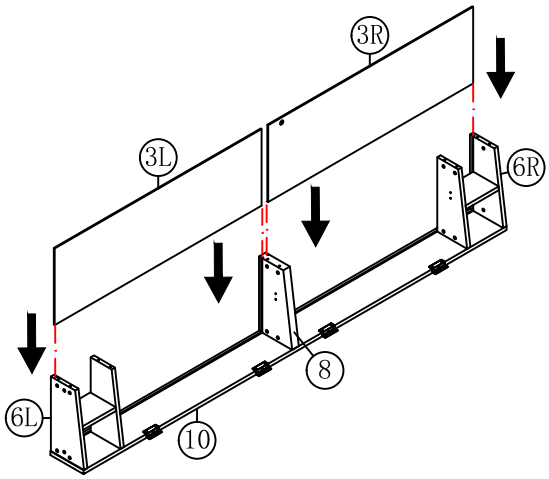

Step 8:


Fix the Top shelf board ⑤ to the Side shelf board ⑥ , Middle shelf board ⑦ and ⑧ with Drawer fittings N by using Allen key A .
Befestigen Sie die obere Ablageplatte ⑤ mit den Schubladenbeschlägen N mithilfe des Inbusschlüssels A an der Seitenablageplatte ⑥ sowie den mittleren Ablageplatten ⑦ und ⑧.
Fixez la tablette supérieure ⑤ sur la tablette latérale ⑥ et les tablettes médianes ⑦ et ⑧ à l'aide des accessoires de tiroir N et de la clé Allen A.

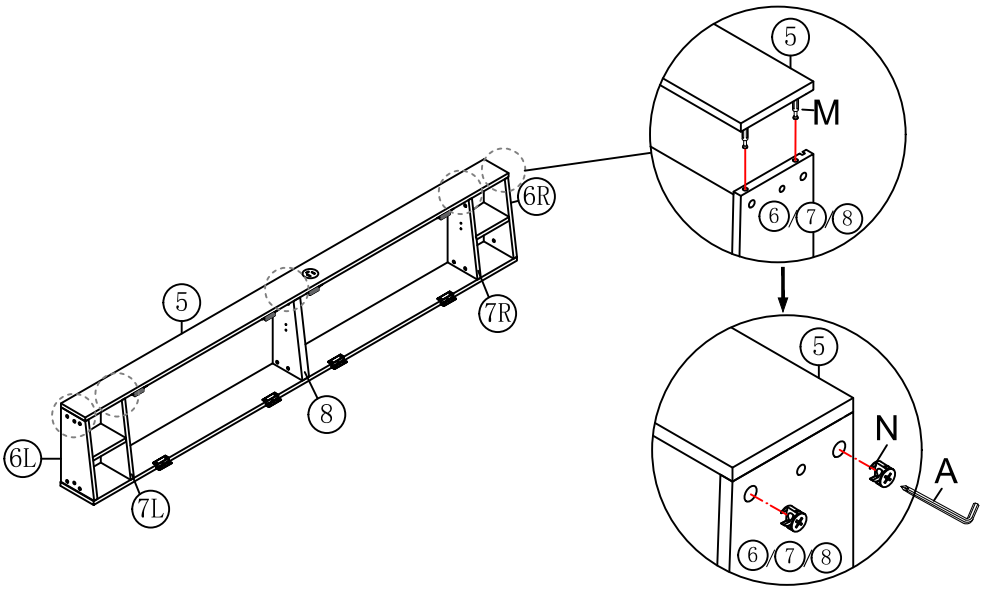

A	N x 10
	

Step 9:

Stick the LED Z to the Top shelf board ① .
Kleben Sie die LED-Leiste Z auf die obere Ablageplatte ①.
Collez la bande LED Z sur la tablette supérieure ①.

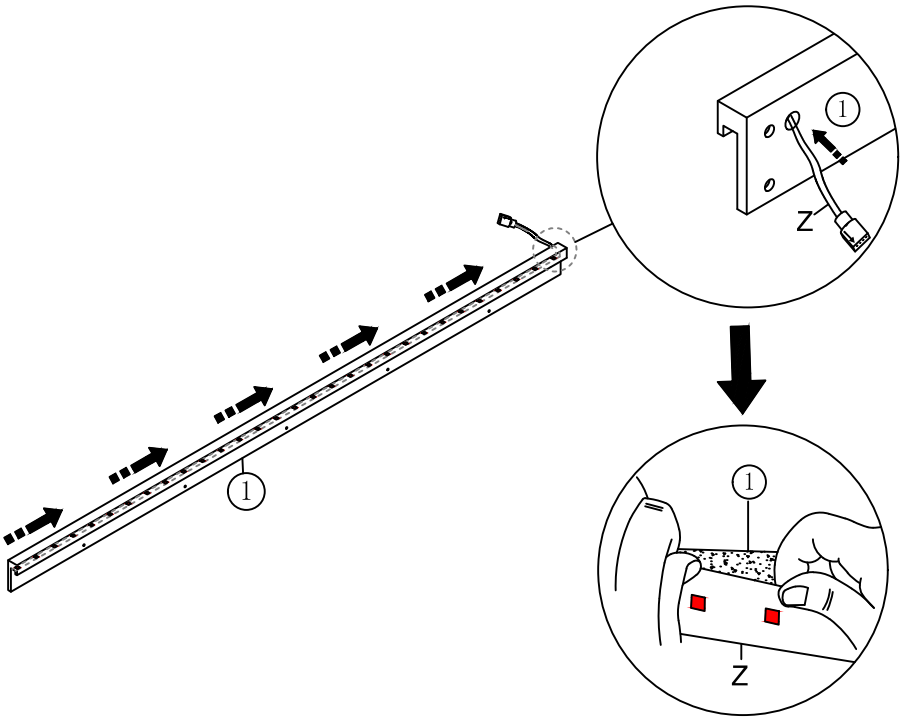


Z x 1



Step 10:

Fix the Side shelf board ⑥ to the Side of the backrest ④ with Bolts D by using Allen key A .
Befestigen Sie die Seitenablageplatte ⑥ mit Schrauben D mithilfe des Inbusschlüssels A an der Seite der Rückenlehne ④.
Fixez la tablette latérale ⑥ sur le côté du dossier ④ à l'aide des boulons D et de la clé Allen A.

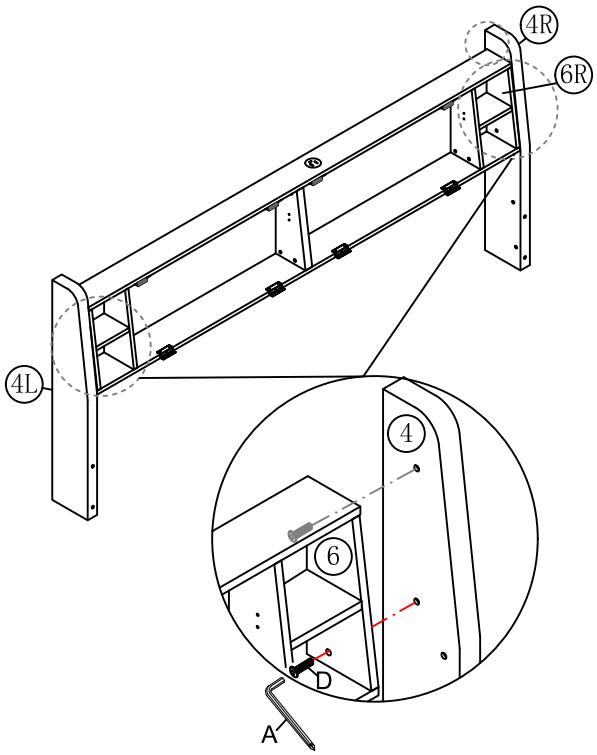

A




D x 4



M8x30mm

Step 11:


Fix the Top of the backrest ① to the Top shelf board ⑤ with Nails J and Washer K by using Allen key A .
Fix the Top of the backrest ① to the Side of the backrest ④ with Bolts B, Bolts C and Four hole iron R by using Allen key A .
Befestigen Sie das Oberteil der Rückenlehne ① mit Nägeln J und Unterlegscheiben K mithilfe des Inbusschlüssels A an der oberen Ablageplatte ⑤.Befestigen Sie das Oberteil der Rückenlehne ① mit Schrauben B, Schrauben C und Vierloch-Eisenwinkel R mithilfe des Inbusschlüssels A an der Seite der Rückenlehne ④.
Fixez la partie supérieure du dossier ① sur la tablette supérieure ⑤ à l'aide des clous J, des rondelles K et de la clé Allen A.Fixez la partie supérieure du dossier ① sur le côté du dossier ④ à l'aide des boulons B, des boulons C et du support métallique à quatre trous R et de la clé Allen A.

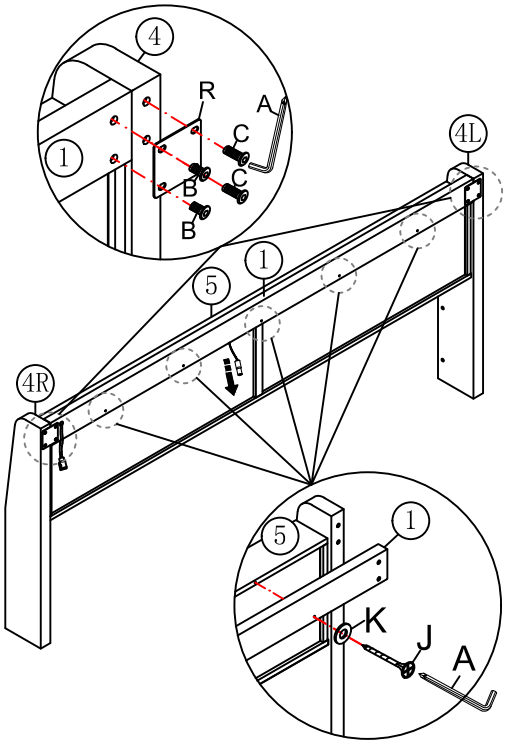

		K x 5	R x 2
A	B x 4 M8x12mm	C x 4 M8x18mm	J x 5 M4x25mm

Step 12:


Fix the Bottom of the backrest ⑪ to the Side of the backrest ④ and Base shelf board ⑩ with Bolts B and Little "7" Connector Q by using Allen key A .
Befestigen Sie das Unterteil der Rückenlehne ⑪ mit Schrauben B und kleinem L-Verbinder Q mithilfe des Inbusschlüssels A an der Seite der Rückenlehne ④ sowie der unteren Ablageplatte ⑩.
Fixez la partie basse du dossier ⑪ sur le côté du dossier ④ et la tablette inférieure ⑩ à l'aide des boulons B, du petit connecteur en L Q et de la clé Allen A.

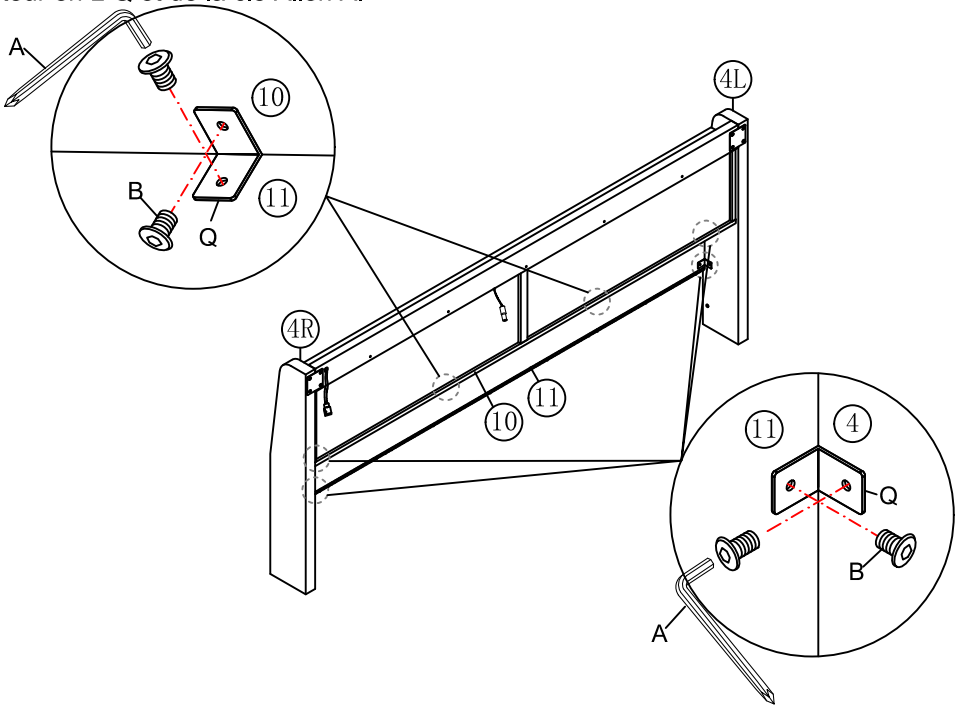


	Q x 6	
A	B x 12 M8x12mm	

Step 13:


Fix Hinge U to the Surface of the backrest ② with Nails I by using Allen key A.
Befestigen Sie das Scharnier U mit Nägeln I mithilfe des Inbusschlüssels A an der Oberfläche der Rückenlehne ②.
Fixez la charnière U sur la surface du dossier ② à l'aide des clous I et de la clé Allen A.

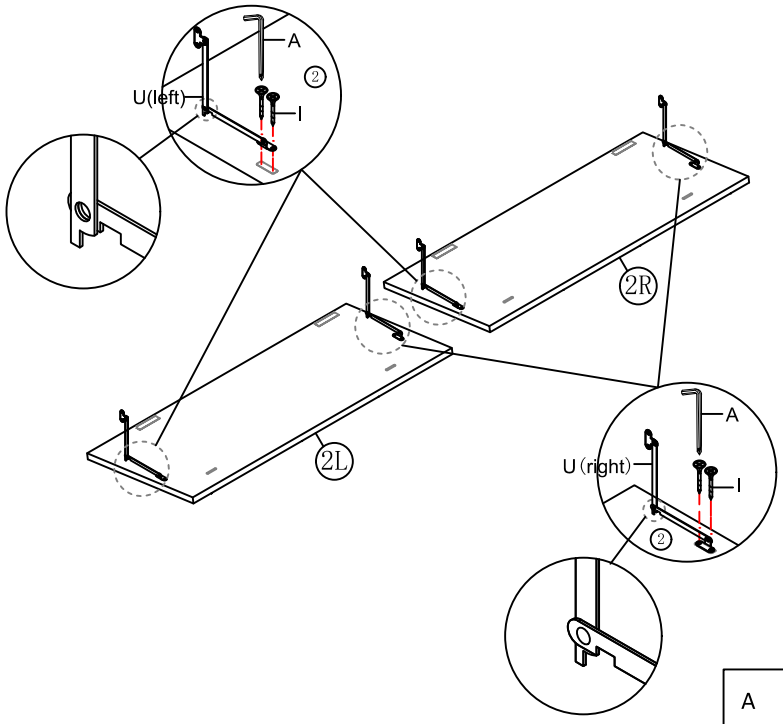

A	I x 8	U x 4
	 M3x16mm	 Left right

Step 14:


Fix Roller latch V2 to the Surface of the backrest ② with Nails I by using Allen key A.
Befestigen Sie den Rollverschluss V2 mit Nägeln I mithilfe des Inbusschlüssels A an der Oberfläche der Rückenlehne ②.
Fixez le verrou à galet V2 sur la surface du dossier ② à l'aide des clous I et de la clé Allen A.

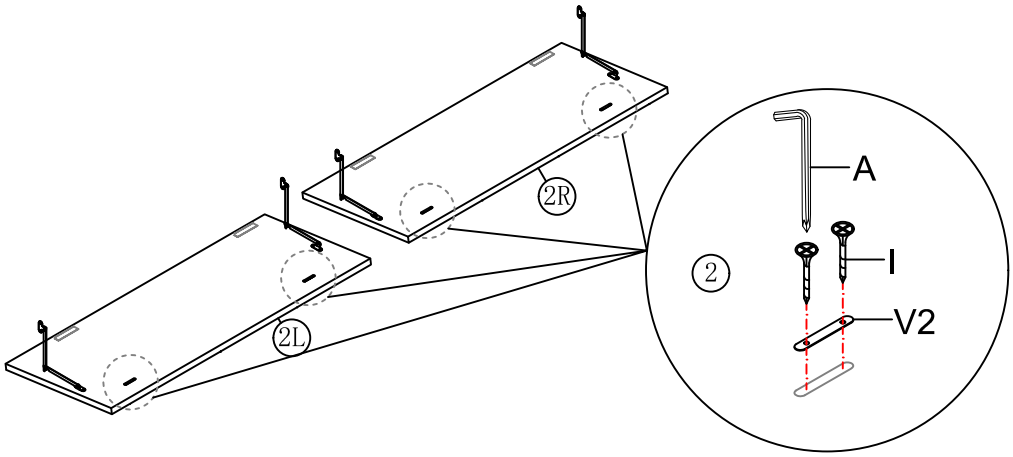

A	I x 8	V2 x 4
	 M3x16mm	

Step 15:


Fix Surface of the backrest ② to the Base shelf board ⑩ with Hinge T and Nails I by using Allen key A.
Befestigen Sie die Oberfläche der Rückenlehne ② mit dem Scharnier T und Nägeln I mithilfe des Inbusschlüssels A an der unteren Ablageplatte ⑩.
Fixez la surface du dossier ② sur la tablette inférieure ⑩ à l'aide de la charnière T, des clous I et de la clé Allen A.

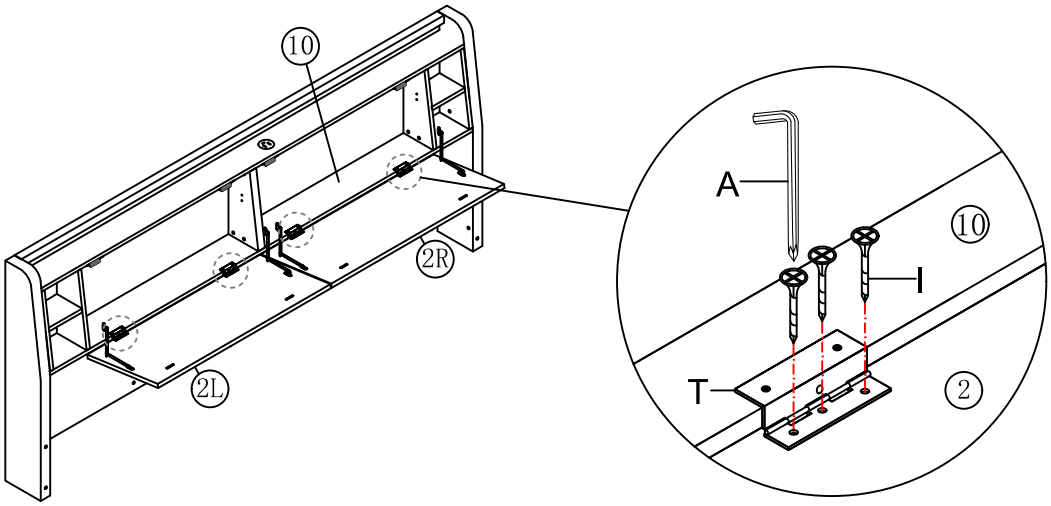

A	I x 12
	 M3x16mm

Step 16:


Fix Hinge U to the Middle shelf board ⑦ and ⑧ with Nails I by using Allen key A.
Befestigen Sie das Scharnier U mit Nägeln I mithilfe des Inbusschlüssels A an den mittleren Ablageplatten ⑦ und ⑧.
Fixez la charnière U sur les tablettes médianes ⑦ et ⑧ à l'aide des clous I et de la clé Allen A.

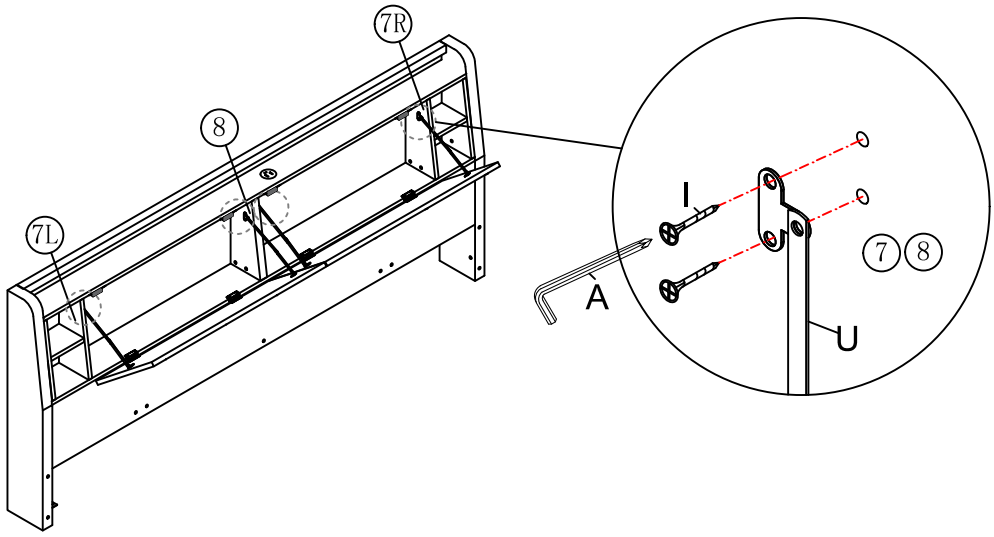

A	I x 8
	 M3x16mm


Step 17:

Fix Bed legs ㉑ to the Foot board ⑬ .
Befestigen Sie die Bettfüße ㉑ am Fußbrett ⑬.
Fixez les pieds de lit ㉑ sur le pied de lit ⑬.

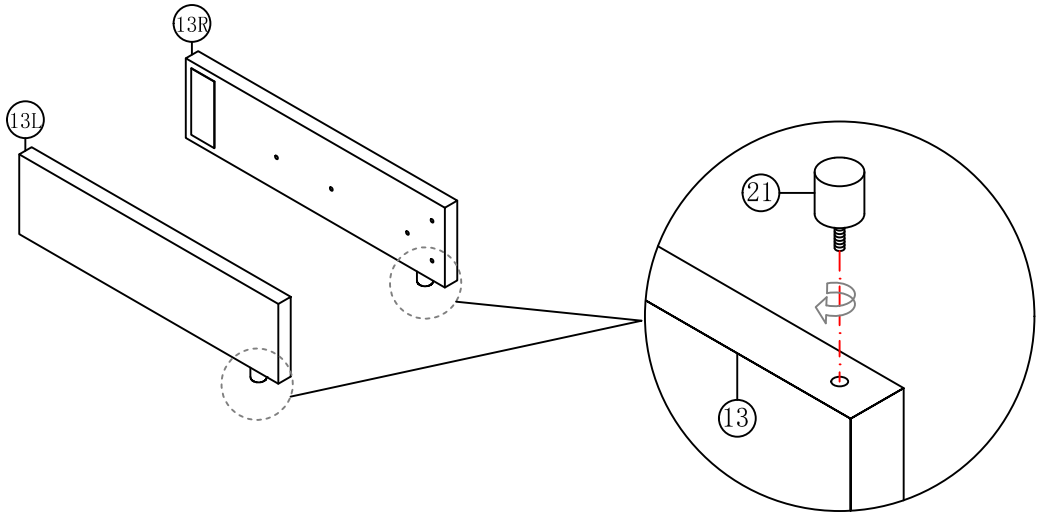

Step 18:

Fix Bolts F to the Side of the backrest ④.
Befestigen Sie die Schrauben F an der Seite der Rückenlehne ④.
Fixez les boulons F sur le côté du dossier ④.

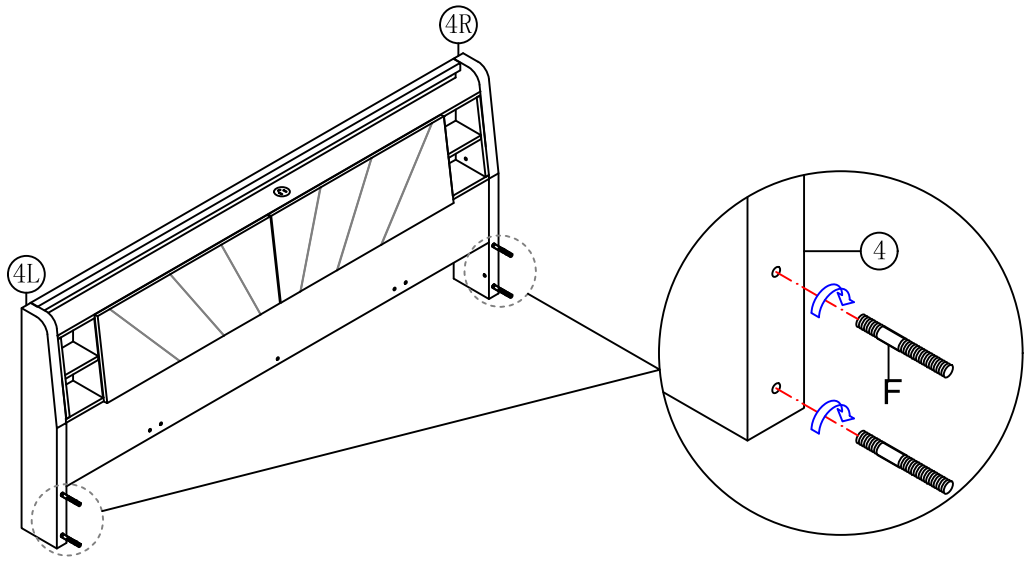


F x 4



M8x50mm

Step 19:


Fix Foot board ⑬ to the Side of the backrest ④ with Bolts F , Washer G and Nuts H by using Spanner O.
Befestigen Sie das Fußbrett ⑬ mit Schrauben F, Unterlegscheiben G und Muttern H mithilfe des Schraubenschlüssels O an der Seite der Rückenlehne ④.
Fixez le pied de lit ⑬ sur le côté du dossier ④ à l'aide des boulons F, rondelles G, écrous H et de la clé à molette O.

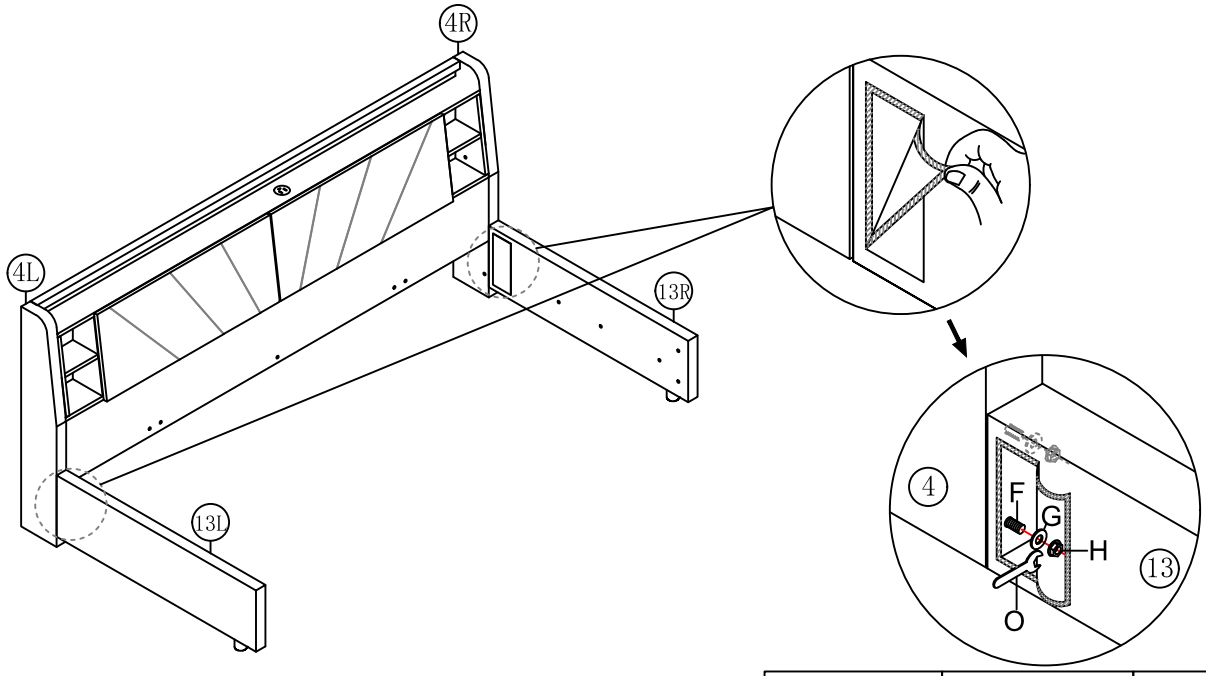

O	G x 4	H x 4
	 M8x1x22mm	

Step 20:


Fix Side rail ⑭ to Foot board ⑬ with Bolts C and Hinge S by using Allen key A.
Befestigen Sie die Seitenleiste ⑭ mit Schrauben C und Scharnier S mithilfe des Inbusschlüssels A am Fußbrett ⑬.
Fixez le rail latéral ⑭ sur le pied de lit ⑬ à l'aide des boulons C, de la charnière S et de la clé Allen A.

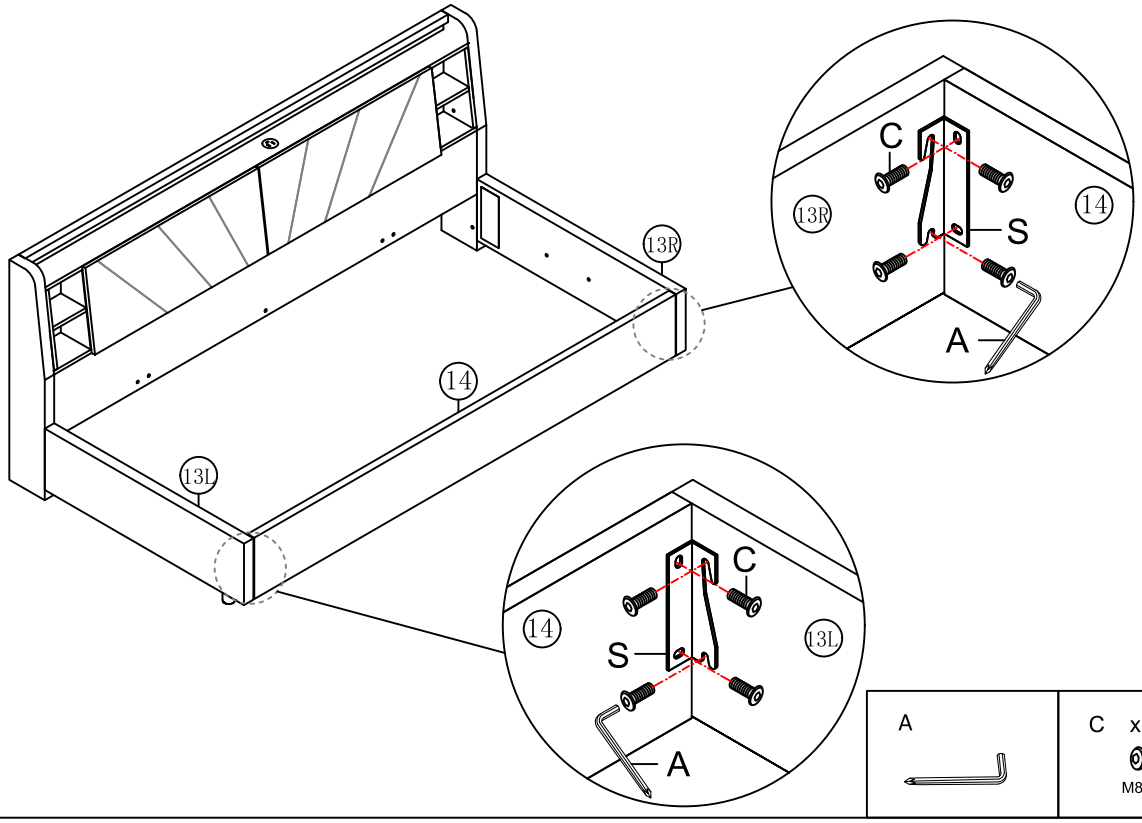

A	C x 8	S x 2
	 M8x18mm	

Step 21:


Fix Side wooden bar ⑫ to the Side of the backrest ④ with Bolts C and Little "7" Connector Q by using Allen key A.
Befestigen Sie die Seitenholzleiste ⑫ mit Schrauben C und kleinem L-Verbinder Q mithilfe des Inbusschlüssels A an der Seite der Rückenlehne ④.
Fixez la baguette latérale en bois ⑫ sur le côté du dossier ④ à l'aide des boulons C, du petit connecteur en L Q et de la clé Allen A.

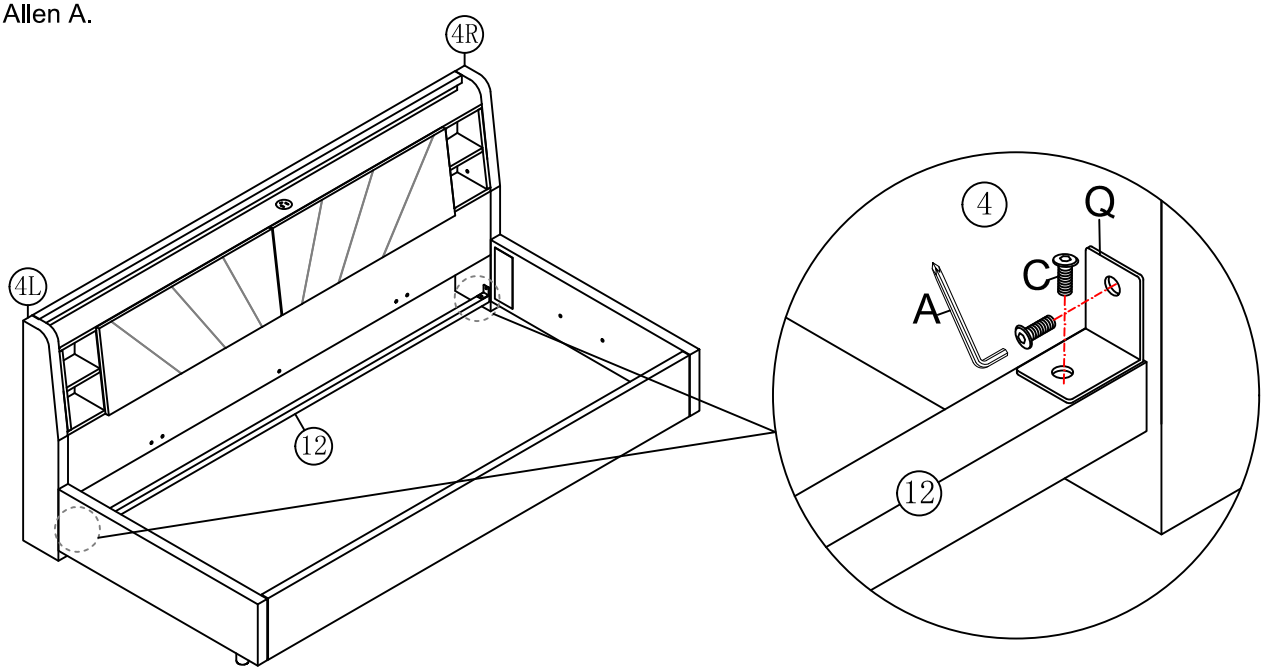

A	C x 4	Q x 2
	 M8x18mm	

Step 22:


Fix Cross bar ⑯ to the Bottom of the backrest ⑪ and Side rail ⑭ with Bolts B and C by using Allen key A.
Befestigen Sie die Querleiste ⑯ mit Schrauben B und C mithilfe des Inbusschlüssels A am Unterteil der Rückenlehne ⑪ und der Seitenleiste ⑭.
Fixez la traverse ⑯ sur la partie basse du dossier ⑪ et le rail latéral ⑭ à l'aide des boulons B, C et de la clé Allen A.

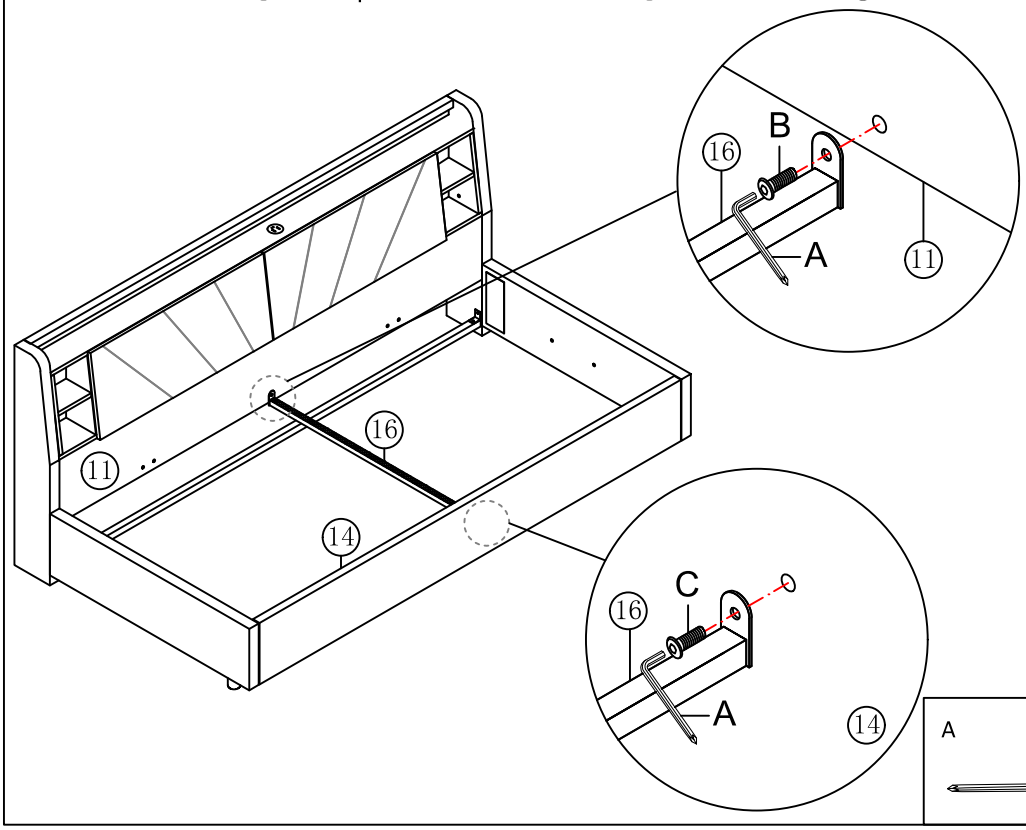

A	B x 1	C x 1
	 M8x12mm	 M8x18mm


Step 23:


Stick the Back non woven fabric ⑲ to the Foot board ⑬ ,Side rail ⑭ and Bottom of the backrest ⑪ .
Kleben Sie das hintere Vliesmaterial ⑲ auf das Fußbrett ⑬, die Seitenleiste ⑭ und das Unterteil der Rückenlehne ⑪ auf.
Collez le tissu non tissé arrière ⑲ sur le pied de lit ⑬, le rail latéral ⑭ et la partie basse du dossier ⑪.

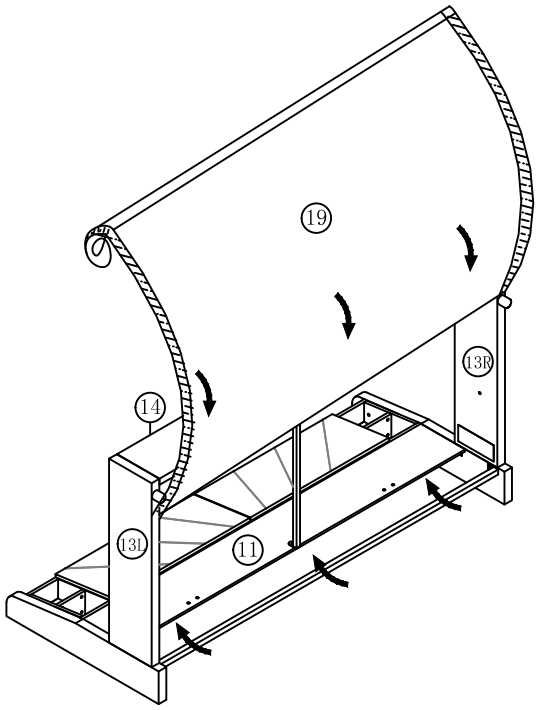

Step 24:


Fix the Gas lift ⑮ to the Foot board ⑬ with Bolts C by using Allen key A.
Fix the Gas lift bar to the Gas lift ⑮ with Nuts L by using Spanner O.
Befestigen Sie den Gasfederzylinder ⑮ mit Schrauben C mithilfe des Inbusschlüssels A am Fußbrett ⑬.
Befestigen Sie die Gasfederstange mit Muttern L mithilfe des Schraubenschlüssels O an der Gasfeder ⑮.
Fixez le vérin à gaz ⑮ sur le pied de lit ⑬ à l'aide des boulons C et de la clé Allen A.
Fixez la tige du vérin à gaz sur le vérin à gaz ⑮ à l'aide des écrous L et de la clé à molette O.

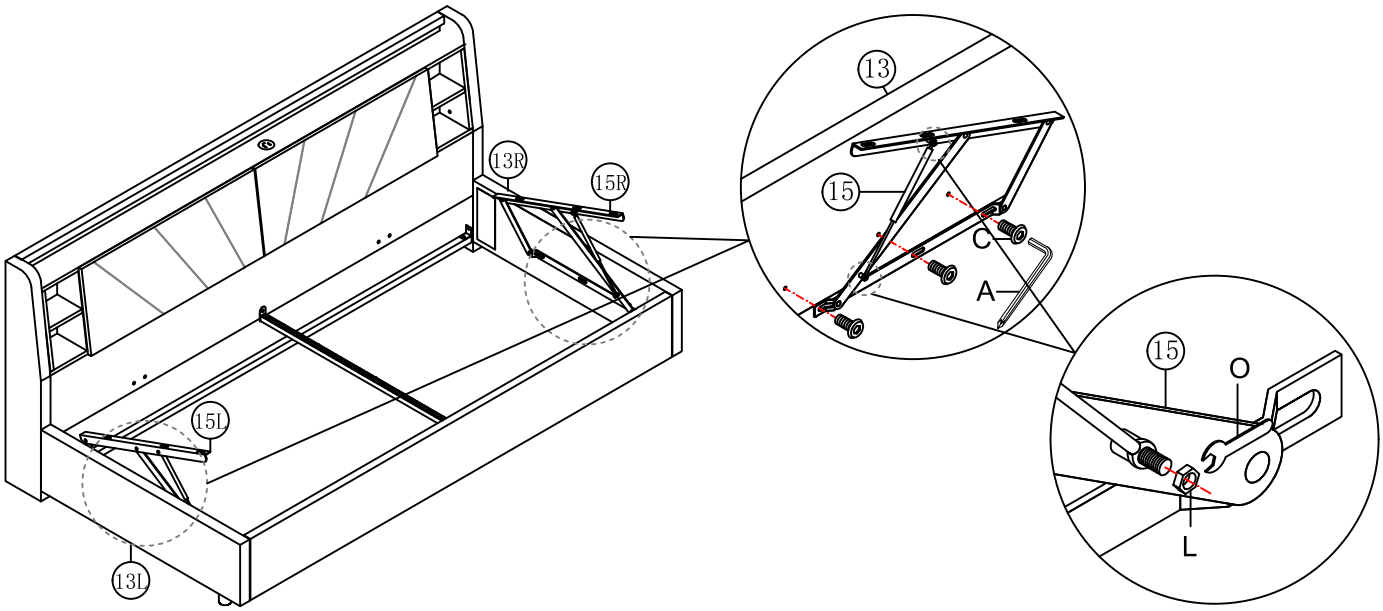

A	C x 6	L x 4	O
	 M8x18mm		

Step 25:


Fix "7" Connector P to the Side rail ⑭ with Bolts C by using Allen key A.
Fix "7" Connector P to the Bottom of the backrest ⑪ with Bolts B by using Allen key A.
Befestigen Sie den L-Verbinder P mit Schrauben C mithilfe des Inbusschlüssels A an der Seitenleiste ⑭.
Befestigen Sie den L-Verbinder P mit Schrauben B mithilfe des Inbusschlüssels A am Unterteil der Rückenlehne ⑪.
Fixez le connecteur en L P sur le rail latéral ⑭ à l'aide des boulons C et de la clé Allen A.
Fixez le connecteur en L P sur la partie basse du dossier ⑪ à l'aide des boulons B et de la clé Allen A.

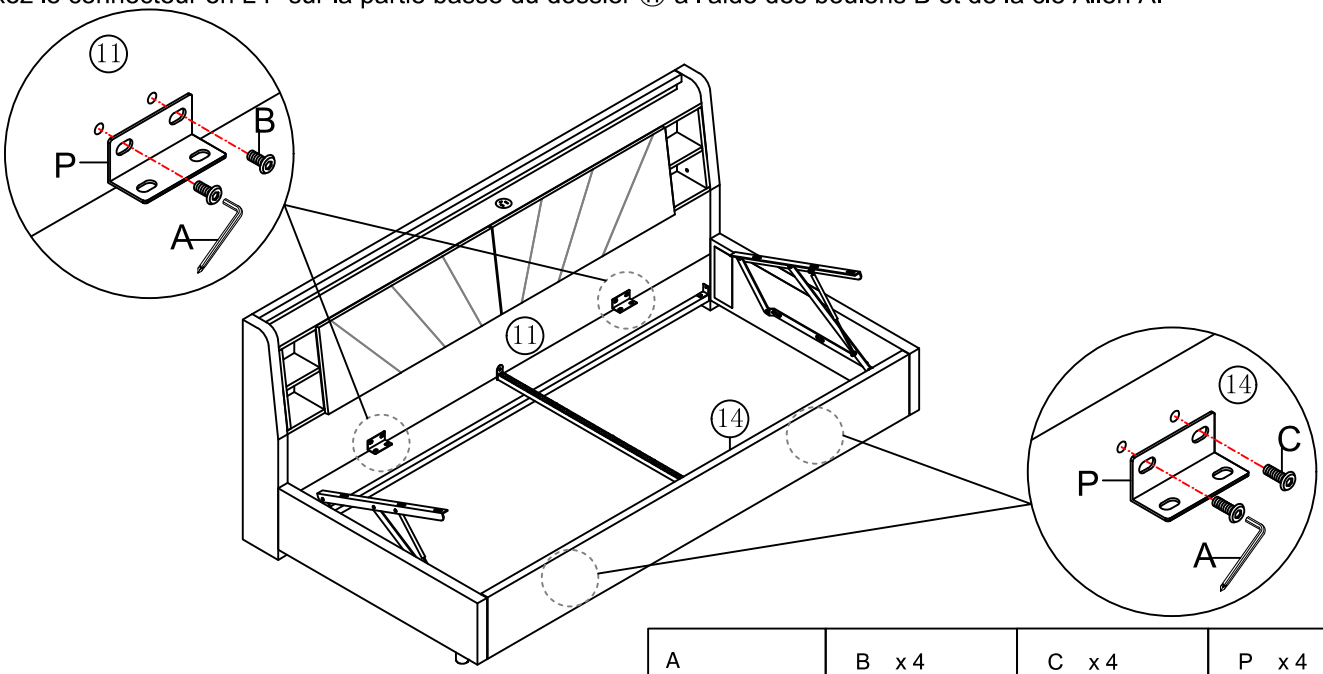

A	B x 4	C x 4	P x 4
	M8x12mm	M8x18mm	

Step 26:


Fix the Metal frame cross bar ⑱ to the Metal frame side bar ⑰ with Bolts C by using Allen key A .
Befestigen Sie die Metallrahmenquerstäbe ⑱ mit einem Innensechskantschlüssel A mit den Schrauben C an den Metallrahmenseitenstäben ⑰.
Fixer la barre transversale du cadre métallique ⑱ à la barre latérale du cadre métallique ⑰ avec une clé Allen a avec des boulons C.

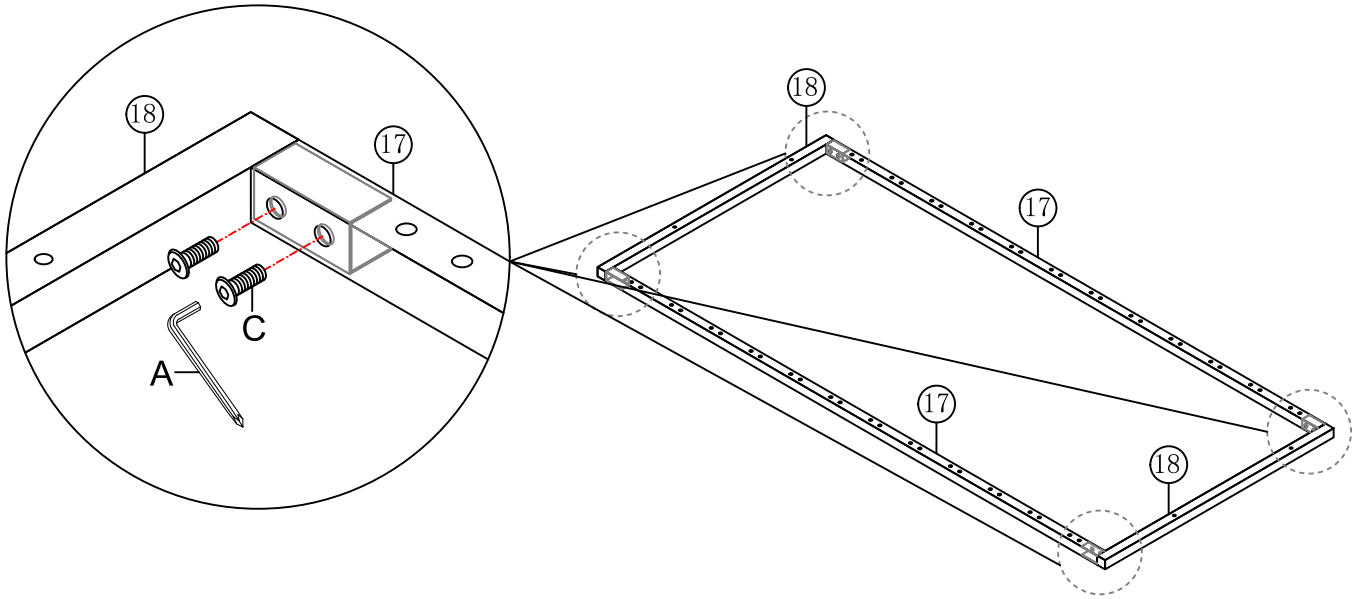

A	C x 8
	M8x18mm

Step 27:


Assemble the slats into the assembled slats frame with End slats cap Z4.
Montage der Lamellen in den zusammengebauten Lamellenrahmen mit Endlattenabdeckung Z4.
Assemblage des lattes dans le cadre de lattes assemblé avec le couvercle de lattes d'extrémité Z4.

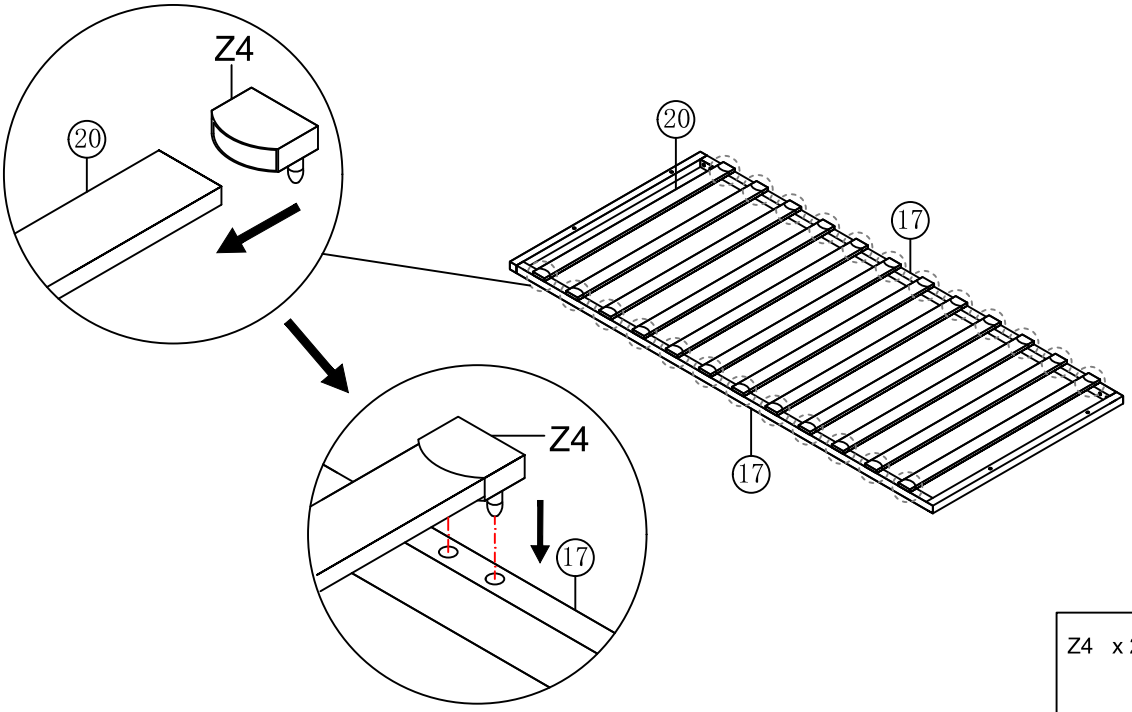


Z4 x 24


Step 28:


Fix the assembled slats frame to the Gas lift ⑮ with Bolts E and Nuts H by using Allen key A and Spanner O.
Befestigen Sie den vormontierten Lattenrahmen mit Schrauben E und Muttern H mithilfe des Inbusschlüssels A und des Schraubenschlüssels O an der Gasfeder ⑮.
Fixez le cadre à lattes assemblé sur le vérin à gaz ⑮ à l'aide des boulons E, écrous H, clé Allen A et clé à molette O.

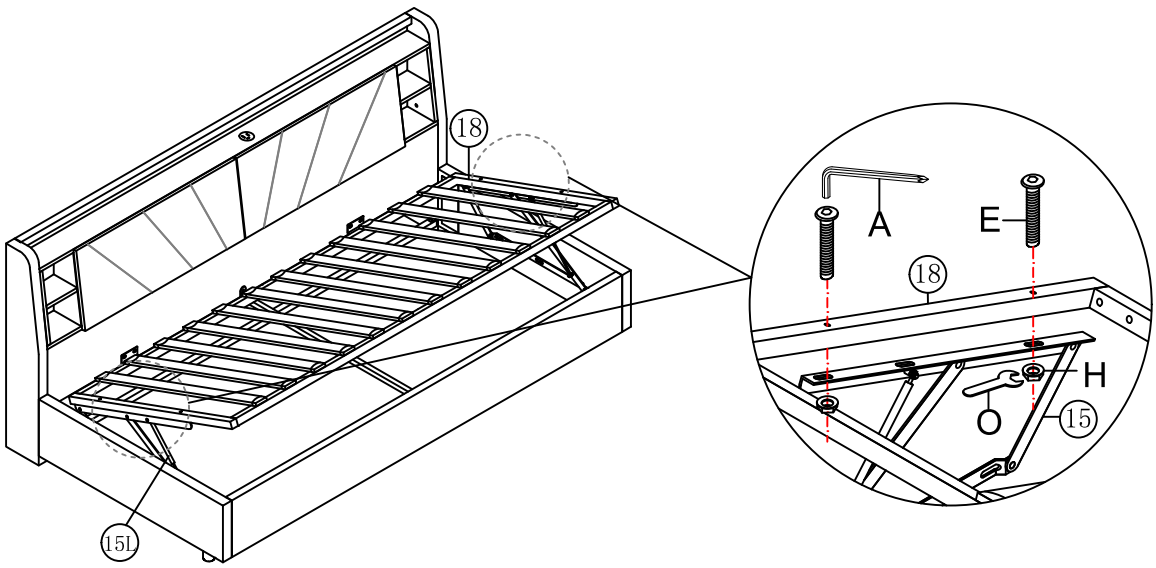


A	E x 4	H x 4	O
	 M8x45mm		

Step 29:


Put the Color controller Z3 to the Led Z,Put the Power line Z1 to the Color controller Z3 and USB Y,Put the Power adapter Z2 to the Power line Z1.
Verbinden Sie den Farbsteuerregler Z3 mit der LED-Leiste Z.Verbinden Sie das Stromkabel Z1 mit dem Farbsteuerregler Z3 und dem USB-Teil Y.Stecken Sie das Netzteil Z2 an das Stromkabel Z1 an.
Connectez le contrôleur de couleur Z3 à la bande LED Z.Branchez le câble d'alimentation Z1 sur le contrôleur de couleur Z3 et l'accessoire USB Y.Branchez l'adaptateur secteur Z2 sur le câble d'alimentation Z1.

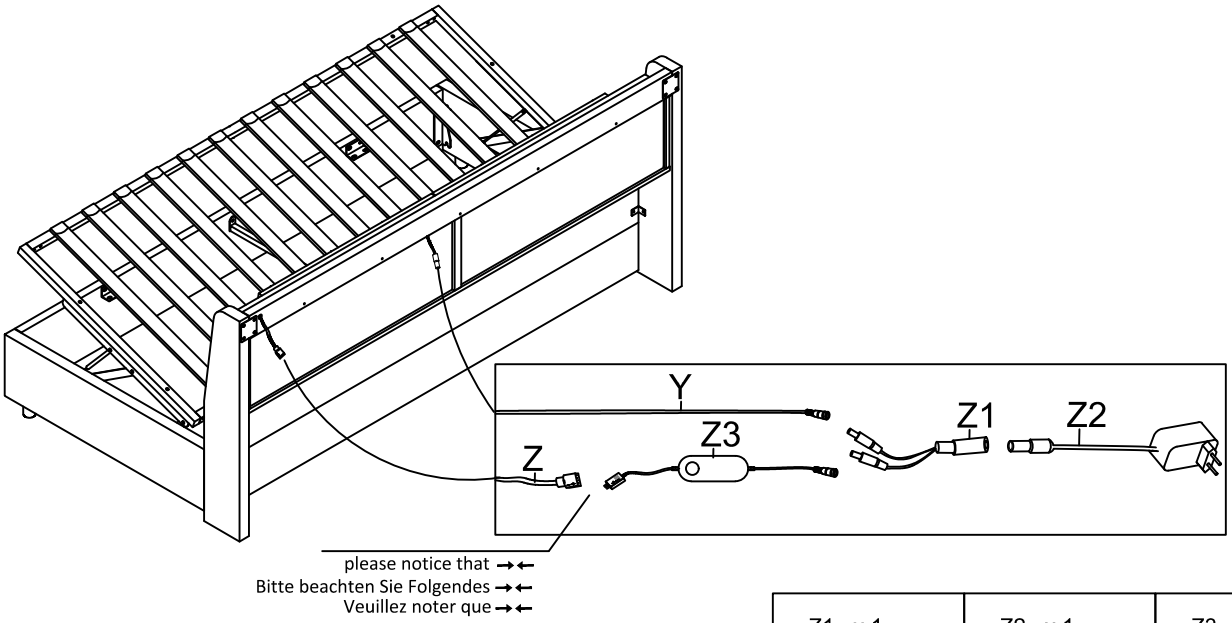

Z1 x 1	Z2 x 1	Z3 x 1
		

Step 30:


Put the pull tape W and Stopper X in side middle of the slat frame.
Bringen Sie das Zugband W und den Anschlag X an der inneren mittleren Stelle des Lattenrahmens an.
Placez la sangle de tirage W et le butoir X au milieu intérieur du cadre à lattes.

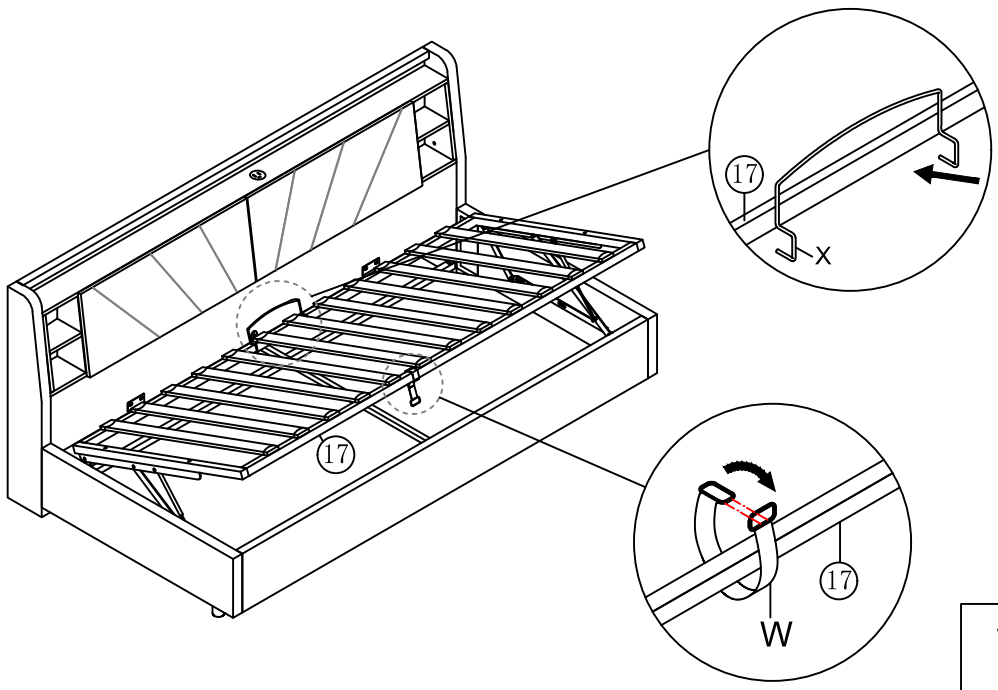


W x 1	X x 1
	


Step 31**:**


Every thing is finished now,please enjoy your bed.
Jetzt ist alles vorbei, bitte genießen Sie Ihr Bett.
Maintenant que c'est fini, s'il vous plaît, profitez de votre lit.

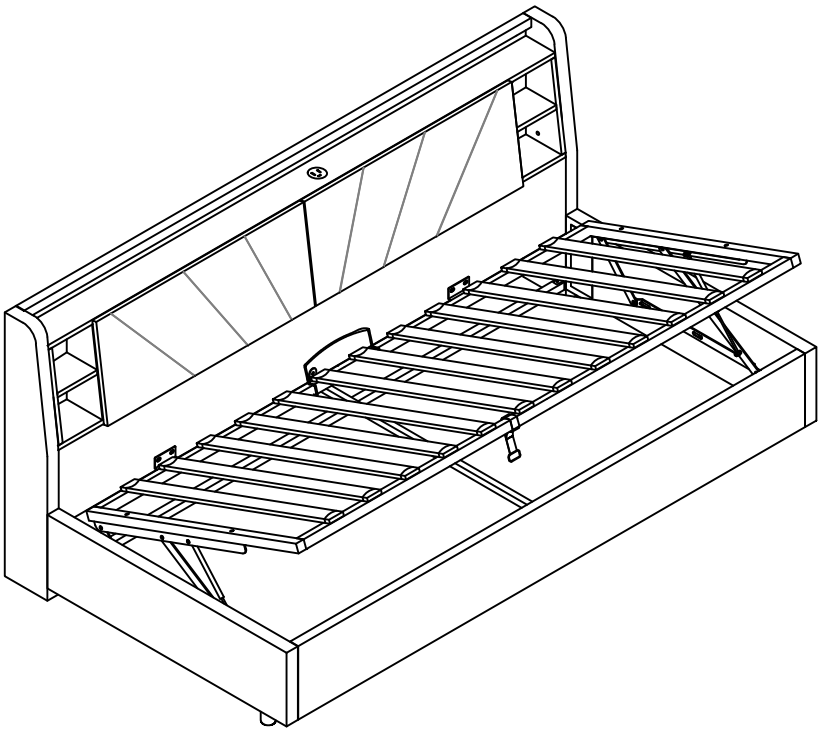




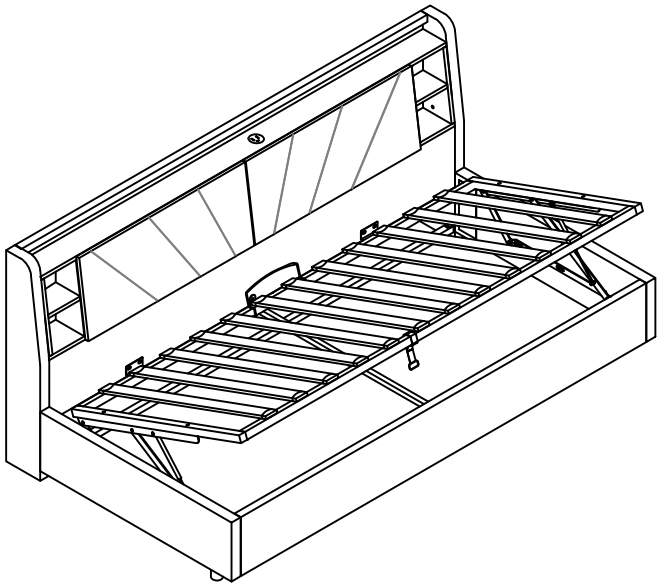

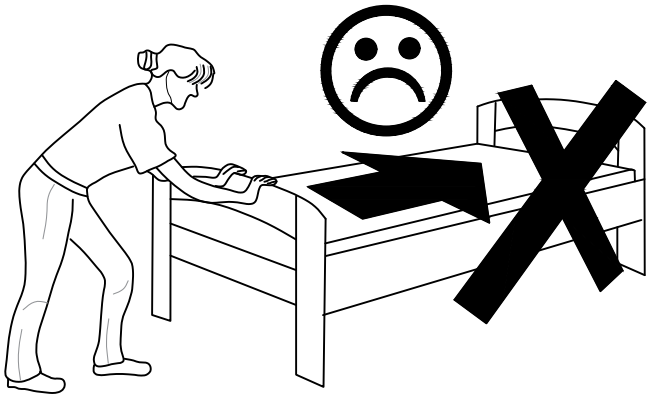


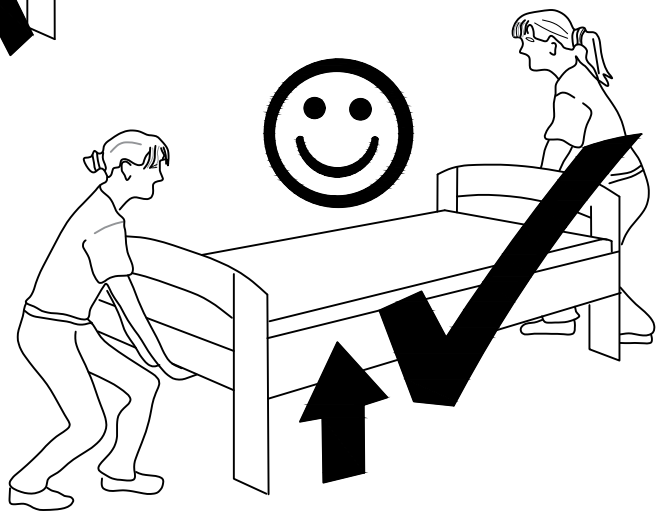

LED Bluetooth controller Features
Caractéristiques du contrôleur Bluetooth LED
LED Bluetooth Controller Eigenschaften

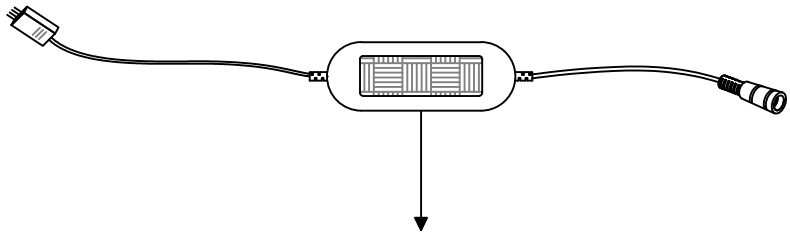

NOTICE:
Please scan the QR code to download the APP to control the color of the light strip.
Please refer to the following instructions for details.
Bitte scannen Sie den QR-Code, um die APP herunterzuladen, um die Farbe des Einzelheiten entnehmen Sie bitte der folgenden Anleitung.
Veuillez scanner le code QR pour télécharger l'application pour contrôler la couleur de la bande lumineuse.
Veuillez consulter les instructions ci-dessous pour plus de détails.

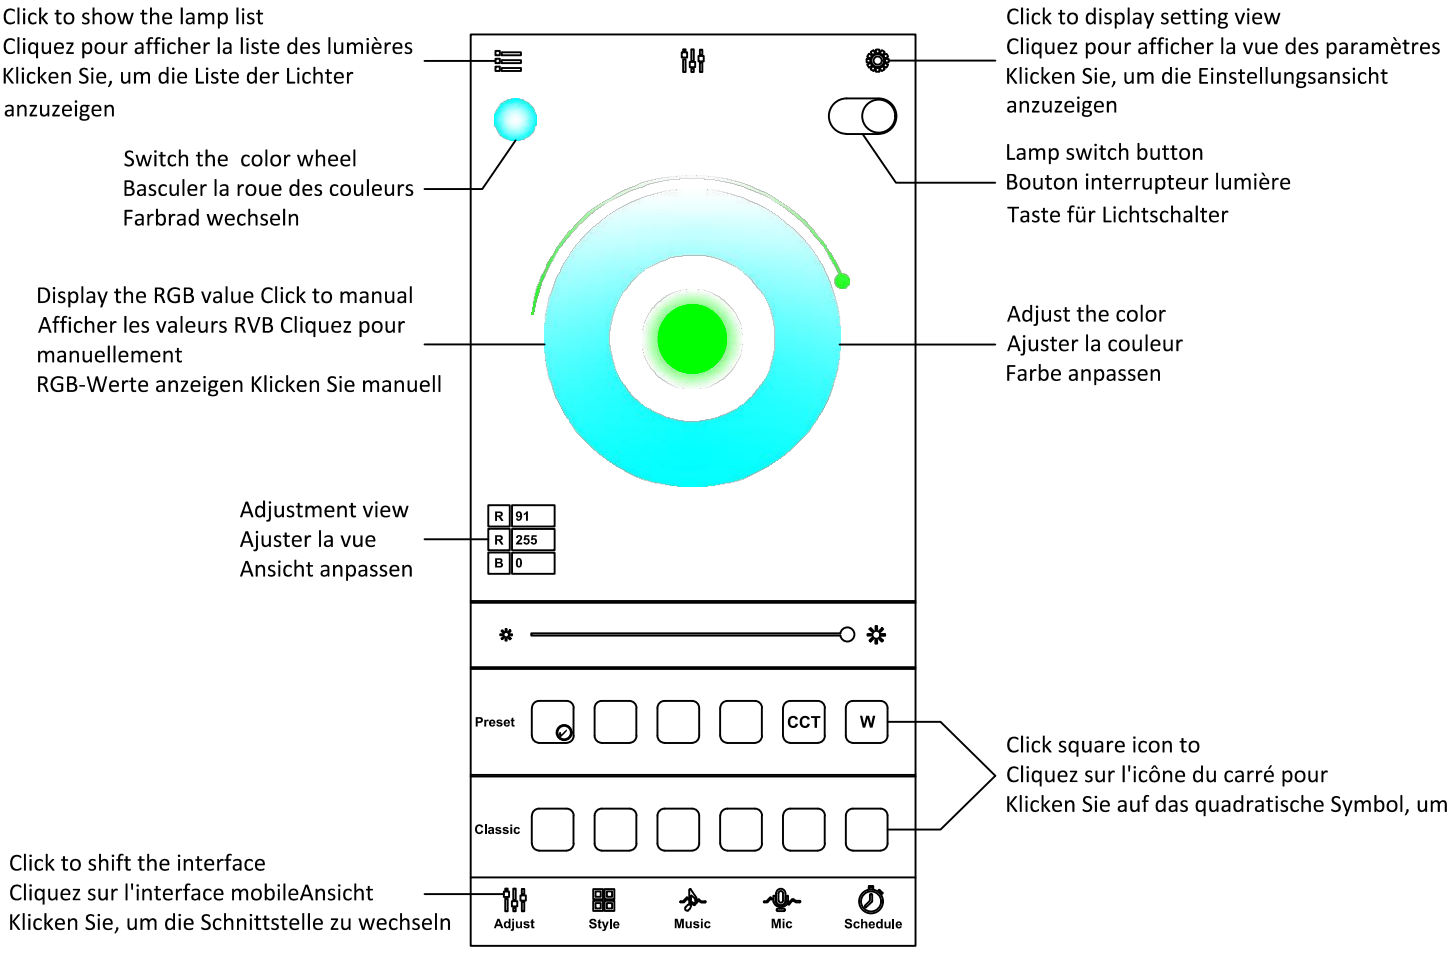


LED Bluetooth controller Features
Caractéristiques du contrôleur Bluetooth LED
LED Bluetooth Controller Eigenschaften

Product Features :
LED Bluetooth controller is directly via mobile phone control remote distance can reach 20m without the need to set up,easy to connect open the software within 5 seconds you can automatically connect the controller ·Flow the rhythm of the music changes ·Group control ·Brightness,speed addition and subtraction ·Maximum can be 10 meters RGB(W)strip ·The software shows that the text is based on the language of the mobile phone set up automatic transformation of Chinese and English Animation Effect: ·Colorful gradient ● All kinds of monchrome,double color gradient ● All kinds of monochrome,double color, colorfull flashing Follow the thythm of the music chagnes Product Paramters: ·Bluetooth:BLE V4.2 ·Input Voltage:4.5~26V ·Working Temp:-25~75℃ · Size:43*22*11mm ·Weight:30g ·Max Power:144W(24V)

Caractéristiques du produit:
Le contrôleur Bluetooth LED est contrôlé directement via le téléphone portable La distance à distance peut atteindre 20m Aucun réglage requis, connexion facile Ouvrez le logiciel pour se connecter automatiquement au contrôleur dans les 5 secondes · Changement de rythme de la musique fluide · Contrôle de groupe · Luminosité, augmentation et diminution de vitesse · Jusqu'à 10 mètres barres RVB (W) · Le logiciel affiche le texte Convertir automatiquement les effets d'animation chinois et anglais selon les paramètres de langue du téléphone portable: · Dégradé coloré ● Divers dégradés monochrome et bicolore ● Divers clignotements monochrome, bicolore et colorés suivent le rythme de la musique chagnes Paramètres du produit: · Bluetooth: BLE V4.2 · Tension d'entrée: 4,5 ~ 26 V · Température de fonctionnement: -25 ~ 75 ℃ · Taille: 43 * 22 * 11 mm · Poids: 30 g · Puissance maximale: 144 W (24 V)

Produktmerkmale:
Der LED-Bluetooth-Controller wird direkt über das Mobiltelefon gesteuert. Die Fernentfernung kann bis zu 20 m erreichen. Keine Einstellung erforderlich, einfach zu verbinden. Öffnen Sie die Software, um den Controller automatisch innerhalb von 5 Sekunden zu verbinden · Rhythmusänderungen der fließenden Musik · Gruppensteuerung · Helligkeit, Geschwindigkeitserhöhung und -verringerung · Maximal 10 Meter RGB(W)-Streifen · Software zeigt Text, um den Animationseffekt zwischen Chinesisch und Englisch entsprechend den Spracheinstellungen des Mobiltelefons automatisch umzuwandeln: · Bunter Farbverlauf ● Verschiedene einfarbige und zweifarbige Farbverläufe ● Verschiedene einfarbige, zweifarbige und farbenfrohe Blinkungen folgen dem Rhythmus der Musik chagnes Produktparameter: · Bluetooth: BLE V4.2 · Eingangsspannung: 4,5 ~ 26 V · Betriebstemperatur: -25 ~ 75 ℃ · Größe: 43 * 22 * 11 mm · Gewicht: 30 g · Maximale Leistung: 144 W (24 V)

Question: What to do if the slat frame is tilted?

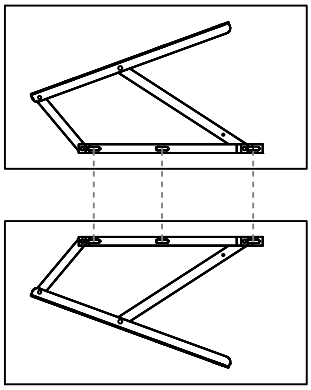


Answer:

The hole on the hydraulic rod is oval. Please make sure that the installation positions on the left and right sides are the same. If you accidentally install one side of the hydraulic rod in the front and the other side in the back, the slat frame will be crooked and you will need to disassemble it and reinstall it.

Die Bohrung an der Hydraulikstange ist oval. Achten Sie darauf, dass die Montagepositionen links und rechts identisch sind. Sollten Sie die Hydraulikstange versehentlich auf einer Seite nach vorne und auf der anderen nach hinten montieren, gerät der Lattenrahmen schräg. In diesem Fall müssen Sie alles demontieren und neu installieren.

Le trou de fixation de la tige hydraulique est ovale. Veillez à ce que les positions de montage soient identiques à gauche et à droite. Si vous installez par erreur la tige hydraulique vers l'avant d'un côté et vers l'arrière de l'autre, le cadre à lattes sera incliné. Il faudra alors le démonter puis le remonter correctement.

Question:What to do if the hydraulic system fails to press down?

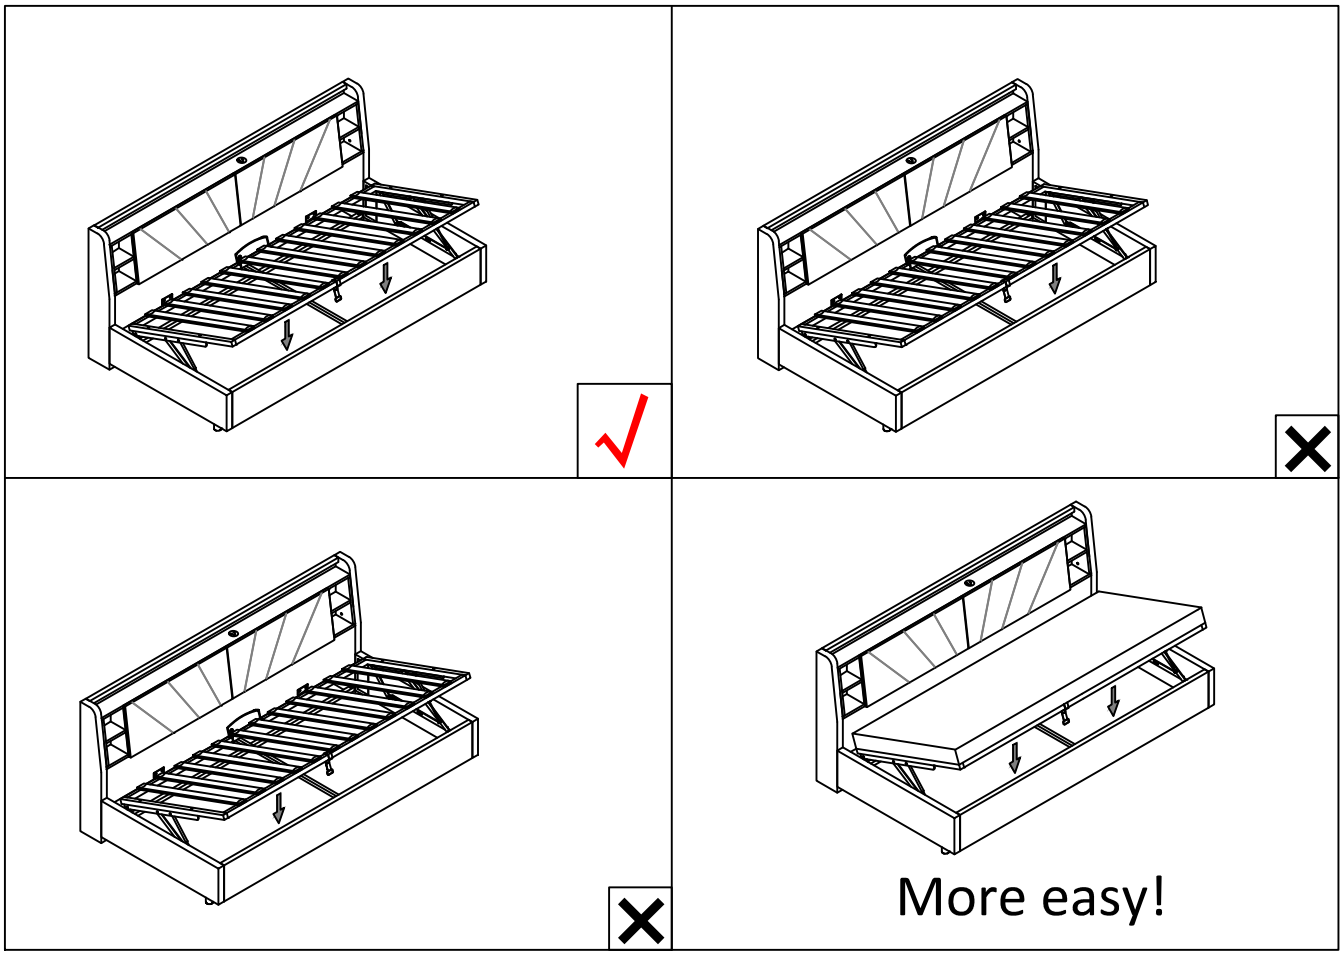

Answer:

When turning off the hydraulic pressure, make sure that the pressure point is at the position indicated by the arrow. Place your hand at the pressure point.If you place the mattress on a slatted frame, it will be easier to turn off the hydraulic pressure. Please try it.
Do not press only on the left side or only on the right side, as this will damage the hydraulic system.

Beim Entlasten der Hydraulik muss der Druckpunkt mit der durch den Pfeil markierten Position übereinstimmen. Legen Sie Ihre Hand auf diesen Druckpunkt.Wenn Sie eine Matratze auf den Lattenrahmen legen, lässt sich die Hydraulik leichter entlasten – probieren Sie diesen Tipp aus.
Drücken Sie niemals nur auf die linke oder nur auf die rechte Seite, da sonst die Hydraulikanlage beschädigt wird.

Lors du relâchement du système hydraulique, assurez-vous que le point d'appui coïncide avec l'emplacement indiqué par la flèche et posez la main sur ce point.Poser le matelas sur le cadre à lattes facilite le relâchement de la pression hydraulique, vous pouvez essayer cette méthode.
Ne pas exercer de pression uniquement sur le côté gauche ou uniquement sur le côté droit, cela endommagerait le système hydraulique.

Verification of compliance Verification of compliance Verification of compliance

Verification of Compliance

Verification No.:	MK24070005P01-C01
Name and address of Applicant:	**Shenzhen Aoli Optoelectronics Co., Ltd** 5th Floor, Building 3, Haitian Lanyu Science and Technology Park, Shilong Community, Shiyan Street, Bao'an District, Shenzhen
Name and address of Manufacturer:	**Shenzhen Aoli Optoelectronics Co., Ltd** 5th Floor, Building 3, Haitian Lanyu Science and Technology Park, Shilong Community, Shiyan Street, Bao'an District, Shenzhen
Product name:	**Embedded USB port**
Product model(s):	12vA+c, 5vA+c
Product trademark:	N/A

This verification confirms that the product meets the requirements of the following standard.
The conformity was demonstrated based on following standard(s) listed by European Commission as harmonized with Directive RoHS 2.0 Directive (EU) 2015/863 and (EU)2017/2102 amending Annex II to Directive 2011/65/EU

IEC 62321-1:2013	IEC 62321-3-1:2013
IEC 62321-4:2013/AMD1:2017	IEC 62321-5:2013
IEC 62321-6:2015	IEC 62321-7-1:2015
IEC 62321-7-2:2017	IEC 62321-8:2017
IEC 62321-2:2014	

The verification has been carried out in accordance with individual rules and conditions agreed with the applicant. Evaluation has been carried out in accordance with:

Test report(s) No.:	MK24070005P01-C01
Test conducted by:	TMC Testing Services (Shenzhen) Co., Ltd.
Verification issue date:	July 11, 2024

Notes:
This verification refers to the above mentioned product and its conformity in regards of above mentioned standard(s) was proven on test sample.
This verification does not imply meeting all essential requirements, assessment of the series-production or any other restricted Notified Bodies conformity assessment procedure appropriate for the product.
This verification holder shall use this verification in connection to verification of conformity and technical data relevant for the product the verification was issued.

TMC Testing Services (Shenzhen) Co., Ltd.
t:86-755-86642861 cert@tmc-lab.com www.tmc-lab.com
1st Floor, Block A1, Zone A, Xinshidai Gongrong Industrial Park, No. 2, Shihuan Road, Shiyan Street, Baoan District, Shenzhen, China

Bauart geprüft TMC Access to global market Product Safety Type Approved

Lab Vivian Jiang
Vivian Jiang

CE

Verification of Compliance Verification of Compliance Verification of Compliance Verification of Compliance

Verification of Compliance

Verification No.:	MK24070005P01-E01
Name and address of Applicant:	**Shenzhen Aoli Optoelectronics Co., Ltd** 5th Floor, Building 3, Haitian Lanyu Science and Technology Park, Shilong Community, Shiyan Street, Bao'an District, Shenzhen
Name and address of Manufacturer:	**Shenzhen Aoli Optoelectronics Co., Ltd** 5th Floor, Building 3, Haitian Lanyu Science and Technology Park, Shilong Community, Shiyan Street, Bao'an District, Shenzhen
Product name:	**Embedded USB port**
Rated:	Input:12V⎓ Output:5V⎓
Product model(s):	12vA+c, 5vA+c
Product trademark:	N/A

This verification confirms that the product meets the requirements of the following standard.
The conformity was demonstrated based on following standard(s) listed by European Commission as harmonized with EMC Directive 2014/30/EU

EN 55032:2015+A11:2020
EN 55035:2017+A11:2020

The verification has been carried out in accordance with individual rules and conditions agreed with the applicant. Evaluation has been carried out in accordance with:

Test report(s) No.:	MK24070005P01-E01
Test conducted by:	TMC Testing Services (Shenzhen) Co., Ltd.
Verification issue date:	July 11, 2024

Notes:

This verification refers to the above mentioned product and its conformity in regards of above mentioned standard(s) was proven on test sample.

This verification does not imply meeting all essential requirements, assessment of the series-production or any other restricted Notified Bodies conformity assessment procedure appropriate for the product.

This verification holder shall use this verification in connection to verification of conformity and technical data relevant for the product the verification was issued.

TMC Testing Services (Shenzhen) Co., Ltd.
t:86-755-86642861 cert@tmc-lab.com www.tmc-lab.com
1st Floor, Block A1, Zone A, Xinshidai Gongrong Industrial Park, No. 2, Shihuan Road, Shiyan Street, Baoan District, Shenzhen, China

Bauart geprüft TMC Access to global market Product Safety To be approved

Lab: Vivian Jiang

Verification of compliance Verification of compliance Verification of compliance Verification of compliance

Verification of Compliance

Verification No.:	MK23020083-P01C01
Name and address of Applicant:	**Shenzhen Hongzhengyu Technology Co., LTD** Shenzhen baoan district rock street industrial science and technology industrial park of 2 Haitian lanyu 3 5 floor of A
Name and address of Manufacturer:	**Shenzhen Hongzhengyu Technology Co., LTD** Shenzhen baoan district rock street industrial science and technology industrial park of 2 Haitian lanyu 3 5 floor of A
Product name:	**Lamp strip**
Product model(s):	HZY-2835-120D-12V, HZY-2835-30D-5V, HZY-2835-60D-5V, HZY-2835-120D-5V, HZY-2835-60D-12V, HZY-2835-60D-24V, HZY-2835-120D-24V, HZY-2835RGB-60D-5V, HZY-2835RGB-60D-12V, HZY-5050-30D-5V, HZY-5050-60D-5V, HZY-5050-30D-12V, HZY-5050-60D-12V, HZY-5050-60D-24V, HZY-5050RGB-30D-5V, HZY-5050RGB-60D-5V, HZY-5050RGB-30D-12V, HZY-5050RGB-60D-12V, HZY-5050RGB-60D-24V
Product trademark:	N/A

This verification confirms that the product meets the requirements of the following standard.

The conformity was demonstrated based on following standard(s) listed by European Commission as harmonized with Directive RoHS 2.0 Directive (EU) 2015/863 and (EU)2017/2102 amending Annex II to Directive 2011/65/EU

IEC 62321-1:2013	IEC 62321-3-1:2013
IEC 62321-4:2013/AMD1:2017	IEC 62321-5:2013
IEC 62321:6-2015	IEC 62321-7-1:2015
IEC 62321-7-2:2017	IEC 62321-8:2017

The verification has been carried out in accordance with individual rules and conditions agreed with the applicant. Evaluation has been carried out in accordance with:

Test report(s) No.:	MK23020083-P01C01
Test conducted by:	TMC Testing Services (Shenzhen) Co., Ltd.
Verification issue date:	February 25, 2023

Notes:

This verification refers to the above mentioned product and its conformity in regards of above mentioned standard(s) was proven on test sample.

This verification does not imply meeting all essential requirements, assessment of the series-production or any other restricted Notified Bodies conformity assessment procedure appropriate for the product.

This verification holder shall use this verification in connection to verification of conformity and technical data relevant for the product the verification was issued.

TMC Testing Services (Shenzhen) Co., Ltd.

t:86-755-86642861 cert@tmc-lab.com www.tmc-lab.com

1st Floor, Block A1, Zone A, Xinshidai Gongrong Industrial Park, No. 2, Shihuan Road, Shiyan Street, Baoan District, Shenzhen, China

Bauart geprüft TMC Product Safety

Lab Manager: Vivian Jiang

CE

TMC

Verification of compliance Verification of compliance Verification of compliance Verification of compliance

Verification of Compliance

Verification No.:	MK23020083-P01E01
Name and address of Applicant:	**Shenzhen Hongzhengyu Technology Co., LTD** Shenzhen baoan district rock street industrial science and technology industrial park of 2 Haitian lanyu 3 5 floor of A
Name and address of Manufacturer	**Shenzhen Hongzhengyu Technology Co., LTD** Shenzhen baoan district rock street industrial science and technology industrial park of 2 Haitian lanyu 3 5 floor of A
Product name:	**Lamp strip**
Rated:	5V ⎓ 1A
Product model(s):	HZY-2835-120D-12V, HZY-2835-30D-5V, HZY-2835-60D-5V, HZY-2835-120D-5V, HZY-2835-60D-12V, HZY-2835-60D-24V, HZY-2835-120D-24V, HZY-2835RGB-60D-5V, HZY-2835RGB-60D-12V, HZY-5050-30D-5V, HZY-5050-60D-5V, HZY-5050-30D-12V, HZY-5050-60D-12V, HZY-5050-60D-24V, HZY-5050RGB-30D-5V, HZY-5050RGB-60D-5V, HZY-5050RGB-30D-12V, HZY-5050RGB-60D-12V, HZY-5050RGB-60D-24V
Product trademark:	N/A

This verification confirms that the product meets the requirements of the following standard.

The conformity was demonstrated based on following standard(s) listed by European Commission as harmonized with EMC Directive 2014/30/EU.

EN IEC 55015:2019+A11:2020

IEC 61547:2020

The verification has been carried out in accordance with individual rules and conditions agreed with the applicant. Evaluation has been carried out in accordance with:

Test report(s) No.:	MK23020083-P01E01
Test conducted by:	TMC Testing Services (Shenzhen) Co., Ltd.
Verification issue date:	February 25, 2023

Notes:

This verification refers to the above mentioned product and its conformity in regards of above mentioned standard(s) was proven on test sample.

This verification does not imply meeting all essential requirements, assessment of the series-production or any other restricted Notified Bodies conformity assessment procedure appropriate for the product.

This verification holder shall use this verification in connection to verification of conformity and technical data relevant for the product the verification was issued.

TMC Testing Services (Shenzhen) Co., Ltd.

t:86-755-86642861 cert@tmc-lab.com www.tmc-lab.com

1st Floor, Block A1, Zone A, Xinshidai Gongrong Industrial Park, No. 2, Shihuan Road, Shiyan Street, Baoan District, Shenzhen, China

Bauart geprüft TMC Access to global market Product Safety

Lab

Vivian Jiang

Verification of compliance Verification of compliance Verification of compliance

Verification of Compliance

Verification No.:	MK24030235P01-S01
Name and address of Applicant:	**Shenzhen Hongzhengyu Technology Co., LTD** Shenzhen baoan district rock street industrial science and technology industrial park of 2 Haitian lanyu 3 5 floor of A
Name and address of Manufacturer:	**Shenzhen Hongzhengyu Technology Co., LTD** Shenzhen baoan district rock street industrial science and technology industrial park of 2 Haitian lanyu 3 5 floor of A
Product name:	**LED Lamp Strip**
Rated：	DC5V, 2A, Max.10W
Product model(s):	HZY-2835-120D-12V, HZY-2835-30D-5V, HZY-2835-60D-5V, HZY-2835-120D-5V, HZY-2835-60D-12V, HZY-2835-60D-24V, HZY-2835-120D-24V, HZY-2835RGB-60D-5V, HZY-2835RGB-60D-12V, HZY-5050-30D-5V, HZY-5050-60D-5V, HZY-5050-30D-12V, HZY-5050-60D-12V, HZY-5050-60D-24V, HZY-5050RGB-30D-5V, HZY-5050RGB-60D-5V, HZY-5050RGB-30D-12V,HZY-5050RGB-60D-12V, HZY-5050RGB-60D-24V
Product trademark:	N/A

This verification confirms that the product meets the requirements of the following standard.
The conformity was demonstrated based on following standard(s) listed by European Commission as harmonized with LVD Directive 2014/35/EU.

EN IEC 60598-2-1:2021;
EN IEC 60598-1:2021+ A11:2022

The verification has been carried out in accordance with individual rules and conditions agreed with the applicant. Evaluation has been carried out in accordance with:

Test report(s) No.:	MK24030235P01-S01
Test conducted by:	TMC Testing Services (Shenzhen) Co., Ltd.
Verification issue date:	April 9, 2024

Notes:

This verification refers to the above mentioned product and its conformity in regards of above mentioned standard(s) was proven on test sample.

This verification does not imply meeting all essential requirements, assessment of the series-production or any other restricted Notified Bodies conformity assessment procedure appropriate for the product.

This verification holder shall use this verification in connection to Verification of Compliance and technical data relevant for the product the verification was issued.

TMC Testing Services (Shenzhen) Co., Ltd.
t:86-755-86642861 cert@tmc-lab.com www.tmc-lab.com
1/F., Block A, Xinshidai Gongrong Industrial Park, No. 2, Shihuan Road, Shilong Community, Shiyan Street, Baoan District, Shenzhen, China

Dawen Xu

Lab Director
Dawen Xu

Bauart geprüft TMC Product Safety Type approved

CE

Certificate – Сертификат – 證明書 – Certificat – 증명서 – شهادة

Shenzhen ZKT Technology Co., Ltd.
1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue,
Fuhai Street, Bao'an District, Shenzhen, China

Certificate of Compliance

Certificate Number: ZKT-25070215182C

Certificate's Holder	:	**Dongguan Yihong Hardware Electronics Co., Ltd Room 1106, No.2, Shangheng Road, Chang'an Town, Dongguan**
Manufacturer	:	**Dongguan Yihong Hardware Electronics Co., Ltd Room 1106, No.2, Shangheng Road, Chang'an Town, Dongguan**
Trade Mark	:	**N/A**
Product	:	**LED controller**
Model(s)	:	**YH-6183 YH-252, YH-284, YH-290, YH-287, YH-358, YH-360, YH-6180, YH-6184**

Requirement	Standard	Report No.
Art.3.1(a) Safety	EN IEC 62368-1:2024+A11:2024	ZKT-25070215183S
Art.3.1(a) Health	EN IEC 62311:2020 EN 50665:2017	ZKT-25070215182E-1
Art.3.1(b) EMC	ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN 301 489-17 V3.3.0 (2024-07)	ZKT-25070215182E-2
Art.3.2 Radio	ETSI EN 300 328 V2.2.2 (2019-07)	ZKT-25070215182E-3

This Attestation of Compliance is issued on a voluntary basis for electrical equipment below the voltage limits of Radio Equipment Directive (RED) 2014/53/EU. The essential requirement are fulfilled accordingly based on the technical specifications applicable at the time of issuance.

CE

Shenzhen ZKT Technology Co., Ltd.
APPROVED
Manager
Jul. 07, 2025

This Certificate of Conformity is based on single evaluation of the submitted sample(s) of the above mentioned product. It does not imply an assessment of the whole product and relevant . Directives to be observed.

精准检测
PRECISE TESTING

CERTIFICATE OF CONFORMITY

No.: PTC25102309602C-EN01V01

Applicant	:	**Dongguan Yihong Hardware electronics Co., LTD**
Address	:	**Room 901, No. 2, Shangheng Road, Chang'an Town, Dongguan City, Guangdong Province, 523880 China**
Manufacturer	:	**Dongguan Yihong Hardware electronics Co., LTD**
Address	:	**Room 901, No. 2, Shangheng Road, Chang'an Town, Dongguan City, Guangdong Province, 523880 China**
Product Name	:	**LED Controler**
Model No.	:	**YH-289,YH-980 ,YH-918 ,YH-917 ,YH-818,YH-816,YH-6181,YH-358**

The submitted sample of the above equipment has been tested and found to comply with the following European Directive:

RoHS Directive 2011/65/EU & EU No.2015/863

The standard(s) used for showing compliance with the essential requirements:

Applicable Standard(s)	Test Report(s) Number
IEC 62321-1:2013, IEC 62321-2:2021 IEC 62321-3-1:2013, IEC 62321-3-2:2020 IEC62321-4: 2013+AMD1:2017 IEC 62321-5:2013 IEC 62321-6:2015, IEC 62321-7-1: 2015 IEC 62321-7-2: 2017, IEC 62321-8:2017	**PTC25102309602C-EN01V01**

This certificate is part of the full test report(s) and should be read in conjunction with it. This certificate is based on an evaluation of one sample of above mentioned product. It does not imply assessment of the production of the product. Without the written approval of Precise Testing & Certification (Guangdong) Co., Ltd., this certificate is not permitted to be reproduced, except in full. It is not permitted to use the test lab's logo.

RoHS

PRECISE TESTING & CERTIFICATION (GUANGDONG) CO., LTD.

Jacky Ou
Manager
Date:Dec. 04, 2025

Precise Testing & Certification (Guangdong) Co., Ltd.
Building 1, No.6, Tongxin Road, Dongcheng Street,
Dongguan, Guangdong, China
Tel: 86 769 38808222 Web:www.ptc-testing.com
Mail: inquiry@ptc-testing.com

CERTIFICATE OF CONFORMITY

Electromagnetic Compatibility (EMC) Directive 2014/30/EU

This Certificate of Conformity is hereby issued to the product designated below:

Certificate No.....:	24EP04058E01
Report No.....:	EP2404058E01
Date Issue.....:	2024-06-03
Applicant's name.....:	Guangdong Sangu Technology Co., Ltd
Address.....:	402, Chuangye building, 8-28, Shaqi community Central Road, Xinqiao street, Bao'an District, Shenzhen.
Manufacturer's name.....:	Guangdong Sangu Technology Co., Ltd
Address.....:	402, Chuangye building, 8-28, Shaqi community Central Road, Xinqiao street, Bao'an District, Shenzhen.
Product Description .....:	POWER ADAPTER
Model(s)/Type References :	SG-XXXYYYY24Z, GAT-XXXYYYY24Z, SG-XXXYYYY24LZ, GAT-XXXYYYY24LZ,SG-XXXYYYY24BZ, GAT-XXXYYYY24BZ, SG-XXXYYYY24AZ, GAT-XXXYYYY24AZ (for definition of variables XXX, YYYY, Z see table A for details)
Parameters .....:	Input: 100-240V~ or 180-240V~, 50/60Hz, 0.6A MAX Output: See Table B for details
Standard(s).....:	EN IEC 55014-1:2021 EN IEC 55014-2:2021 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A1:2019+A2:2021

On the basis of the referenced test report(s), sample(s) tested of the above product have been found to comply with the standards harmonized with the directives listed on this verification at the time the tests were carried out. Other standards and Directives may be relevant to the product. This verification is part of the full test report(s) and should be read in conjunction with it(them).

Once compliance with all product relevant CE mark directives are verified, including any relevant e.g. risk assessment and production control, the manufacturer may indicate compliance by signing a Declaration of Conformity themselves and applying the mark to products identical to the tested sample(s).

Approved By

.....

Eric Liu

Director of engineering department

Dongguan Pubiao Testing Technology Co., Ltd
No. 3, 1/F., Building A, No.30, Minghua Road, Juzhou, Shijie, Dongguan, Guangdong, China
Tel: +86 769 81813516 E-mail: service@pubiaotest.com Web: www.pubiaotest.com

CERTIFICATE OF CONFORMITY

Electromagnetic Compatibility (EMC) Directive 2014/30/EU

Appendix of Certificate No.: 24EP04058E01

Table A: Definition of variables

Variable	Range of variable	Content
XXX	050-480	3 digit numbers which represents output voltage in V after diving by 10. For example, 050=5.0Vdc, 480=48.0Vdc. The rated output voltage is rising in steps of 0.1V
YYYY	0100-3000	4 digit numbers which represents output current in A after diving by 1000. For example, 0100=0.1A, 3000=3.0A. The rated output current is rising in steps of 0.01A
Z	E, B	One capital letter representing the plug type for different countries: “E” denotes European plug; “B” denotes Britain plug.

Table B: Model list and output rating

Model	Output voltage (Vdc)	Output current (A)	Max Power (W)	Transformer
SG-XXXYYYY24Z GAT-XXXYYYY24Z SG-XXXYYYY24LZ GAT-XXXYYYY24LZ SG-XXXYYYY24BZ GAT-XXXYYYY24BZ SG-XXXYYYY24AZ GAT-XXXYYYY24AZ	5.0	0.1-3.0	15.0	EE17
	5.1-5.5	0.1-3.0	16.5	
	5.6-6.0	0.1-2.9	16.5	
	6.1-7.4	0.1-2.5	18.5	
	7.5-9.0	0.1-2.2	19.8	
	9.1-12.0	0.1-2.0	24.0	
	12.1-24.0	0.1-1.98	24.0	EE17-1
	24.1-48.0	0.1-1.0	24.0	EE17-2

Remark:

1) The rated output voltage is rising from 5.0V and in steps of 0.1V.
2) The rated output current is rising from 0.1A and in steps of 0.01A, but not more than the indicated max o/p current.
3) Actual output current depends on range of output voltage. The max. Output current multiplied by output voltage cannot exceed the max. Output power.

Dongguan Pubiao Testing Technology Co., Ltd
No. 3, 1/F., Building A, No.30, Minghua Road, Juzhou, Shijie, Dongguan, Guangdong, China
Tel: +86 769 81813516 E-mail: service@pubiaotest.com Web: www.pubiaotest.com

RoHS

CERTIFICATE OF CONFORMITY

RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU

This Certificate of Conformity is hereby issued to the product designated below:

Certificate No. :	23CP12248R01
Report No. :	CP2312248R01
Date Issue. :	2024-04-29
Applicant's name :	Guangdong Sangu Technology Co., Ltd
Address :	402, Chuangye building, 8-28, Shaqi community Central Road, Xinqiao street, Bao'an District, Shenzhen.
Manufacturer's name :	Guangdong Sangu Technology Co., Ltd
Address :	402, Chuangye building, 8-28, Shaqi community Central Road, Xinqiao street, Bao'an District, Shenzhen.
Product Description :	POWER ADAPTER
Model(s)/Type References :	SG-XXXYYYY24Z, GAT-XXXYYYY24Z, SG-XXXYYYY24LZ, GAT-XXXYYYY24LZ,SG-XXXYYYY24BZ, GAT-XXXYYYY24BZ, SG-XXXYYYY24AZ, GAT-XXXYYYY24AZ (XXX, YYYY, Z are variables, details see table A for details)
Conclusion:	Based on the performed tests on submitted sample(s), the results of Lead, Mercury, Cadmium, Hexavalent chromium, Polybrominated biphenyls (PBBs), Polybrominated diphenyl ethers (PBDEs) and Phthalates such as Bis(2-ethylhexyl) phthalate (DEHP) , Butyl benzyl phthalate (BBP), Dibutyl phthalate (DBP) , and Diisobutyl phthalate (DIBP) comply with the limits as set by RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU.
Standard(s) :	IEC 62321-4:2013+A1:2017 IEC 62321-5:2013 IEC 62321-7-1:2015 IEC 62321-7-2:2017 IEC 62321-6:2015 IEC 62321-8:2017

On the basis of the referenced test report(s), sample(s) tested of the above product have been found to comply with the standards harmonized with the directives listed on this verification at the time the tests were carried out. Other standards and Directives may be relevant to the product. This verification is part of the full test report(s) and should be read in conjunction with it(them).

Once compliance with all product relevant CE mark directives are verified, including any relevant e.g. risk assessment and production control, the manufacturer may indicate compliance by signing a Declaration of Conformity themselves and applying the mark to products identical to the tested sample(s).

Approved By Eric Liu

Director of engineering department

Dongguan Pubiao Testing Technology Co., Ltd.
No. 3, 1/F., Building A, No.30, Minghua Road, Juzhou, Shijie, Dongguan, Guangdong, China.
Tel: +86 769 81813516 E-mail: service@pubiaotest.com Web: www.pubiaotest.com

RoHS

CERTIFICATE OF CONFORMITY

RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU

Appendix of Certificate No.: 23CP12248R01

Table A: Definition of variables

Variable	Range of variable	Content
XXX	050-480	3 digit numbers which represents output voltage in V after diving by 10. For example, 050=5.0Vdc, 480=48.0Vdc. The rated output voltage is rising in steps of 0.1V
YYYY	0100-3000	4 digit numbers which represents output current in A after diving by 100. For example, 0100=0.1A, 3000=3.0A. The rated output current is rising in steps of 0.01A
Z	E, B	One capital letter representing the plug type for different countries: "E" denotes European plug; "B" denotes Britain plug.

Table B: Model list and output rating

Model	Input	Output voltage (Vdc)	Output current (A)	Max Power (W)	Transformer
SG-XXXYYYY24Z GAT-XXXYYYY24Z SG-XXXYYYY24LZ GAT-XXXYYYY24LZ SG-XXXYYYY24BZ GAT-XXXYYYY24BZ SG-XXXYYYY24AZ GAT-XXXYYYY24AZ	100-240V~ or 180-240V~, 50/60Hz, 0.6A MAX	5.0	0.1-3.0	15.0	EE17
		5.1-5.5	0.1-3.0	16.5	
		5.6-6.0	0.1-2.9	16.5	
		6.1-7.4	0.1-2.5	18.5	
		7.5-9.0	0.1-2.2	19.8	
		9.1-12.0	0.1-2.0	24.0	
		12.1-24.0	0.1-1.98	24.0	EE17-1
		24.1-48.0	0.1-1.0	24.0	EE17-2

DongGuan PuBiao Testing Technology Co., Ltd * CERTIFICATE *

Dongguan Pubiao Testing Technology Co., Ltd
No. 3, 1/F., Building A, No.30, Minghua Road, Juzhou, Shijie, Dongguan, Guangdong, China.
Tel: +86 769 81813516 E-mail: service@pubiaotest.com Web: www.pubiaotest.com

CE

CERTIFICATE OF CONFORMITY

Low Voltage Directive 2014/35/EU

This Certificate of Conformity is hereby issued to the product designated below:

Certificate No. ..... :	24SP04058L01
Report No. ..... :	SP2404058L01
Date Issue. ..... :	2024-06-01
Applicant's name ..... :	Guangdong Sangu Technology Co., Ltd
Address ..... :	402, Chuangye building, 8-28, Shaqi community Central Road, Xinqiao street, Bao'an District, Shenzhen.
Manufacturer's name ..... :	Guangdong Sangu Technology Co., Ltd
Address ..... :	402, Chuangye building, 8-28, Shaqi community Central Road, Xinqiao street, Bao'an District, Shenzhen.
Product Description ..... :	POWER ADAPTER
Model(s)/Type References :	SG-XXXYYYY24Z, GAT-XXXYYYY24Z, SG-XXXYYYY24LZ, GAT-XXXYYYY24LZ,SG-XXXYYYY24BZ, GAT-XXXYYYY24BZ, SG-XXXYYYY24AZ, GAT-XXXYYYY24AZ (for definition of variables XXX, YYYY, Z see table A for details)
Parameters ..... :	Input: 100-240V~ or 180-240V~, 50/60Hz, 0.6A MAX Output: See table B for details
Standard(s) ..... :	EN 61558-2-16:2009/ A1:2013 used in conjunction with EN IEC 61558-1:2019

On the basis of the referenced test report(s), sample(s) tested of the above product have been found to comply with the standards harmonized with the directives listed on this verification at the time the tests were carried out. Other standards and Directives may be relevant to the product. This verification is part of the full test report(s) and should be read in conjunction with it(them).

Once compliance with all product relevant CE mark directives are verified, including any relevant e.g. risk assessment and production control, the manufacturer may indicate compliance by signing a Declaration of Conformity themselves and applying the mark to products identical to the tested sample(s).

Approved By

.....

Eric Liu

Director of engineering department

DongGuan PuBiao Testing Technology Co., Ltd. * CERTIFICATE *

Dongguan Pubiao Testing Technology Co., Ltd
No. 3, 1/F., Building A, No.30, Minghua Road, Juzhou, Shijie, Dongguan, Guangdong, China.
Tel: +86 769 81813516 E-mail: service@pubiaotest.com Web: www.pubiaotest.com

CE

CERTIFICATE OF CONFORMITY

Low Voltage Directive 2014/35/EU

Appendix of Certificate No.: 24SP04058L01

Table A: Definition of variables

Variable	Range of variable	Content
XXX	050-480	3 digit numbers which represents output voltage in V after diving by 10. For example, 050=5.0Vdc, 480=48.0Vdc. The rated output voltage is rising in steps of 0.1V
YYYY	0100-3000	4 digit numbers which represents output current in A after diving by 1000. For example, 0100=0.1A, 3000=3.0A. The rated output current is rising in steps of 0.01A
Z	E, B	One capital letter representing the plug type for different countries: "E" denotes European plug; "B" denotes Britain plug.

Table B: Model list and output rating

Model	Output voltage (Vdc)	Output current (A)	Max Power (W)	Transformer
SG-XXXYYYY24Z GAT-XXXYYYY24Z SG-XXXYYYY24LZ GAT-XXXYYYY24LZ SG-XXXYYYY24BZ GAT-XXXYYYY24BZ SG-XXXYYYY24AZ GAT-XXXYYYY24AZ	5.0	0.1-3.0	15.0	EE17
	5.1-5.5	0.1-3.0	16.5	
	5.6-6.0	0.1-2.9	16.5	
	6.1-7.4	0.1-2.5	18.5	
	7.5-9.0	0.1-2.2	19.8	
	9.1-12.0	0.1-2.0	24.0	
	12.1-24.0	0.1-1.98	24.0	EE17-1
	24.1-48.0	0.1-1.0	24.0	EE17-2

DongGuan PuBiao Testing Technology Co., Ltd * CERTIFICATE *

DongGuan PuBiao Testing Technology Co., Ltd
No. 3, 1/F., Building A, No.30, Minghua Road, Juzhou, Shijie, Dongguan, Guangdong, China.
Tel: +86 769 81813516 E-mail: service@pubiaotest.com Web: www.pubiaotest.com

Importeur	Decobus Handel GmbH
Adresse	Innungsstraße 9, 21244 Buchholz,Deutschland
Email/URL	https://www.decobusgroup.de
Hersteller	Shenzhen Hongzhengyu Technology Co., LTD
Adresse	Floor 5, Building A, Haitian Lanyu No.3, No.2 Industrial Science and Technology Industrial Park, Shiyan street, Bao 'an District, Shenzhen
Email/URL	https://aoligd.1688.com/
Partienummer	HZY-5050RGB-30D-12V
Hergestellt in	China
EC REP	Decobus Handel GmbH Innungsstraße 9, 21244 Buchholz,Deutschland www.decobusgroup.de

Product Name:LED light strip
Model:HZY-5050RGB-30D-12V
Rated voltage:DC12V
Rated frequency:50-60HZ
Power:5W/M

Importeur	Decobus Handel GmbH
Adresse	Innungsstraße 9, 21244 Buchholz,Deutschland
Email/URL	https://www.decobusgroup.de
Hersteller	Dongguan Yihong Hardware electronics Co.,Ltd
Adresse	Room 1106,No.2 Shangheng Road, Chang'an Town Dongguan,Guangdong,China
Email/URL	https://262762219@qq.com
Partienummer	YH-358
Hergestellt in	China
EC REP	Decobus Handel GmbH Innungsstraße 9, 21244 Buchholz,Deutschland www.decobusgroup.de

Product Name:LED controller
Model:YH-358
Rated voltage:DC5-24V
Rated frequency:50-60HZ
Power:10W



Importeur	Decobus Handel GmbH
Adresse	Innungsstraße 9, 2124Buchholz,Deutschland
Email/URL	https://www.decobusgroup.de
Hersteller	Shenzhen Aoli Optoelectronics Co.,LTD
Adresse	5th Floor, Building 3, Haitian Lanyu Science and Technology Park, Shilong Community, Shiyan Street, Bao'an District, Shenzhen
Email/URL	https://aoligd.1688.com/
Partienummer	12V A+C
Hergestellt in	China
EC REP	Decobus Handel GmbH Innungsstraße 9,21244Buchholz,Deutschland www.decobusgroup.de

Product Name:Embedded USB port
Model: 12V A+C
Rated voltage:DC12V
Rated frequency:50-60HZ
Power:10W

Importeur	Decobus Handel GmbH
Adresse	Innungsstraße 9, 21244 Buchholz,Deutschland
Email/URL	https://www.decobusgroup.de
Hersteller	Guangdong sangu Technology Co., LTD
Adresse	402 Chuangye building,8-28,Shaqi community Central Road,Xinqiao street Bao'an District,Shenzhen
Email/URL	https://aoligd.1688.com/
Partienummer	SG 120200024AE
Hergestellt in	China
EC REP	Decobus Handel GmbH Innungsstraße 9, 21244 Buchholz,Deutschland www.decobusgroup.de

Product Name:Power Adapter
Model:SG 120200024AE
Rated voltage:DC12V
Rated frequency:50-60HZ
Power:24W

