

MONTAGEANLEITUNG/ASSEMBLY INSTRUCTIONS

Artikelnummer/Item Number

N622P527578S



N622P527579S

N622P527580S

Unser Bett wird in 3 Paketen geliefert. Die Lieferzeit dieser 3 Pakete können abweichen. bittehaben Sie etwas Geduld und vielen Dank furlhr Verstandnis.

Our bed will be sent to you in 3 packages. The delivery time of these 3 parcels may be different. Please be patient. Thank you for your understanding.

Etagenbett 200x120 cm

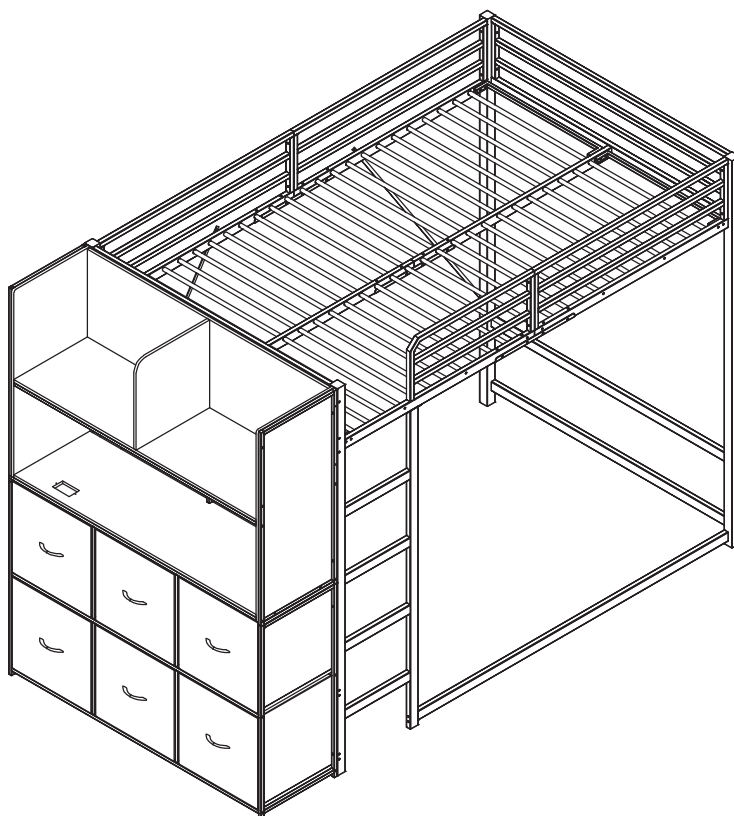

English

IMPORTANT ! KEEP FOR FUTURE REFERENCE : READ CAREFULLY

- To be assembled by an adult. Assembly must be checked by an adult before use
- WARNING ! Keep all screws, small parts and plastic bags out of the reach of children
- Properly identify all parts before assembling
- Never use your item if any of its parts are broken or missing
- Should any problems arise, please contact our After Sales Service
- Manufacturer's instructions shall be followed at all times
- Care: Clean with a soft, dry cloth. In case of larger stains, carefully rub with a slightly damp, non-abrasive sponge
- Avoid the risk of fire by not placing furniture near sources of ignition or hot items
- Do not jump on the bed

Deutsch

WICHTIG ! ZUM SPÄTEREN NACHSCHLAGEN AUFBEWAHREN: SORGFÄLTIG LESEN

- Muss von einem Erwachsenen zusammengebaut werden. Der Zusammenbau muss vor dem Gebrauch von einem Erwachsenen überprüft werden
- WARNUNG! Bewahren Sie alle Schrauben, Kleinteile und Plastikbeutel außerhalb der Reichweite von Kindern auf
- Kennzeichnen Sie vor dem Zusammenbau alle Teile richtig
- Benutzen Sie Ihren Artikel niemals, wenn Teile gebrochen sind oder fehlen
- Sollten Probleme auftreten, wenden Sie sich bitte an unseren Kundendienst
- Die Anweisungen des Herstellers sind stets zu befolgen
- Pflege: Mit einem weichen, trockenen Tuch reinigen. Bei größeren Flecken vorsichtig mit einem leicht feuchten, nicht scheuernden Schwamm abreiben. nicht scheuernden Schwamm
- Vermeiden Sie die Gefahr eines Brandes, indem Sie die Möbel nicht in der Nähe von Zündquellen oder heißen Gegenständen aufstellen
- Nicht auf das Bett springen

Français

IMPORTANT ! CONSERVER POUR RÉFÉRENCE ULTÉRIEURE : LIRE ATTENTIVEMENT

- Le montage doit être effectué par un adulte. Le montage doit être vérifié par un adulte avant Utilisation
- ATTENTION ! Tenir les vis, les petites pièces et les sachets en plastique hors de portée des enfants
- Identifiez correctement toutes les pièces avant de les assembler
- N'utilisez jamais votre article si l'une de ses pièces est cassée ou manquante
- En cas de problème, veuillez contacter notre service après-vente
- Les instructions du fabricant doivent être respectées à tout moment
- Entretien : nettoyer avec un chiffon doux et sec. En cas de taches plus importantes, frotter soigneusement avec une éponge non abrasive légèrement humide. légèrement humide et non Abrasive
- Évitez les risques d'incendie en ne plaçant pas les meubles à proximité de sources d'inflammation ou d'objets chauds
- Ne pas sauter sur le lit

Italiano



IMPORTANTE! CONSERVARE PER RIFERIMENTO FUTURO: LEGGERE ATTENTAMENTE

- Deve essere assemblato da un adulto. L'assemblaggio deve essere controllato da un adulto prima dell'uso
- ATTENZIONE! Tenere tutte le viti, le piccole parti e i sacchetti di plastica fuori dalla portata dei bambini
- Identificare correttamente tutte le parti prima dell'assemblaggio
- Non utilizzare mai l'articolo se alcune parti sono rotte o mancanti
- In caso di problemi, si prega di contattare il nostro Servizio Post Vendita
- Le istruzioni del produttore devono essere sempre seguite
- Cura: Pulire con un panno morbido e asciutto. In caso di macchie più estese, strofinare accuratamente con una spugna leggermente umida e nonspugna leggermente umida e non abrasiva
- Evitare il rischio di incendio, non collocando i mobili vicino a fonti di accensione o a oggetti caldi
- Non saltare sul letto

Español

¡ IMPORTANTE ! CONSERVELO PARA FUTURAS CONSULTAS: LEA ATENTAMENTE

- Debe ser montado por un adulto. El montaje debe ser comprobado por un adulto antes del uso
- ADVERTENCIA Mantenga todos los tornillos, piezas pequeñas y bolsas de plástico fuera del alcance de los niños.
- Identifique correctamente todas las piezas antes de montarlas
 - Nunca utilice su artículo si alguna de sus piezas está rota o falta
 - Si surge algún problema, póngase en contacto con nuestro Servicio Postventa
 - Las instrucciones del fabricante deben seguirse en todo momento
 - Cuidado: Limpiar con un paño suave y seco. En caso de manchas más grandes, frote cuidadosamente con una esponja no abrasiva ligeramente humedecida.
 - Evite el riesgo de incendio no colocando los muebles cerca de fuentes de ignición u objetos calientes.
 - No saltar sobre la cama.

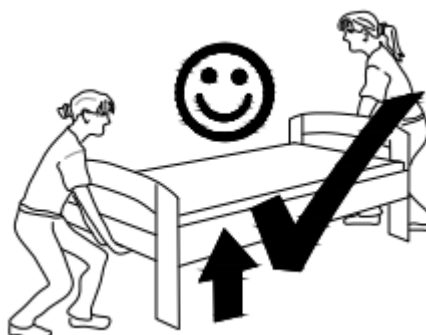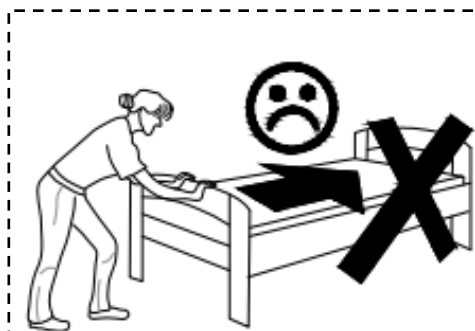

INSTRUCTIONS

IMPORTANT-READ CAREFULLY-RETAIN FOR FUTURE REFERENCE

- a) **WARNING** -Children can become trapped between the bed and the wall, the adjoining pieces of furniture (e.g. cupboards) and the like. To avoid risk of serious injury the distance between the safety barrier and the adjoining structure shall not exceed 90 mm or shall be more than 230 mm.
- b) **WARNING**-Do not use the bed if any structural part is broken or missing; Replacement parts are between requested from the manufacturer or the store.
- c) **WARNING**-Do not climb or wiggle on any non-designated structures.
- d) it is imperative to always follow the installation instructions and manufacturer's use.
- e) **The recommended size of the mattress to be used with the bed is 200cmx120cm, maximum thickness mattress:10cm.**
- f) It is necessary to ventilate the room in order to maintain a low level moisture and prevent mold growth in the bed and its periphery.
- g) Joining devices should always be tightened properly and regularly verified. Tighten if necessary.
- i) **Meets European standard requirements NC safety EN747-1 : 2024**

ANLEITUNGEN

WICHTIG - SORGFÄLTIG LESEN - FÜR SPÄTERE VERWENDUNG

AUFBEWAHREN

- a) **WARNUNG** - Kinder können zwischen dem Bett und der Wand, den angrenzenden Möbelstücken (z. B. Schränken) und der Lücke eingeklemmt werden. Um die Gefahr schwerer Verletzungen zu vermeiden, darf der Abstand zwischen der Sicherheitsbarriere und der angrenzenden Struktur nicht mehr als 90 mm oder mehr als 230 mm betragen.
- b) **WARNUNG**-Das Bett darf nicht benutzt werden, wenn ein Bauteil gebrochen ist oder fehlt; Ersatzteile sind beim Hersteller oder im Geschäft anzufordern.
- c) **WARNUNG** - Klettern oder wackeln Sie nicht auf nicht dafür vorgesehenen Strukturen.
- d) Befolgen Sie unbedingt die Installationsanweisungen und die Gebrauchsanweisungen des Herstellers.
- e) **Die empfohlene Größe der Matratze für das Bett beträgt 200x120cm, maximale Dicke der Matratze: 10cm.**
- f) Es ist notwendig, den Raum zu lüften, um die Feuchtigkeit niedrig zu halten und Schimmelbildung im Bett und seiner Umgebung zu verhindern.
- g) Die Verbindungselemente sollten immer richtig angezogen sein und regelmäßig überprüft werden. Ziehen Sie sie gegebenenfalls nach.
- i) **Erfüllt die Anforderungen der europäischen Norm NC-Sicherheit EN747-1 : 2024**



DE: Vor dem Einbau die Schrauben in die Löcher stecken und festziehen, aber nicht bis 100%, 70% bis 80% anziehen reicht aus. Schließlich, nachdem alle Schrauben installiert sind, ziehen Sie alle Schrauben auf 100 %.


Wenn Sie auf diese Probleme stoßen, wie z. B. Fehlausrichtung der Löcher oder Unfähigkeit, bestimmte Teile zu installieren, überprüfen Sie bitte, ob die Schrauben korrekt verwendet werden und passen Sie die Dichtigkeit der Schrauben an.

UK: Before installation, insert the screws into the holes and tighten them, but do not tighten them to 100%, 70% to 80% is sufficient. Finally, after all screws are installed, tighten all screws to 100%.
















If you encounter these issues, such as if the holes cannot be aligned or some parts cannot be installed, please check if the screws are used correctly and adjust the tightness of the screws.

FR: Insérer la vis dans le trou avant la fin de l'assemblage, serrer la vis, mais ne pas serrer à 100%, 70% ~ 80% est correct. Enfin, une fois que toutes les vis sont bien serrées, toutes les vis sont serrées à 100%.














Si vous rencontrez ces problèmes, par exemple si les trous ne sont pas alignés ou si certaines pièces ne peuvent pas être montées, vérifiez que les vis sont utilisées correctement et Ajustez leur serrage.

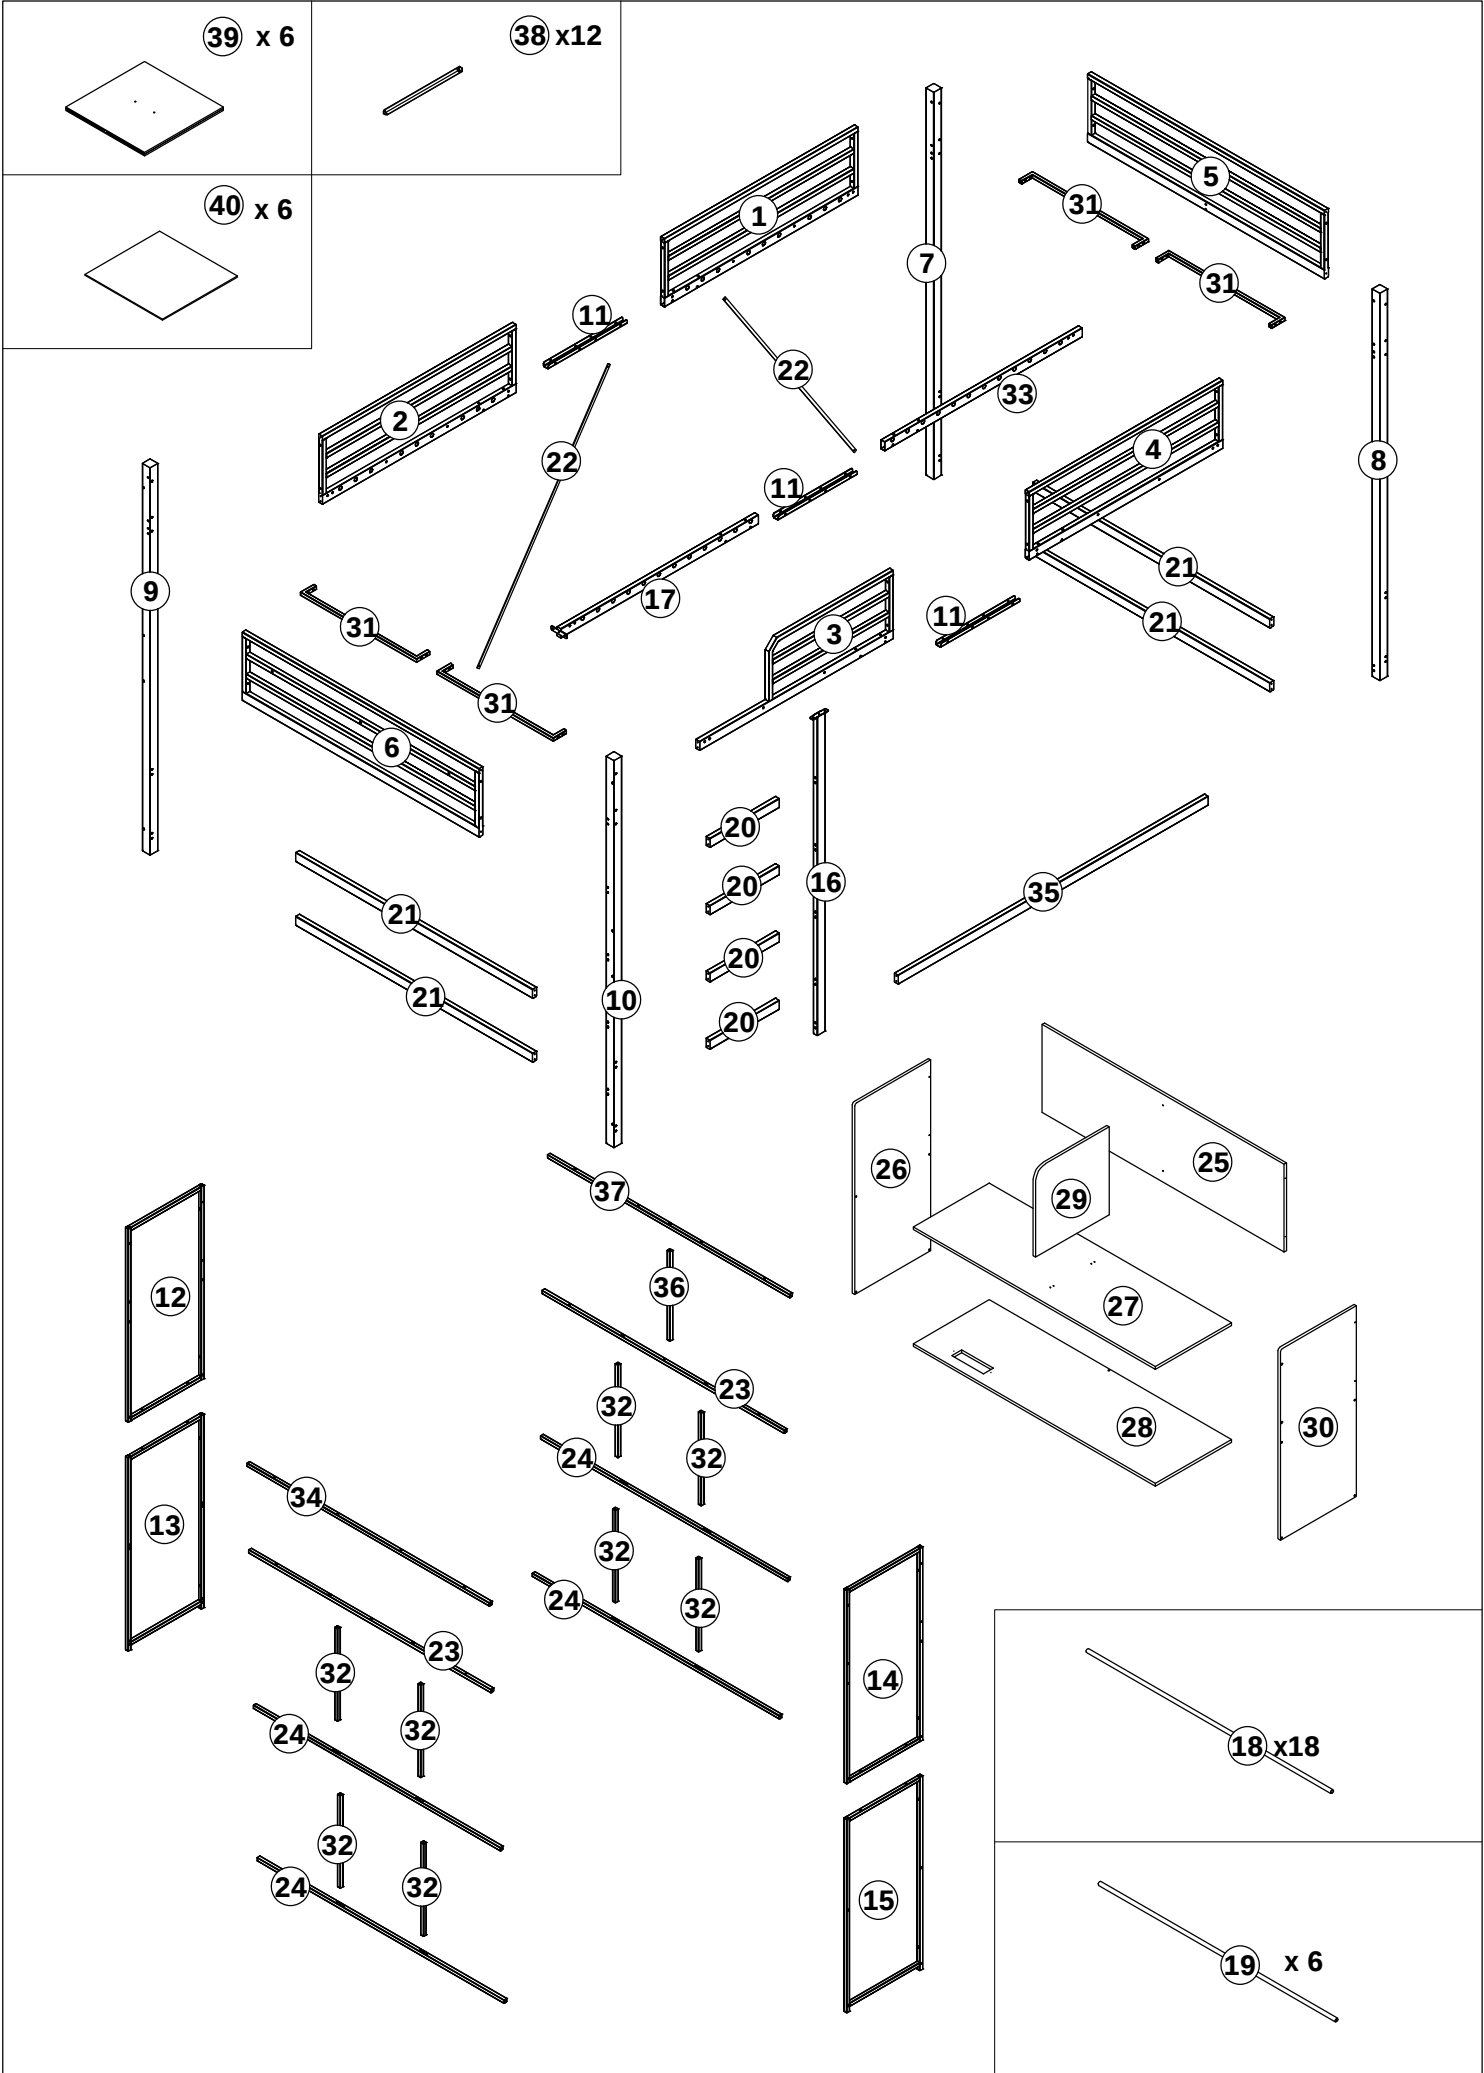











N622P527578S

7		8		9		10	
	1PC		1PC		1PC		1PC
16		17		18		19	
	1PC		1PC		18PCS		6PCS
22		23		24		33	
	2PCS		2PCS		4PCS		1PC
34		35		37			
	1PC		1PC		1PC		














N622P527579S

5		6		11		12	
	1PC		1PC		3PCS		1PC
13		14		15		20	
	1PC		1PC		1PC		4PCS
25		27		28		32	
	1PC		1PC		1PC		8PCS
36		38		40			
	1PC		12PCS		6PCS		




N622P527580S

1  1PC	2  1PC	3  1PC	4  1PC
21  4PCS	26  1PC	29  1PC	30  1PC
31  4PCS	39  6PCS		

Hardware N622P527580S



A  M6x13MM (6+1)PCS	B  M6x25MM (7+1)PCS	C  M6x30MM (25+2)PCS	D  M6x35MM (30+2)PCS
E  M6x45MM (13+2)PCS	F  M6x50MM (8+1)PCS	G  M6x55MM (62+2)PCS	H  M6x12MM (66+2)PCS
J  5x40MM (8+1)PCS	K  M4x13MM (24+2)PCS	L  M6x20MM (29+2)PCS	M  M6x40MM (4+1)PCS
N  Φ6x30MM (2+1)PCS	P  6SETS	Q  1SET	R  1SET
S  2PCS	T  (2+1)SETS		

Schritt 1

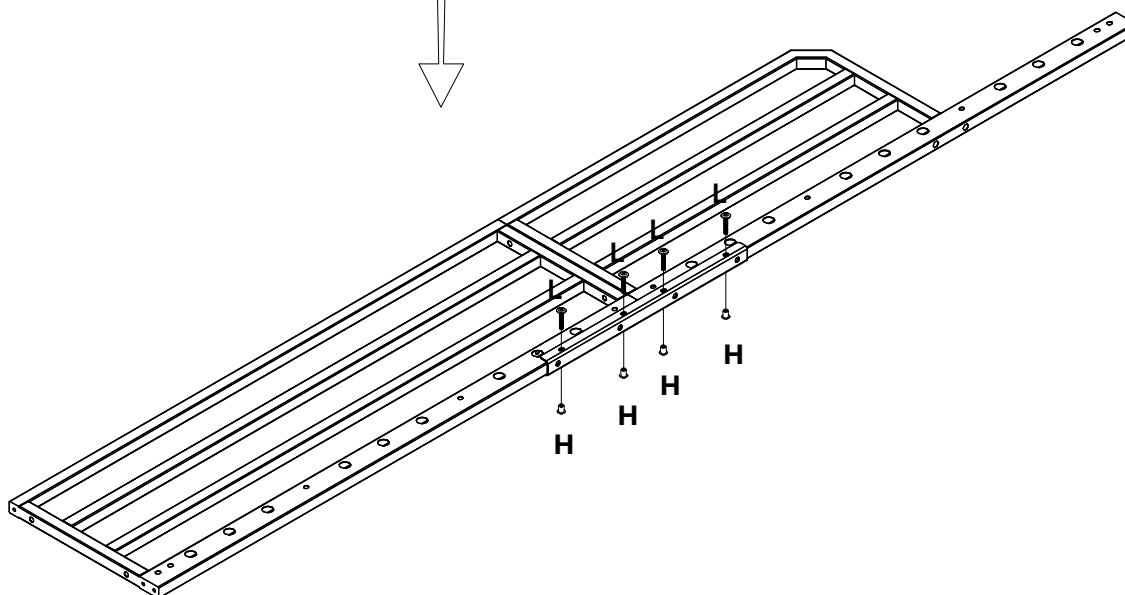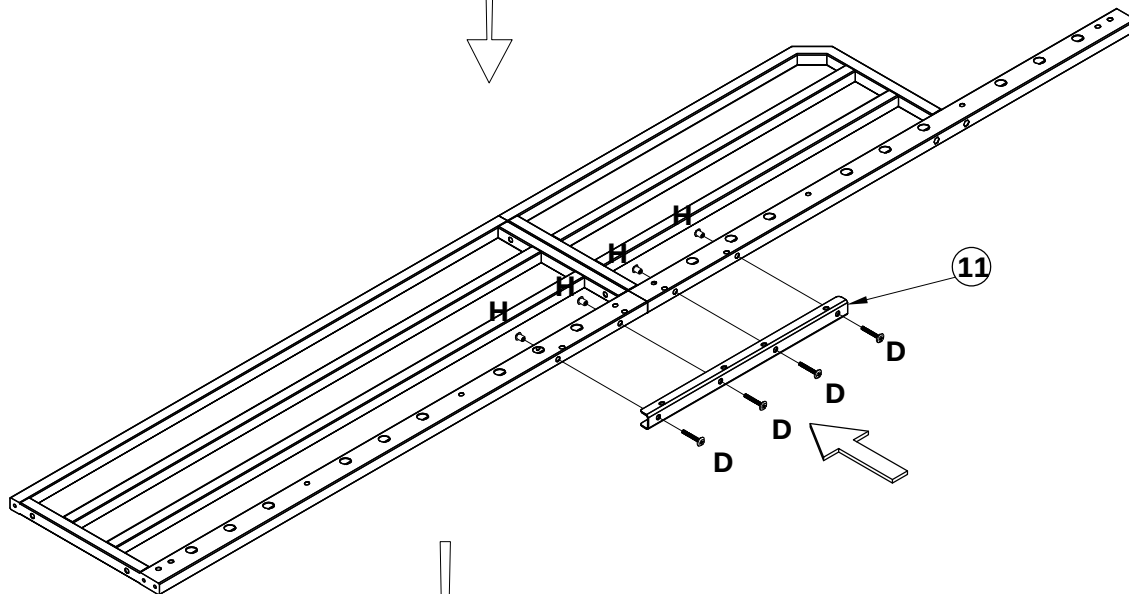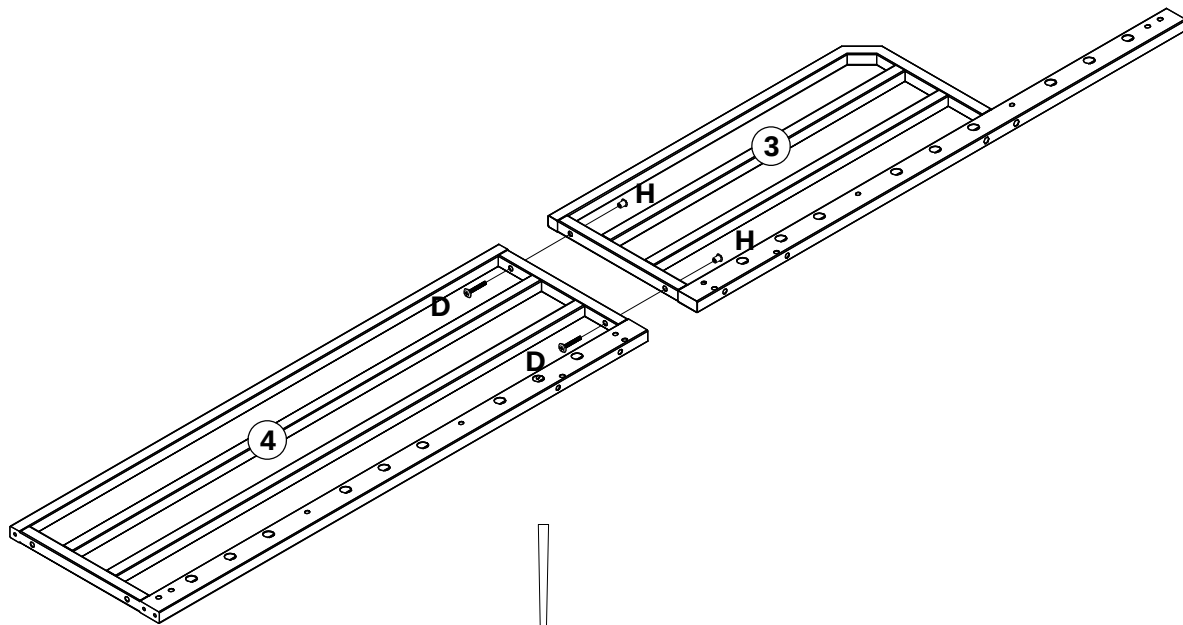



D  M6x35MM 6PCS	H  M6x12MM 10PCS	L  M6x20MM 4PCS
---	---	--

Schritt 2

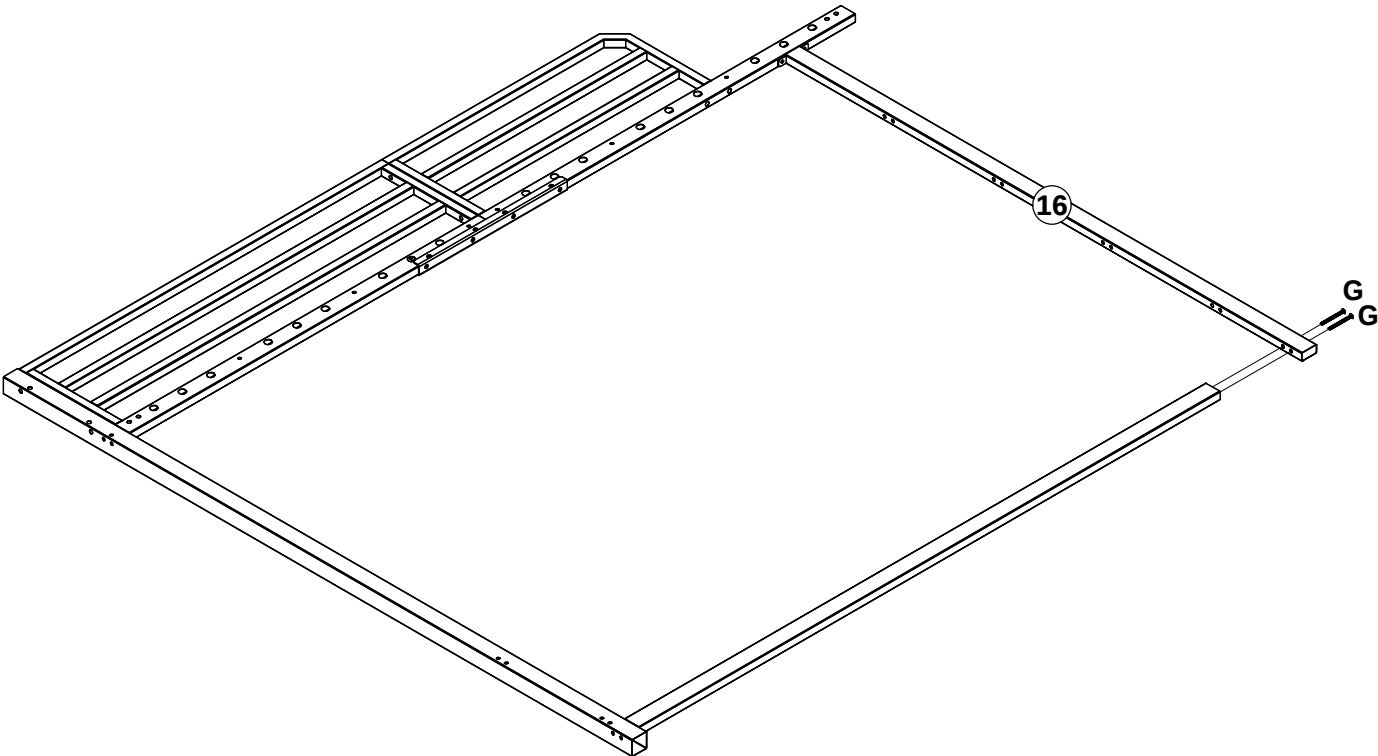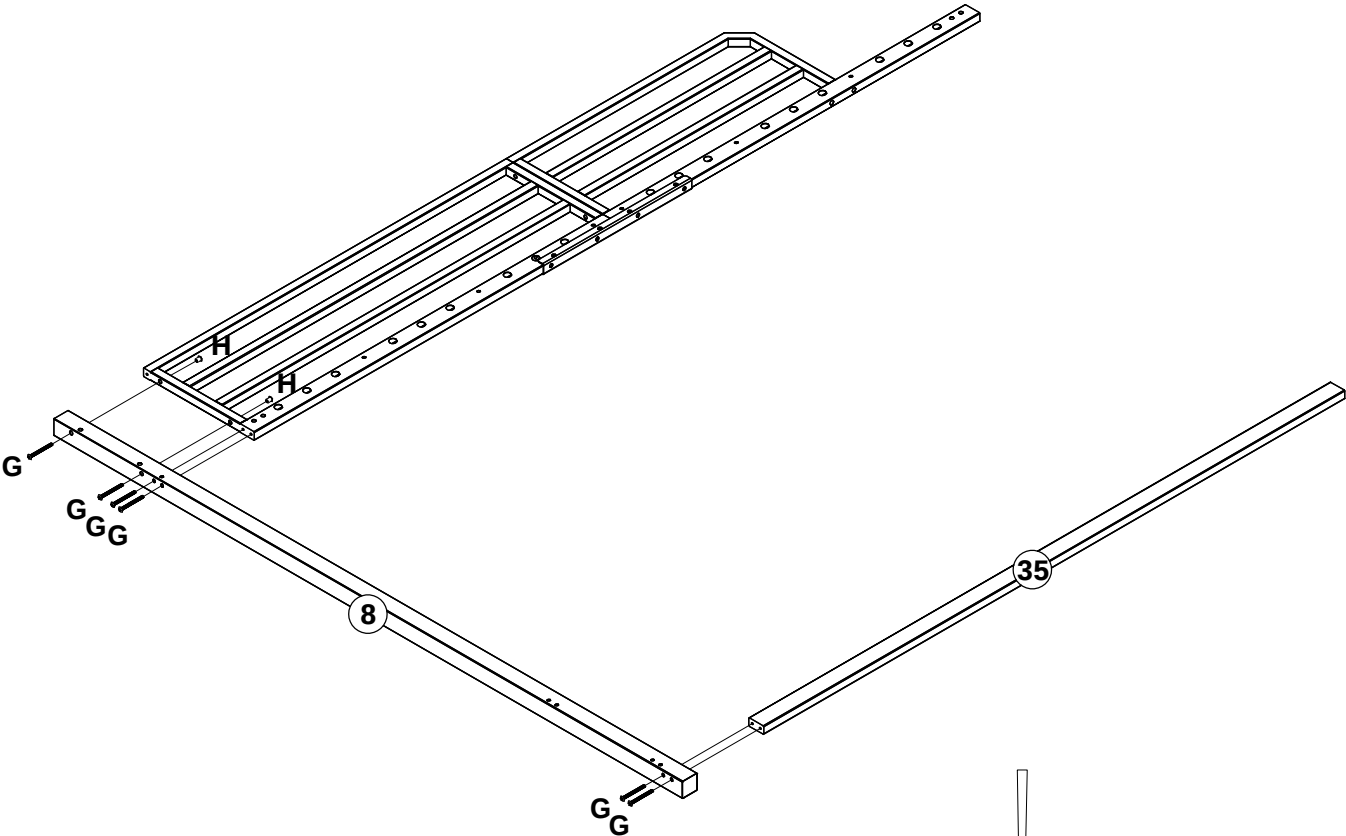

G		H	
M6x55MM	8PCS	M6x12MM	2PCS


Schritt 3

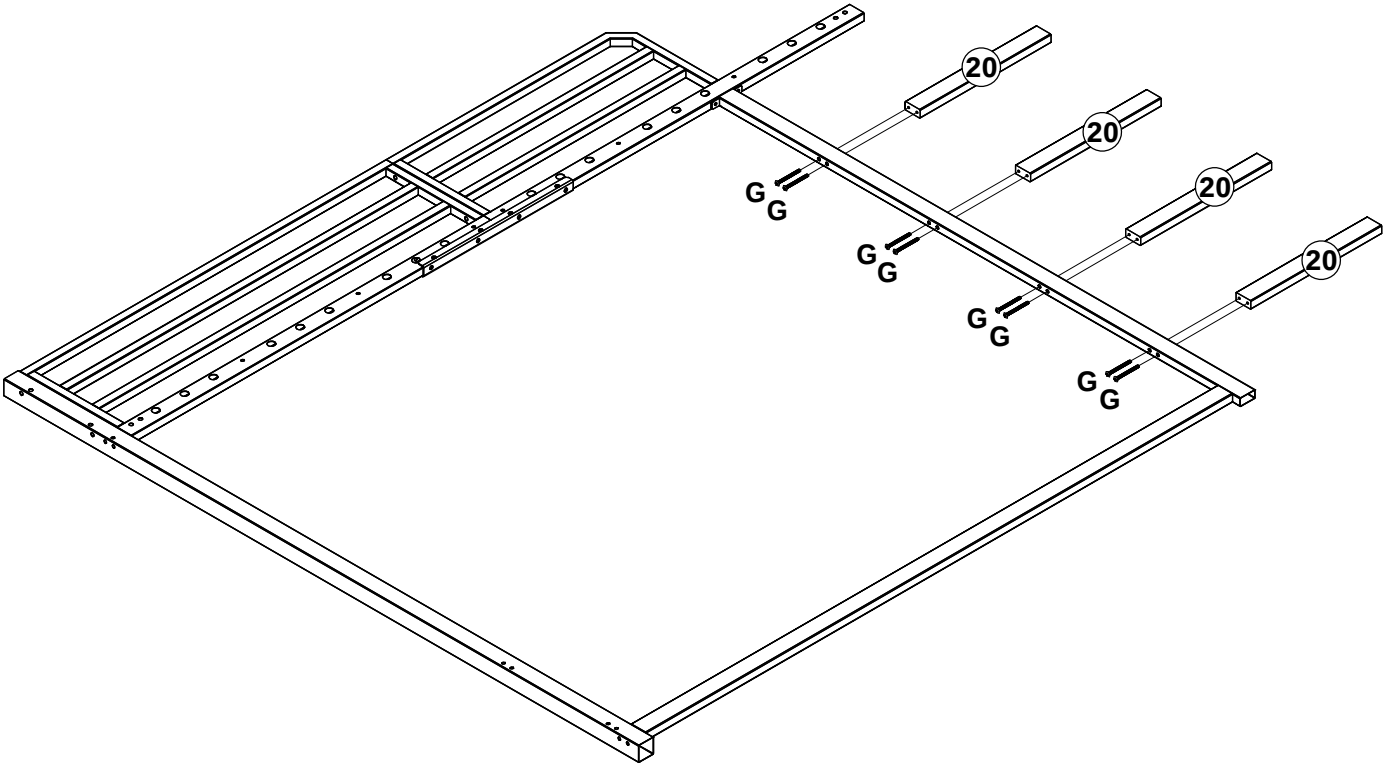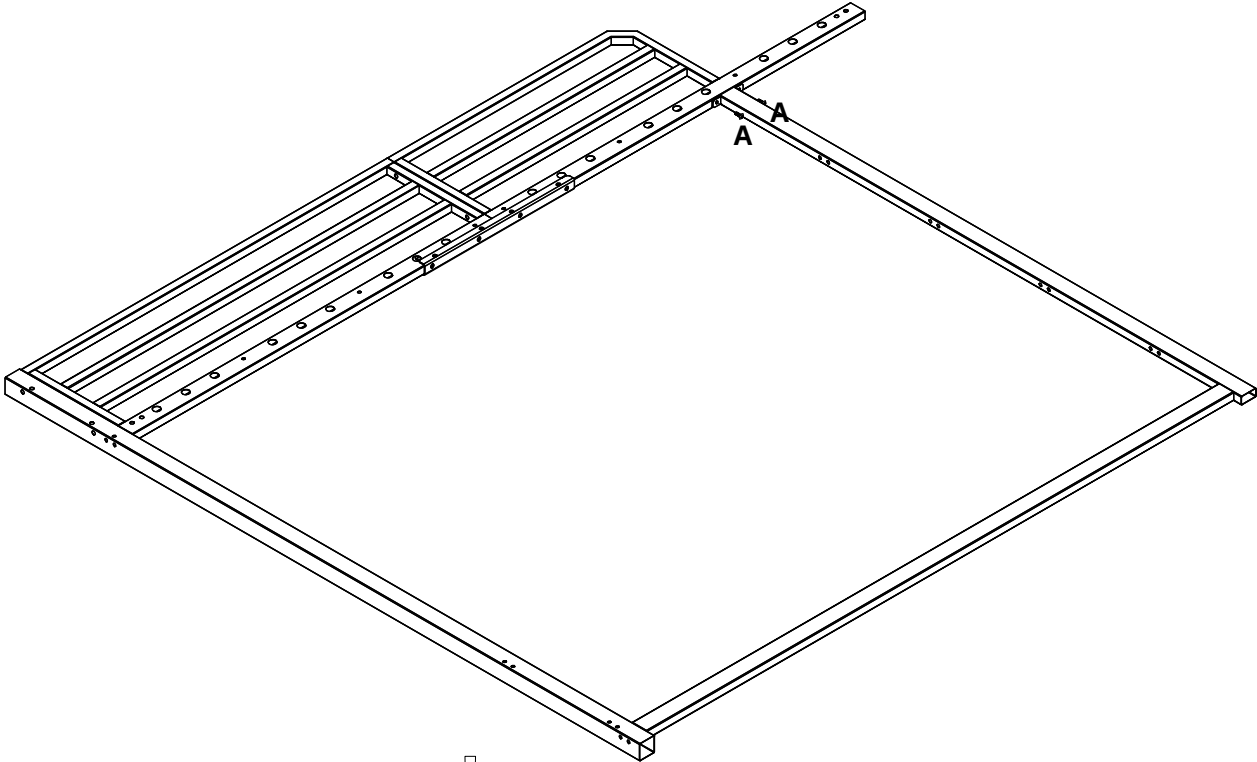

A 	G 
M6x13MM 2PCS	M6x55MM 8PCS


Schritt 4

There are two impassable holes here, facing up.

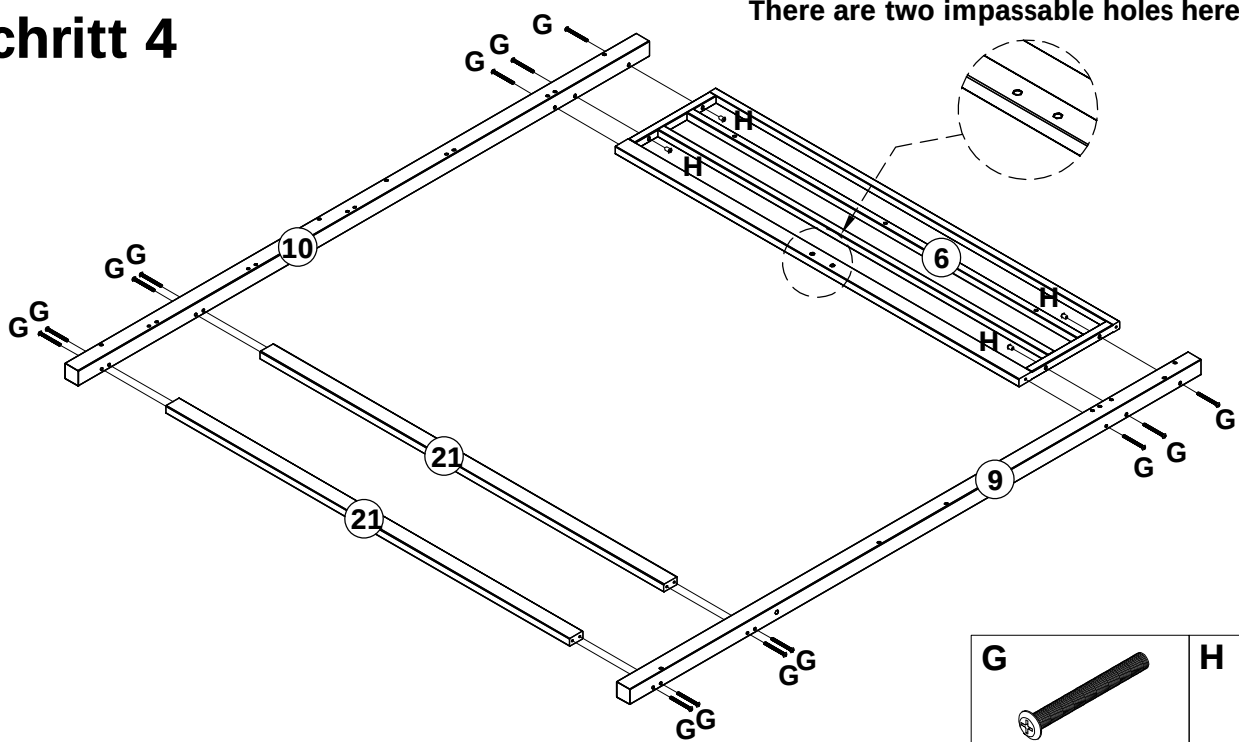


G		H	
M6x55MM	14PCS	M6x12MM	4PCS

Schritt 5

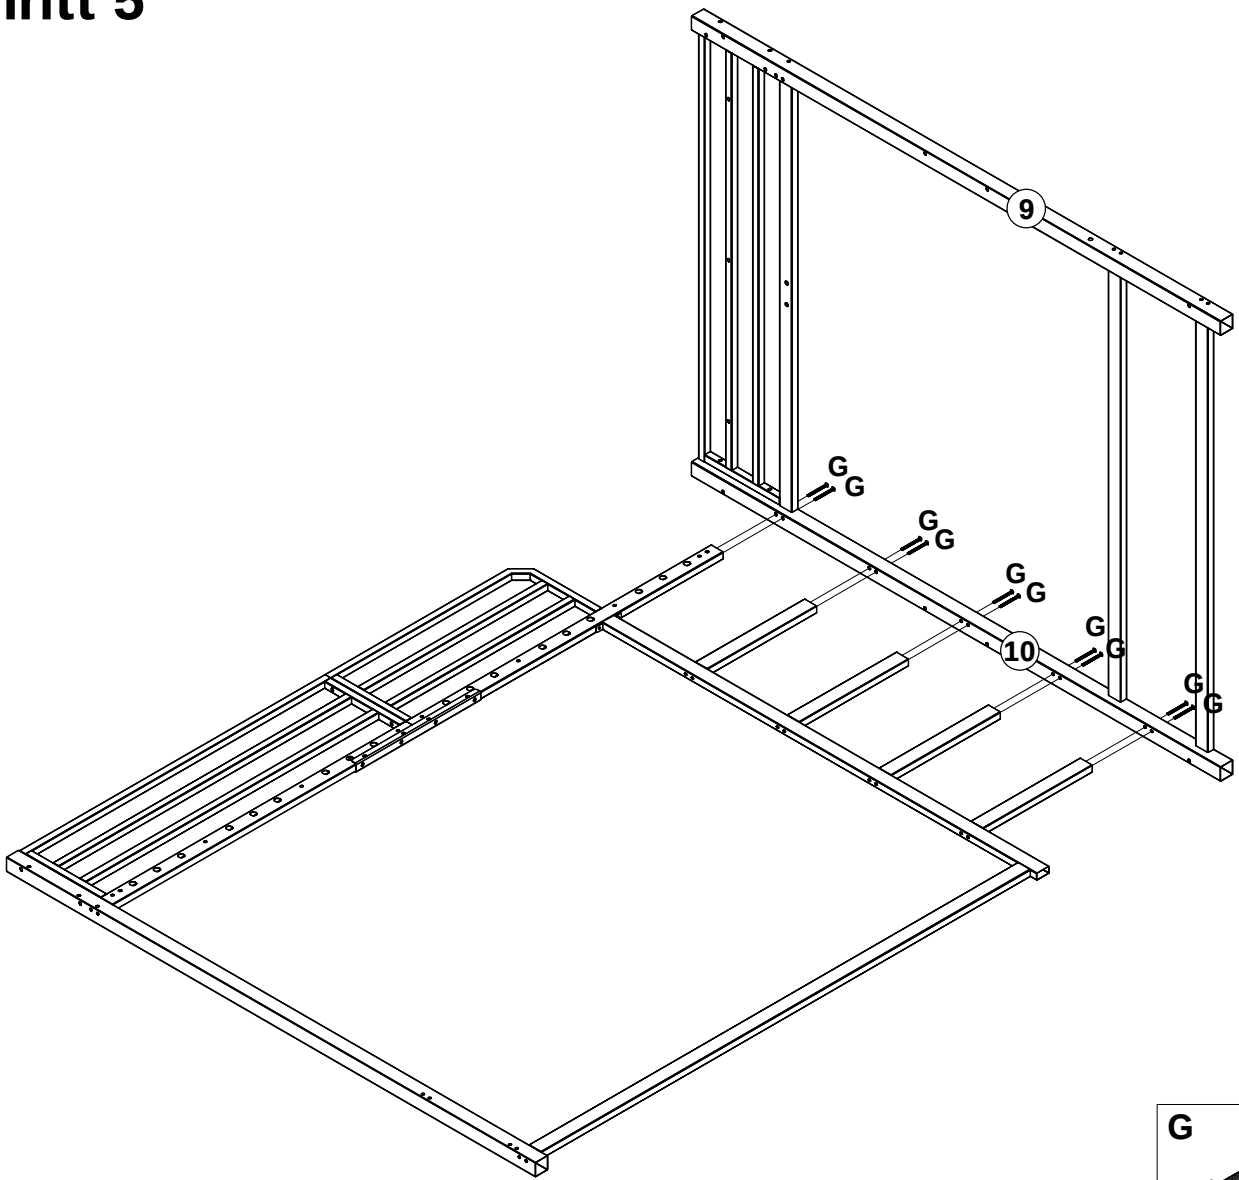


G	
M6x55MM	10PCS

Schritt 6

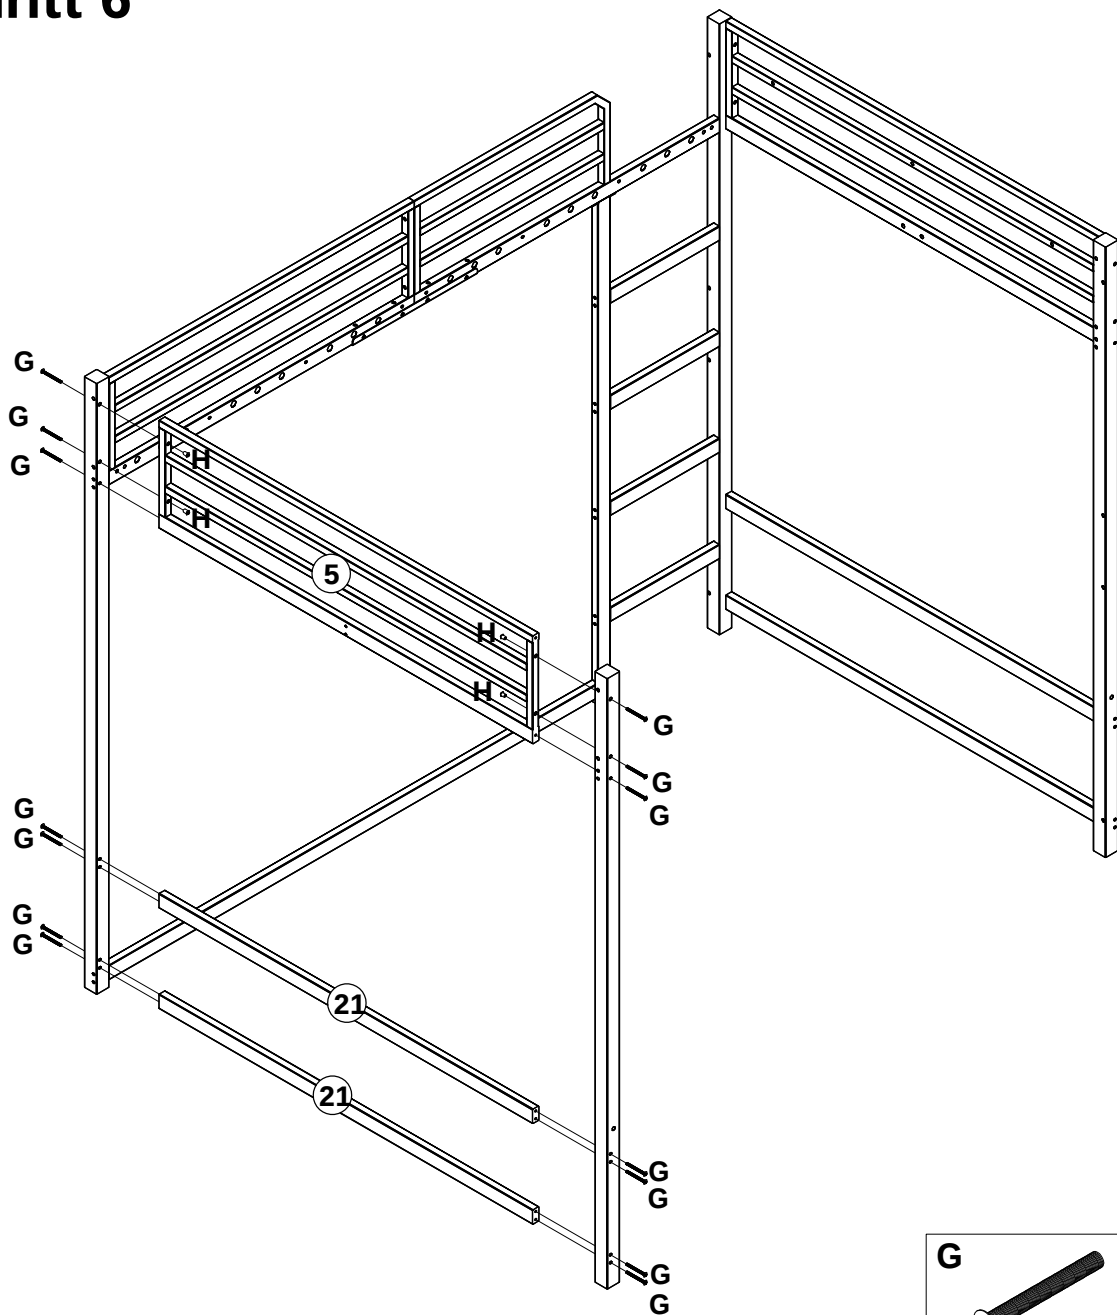


G		H	
M6x55MM	14PCS	M6x12MM	4PCS

Schritt 7

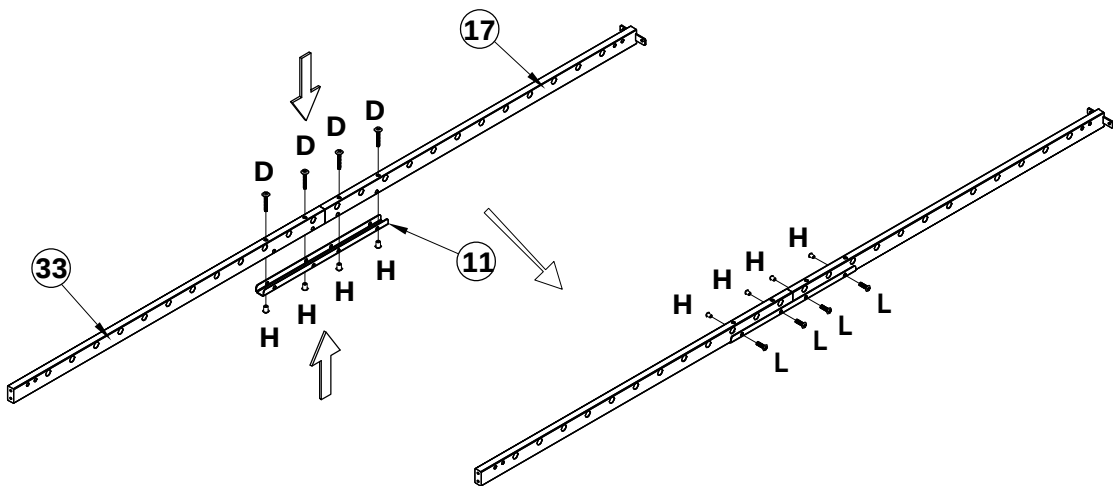


D		M6x35MM	4PCS
H		M6x12MM	8PCS
L		M6x20MM	4PCS

Schritt 8

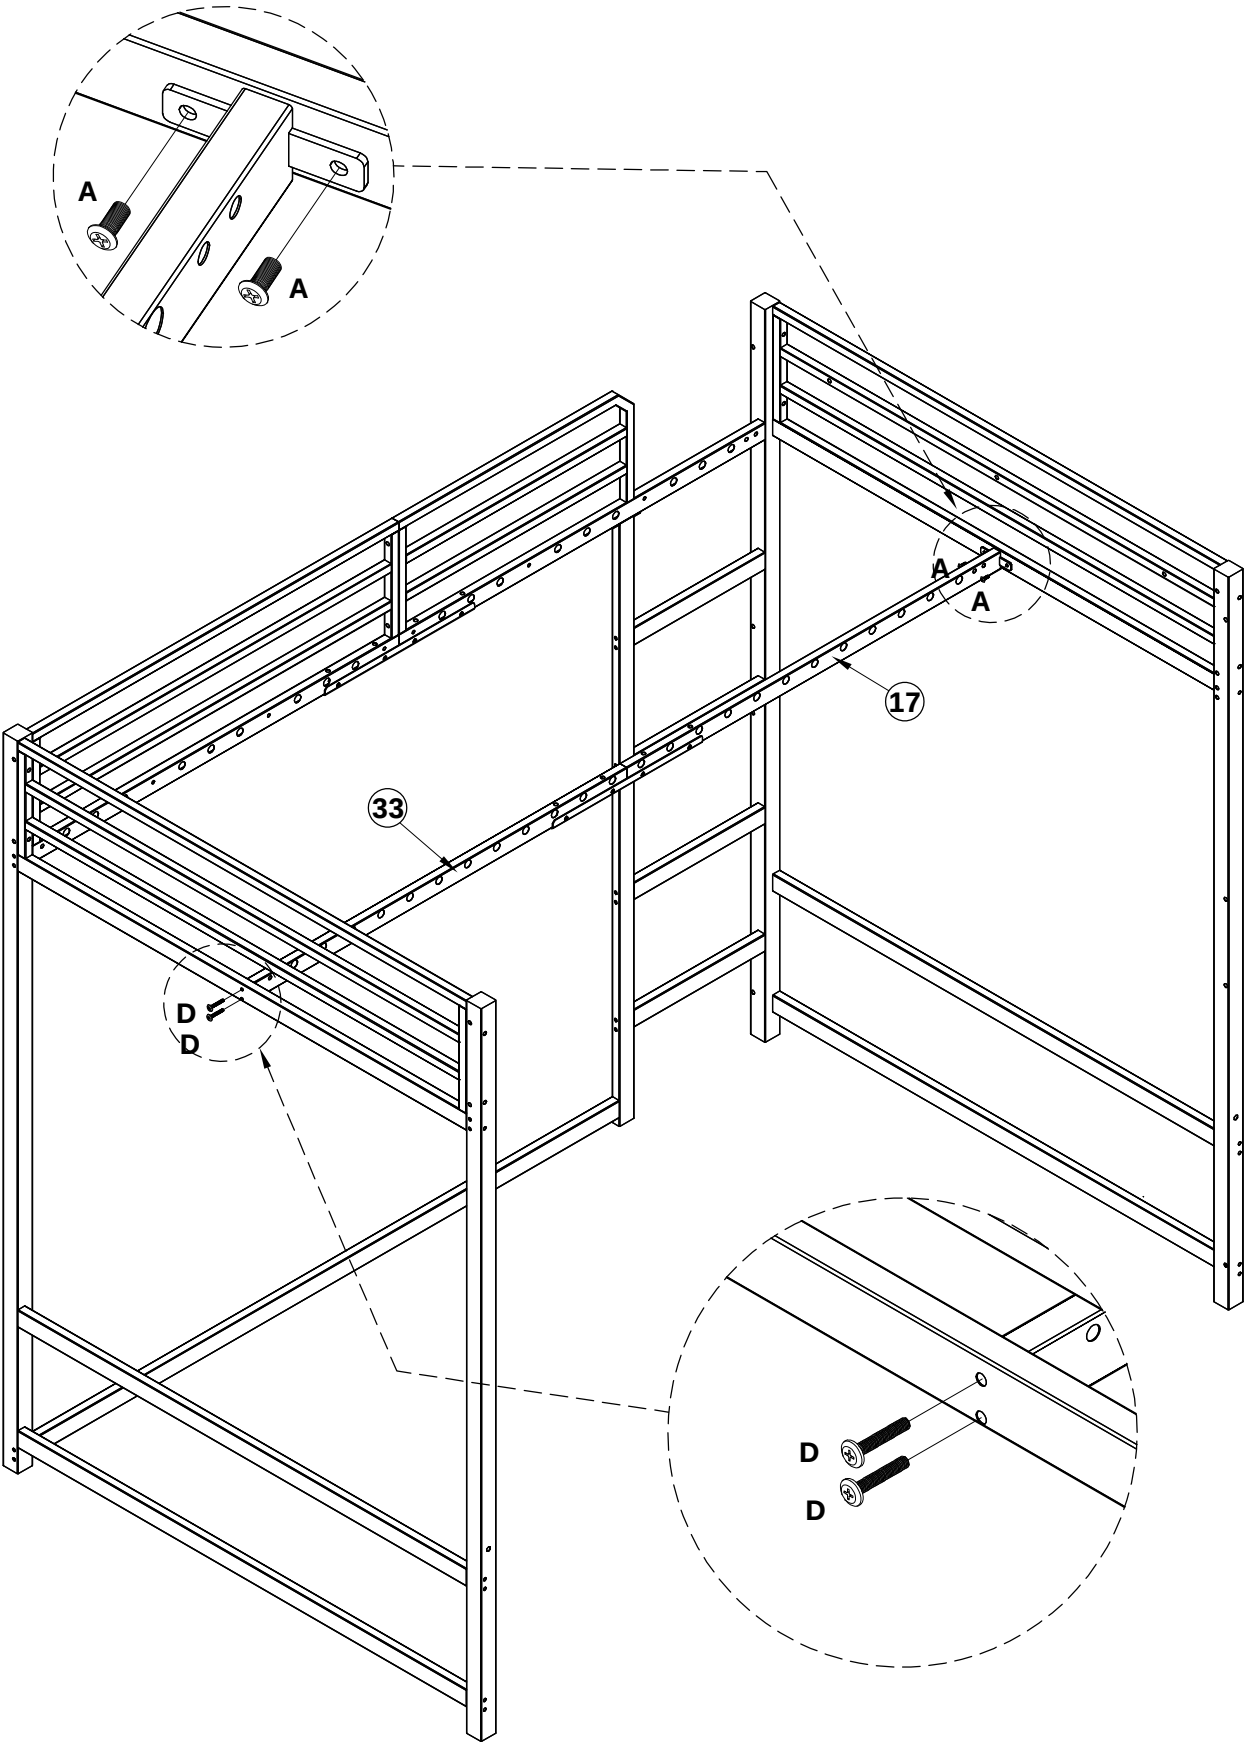


A		D	
M6x13MM	2PCS	M6x35MM	2PCS

Schritt 9

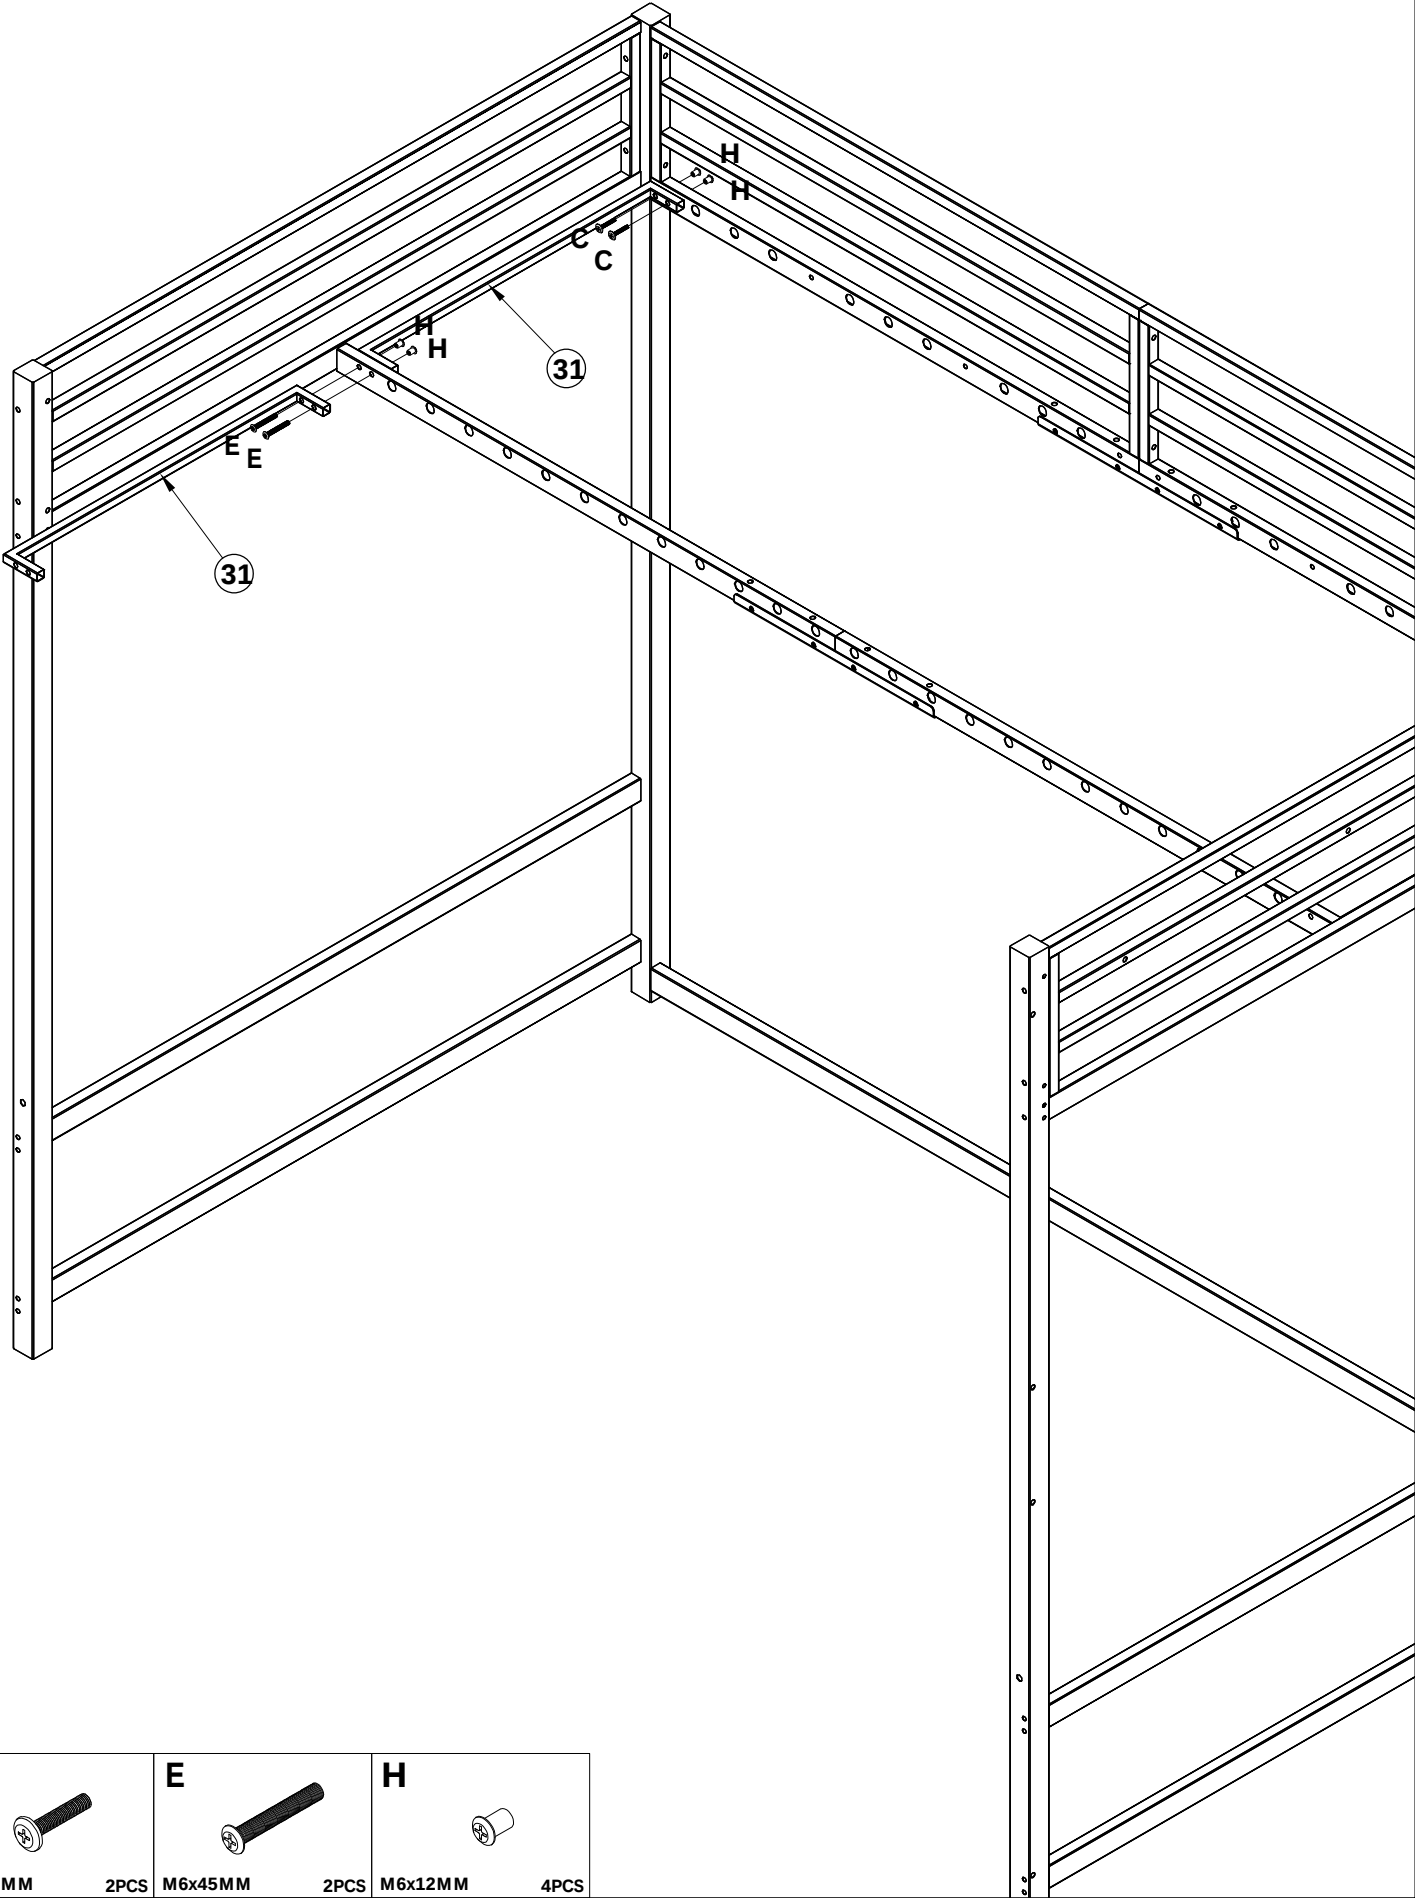


C  M6x30MM 2PCS	E  M6x45MM 2PCS	H  M6x12MM 4PCS
---	---	---

Schritt 10

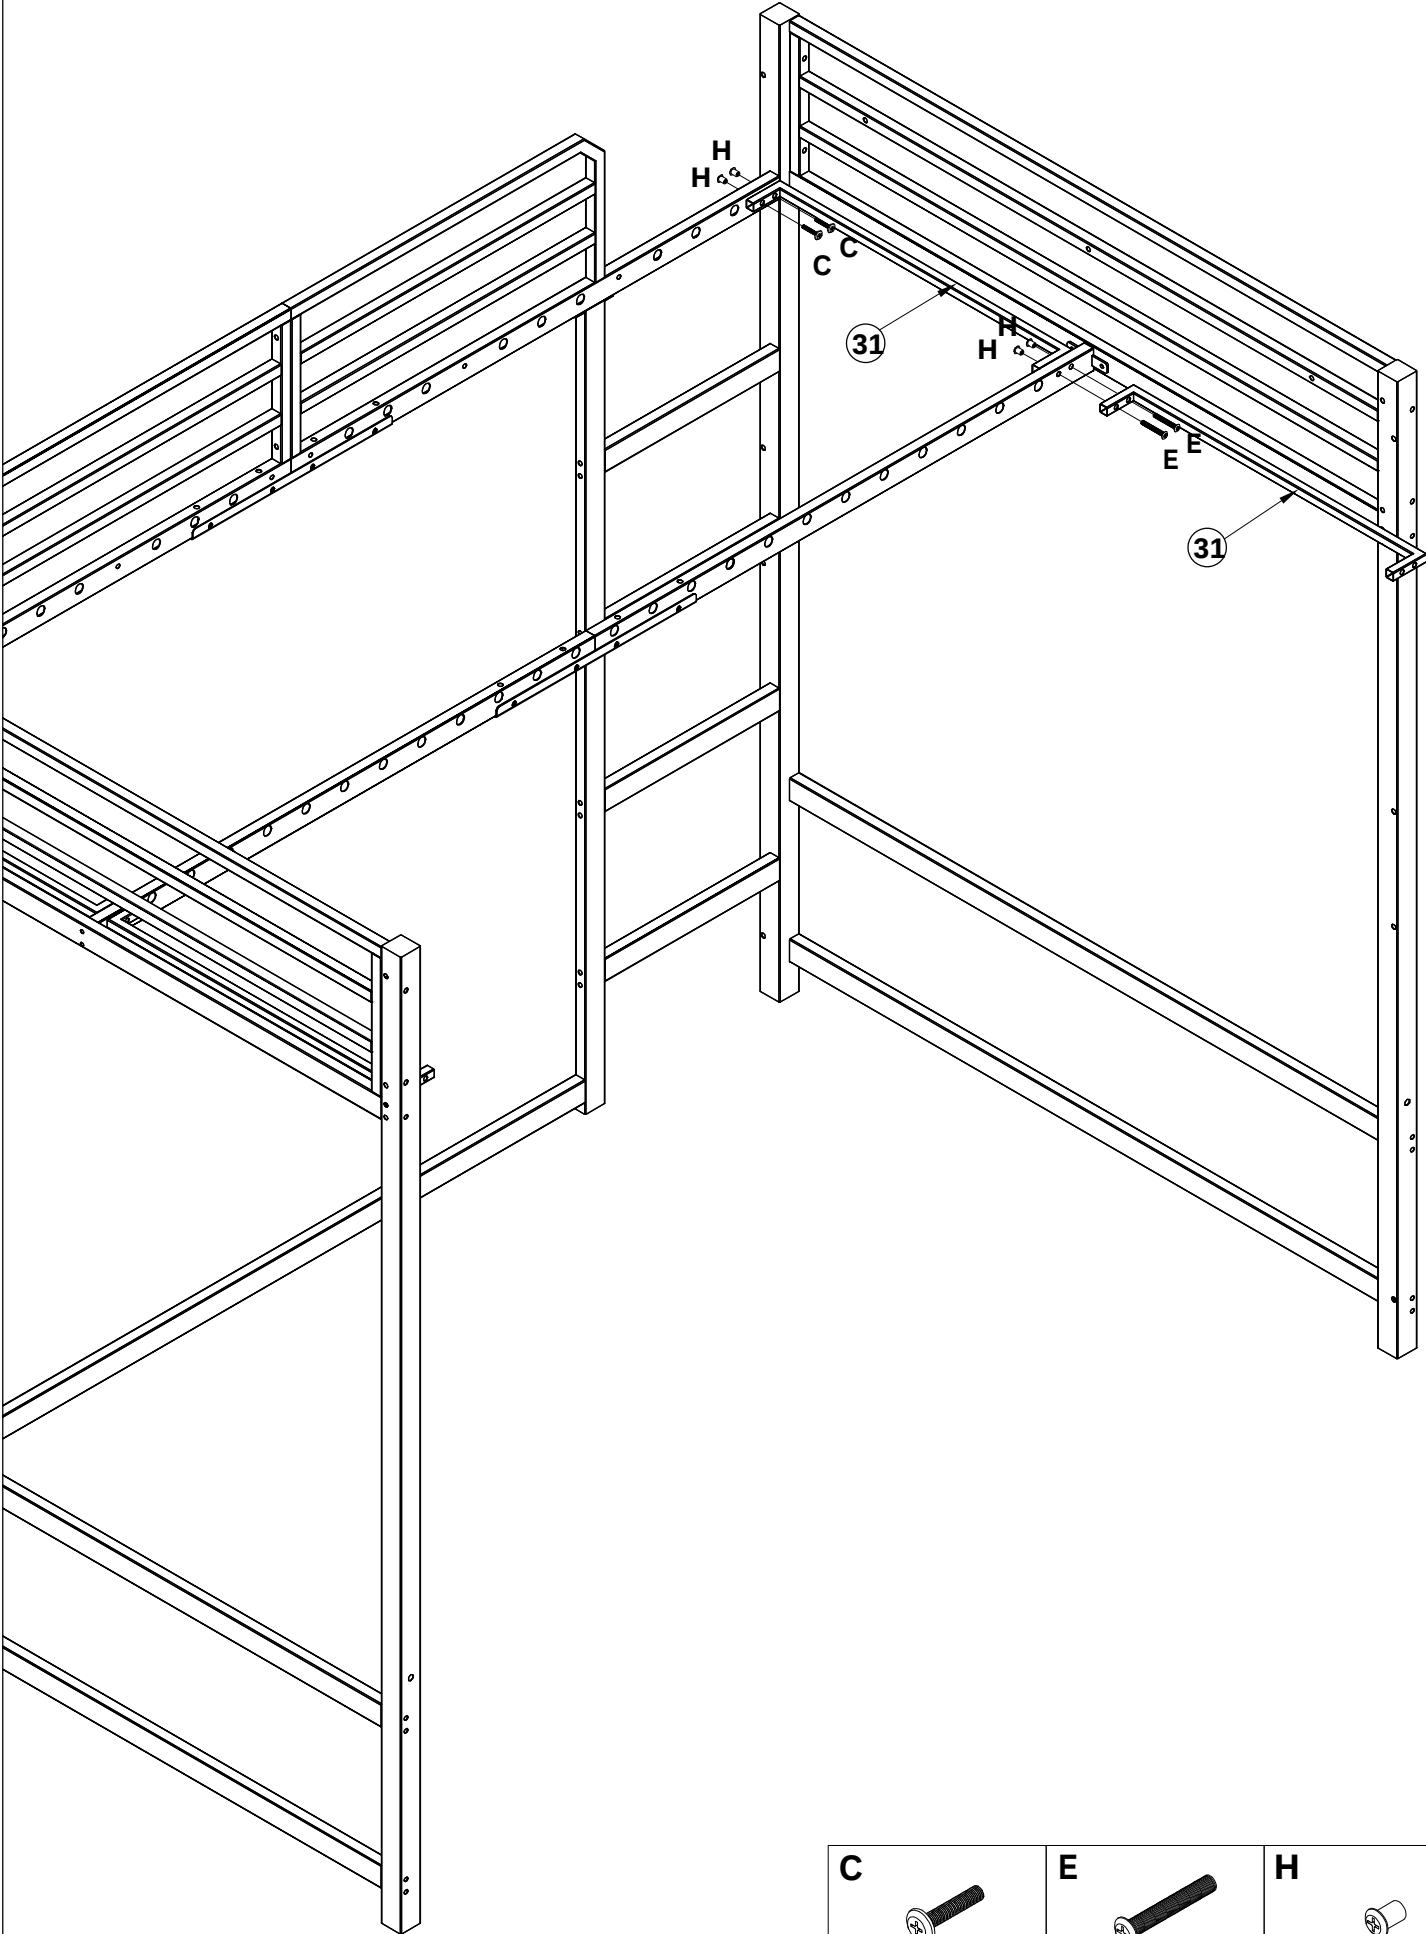

C  M6x30MM 2PCS	E  M6x45MM 2PCS	H  M6x12MM 4PCS
--	---	---


Schritt 11

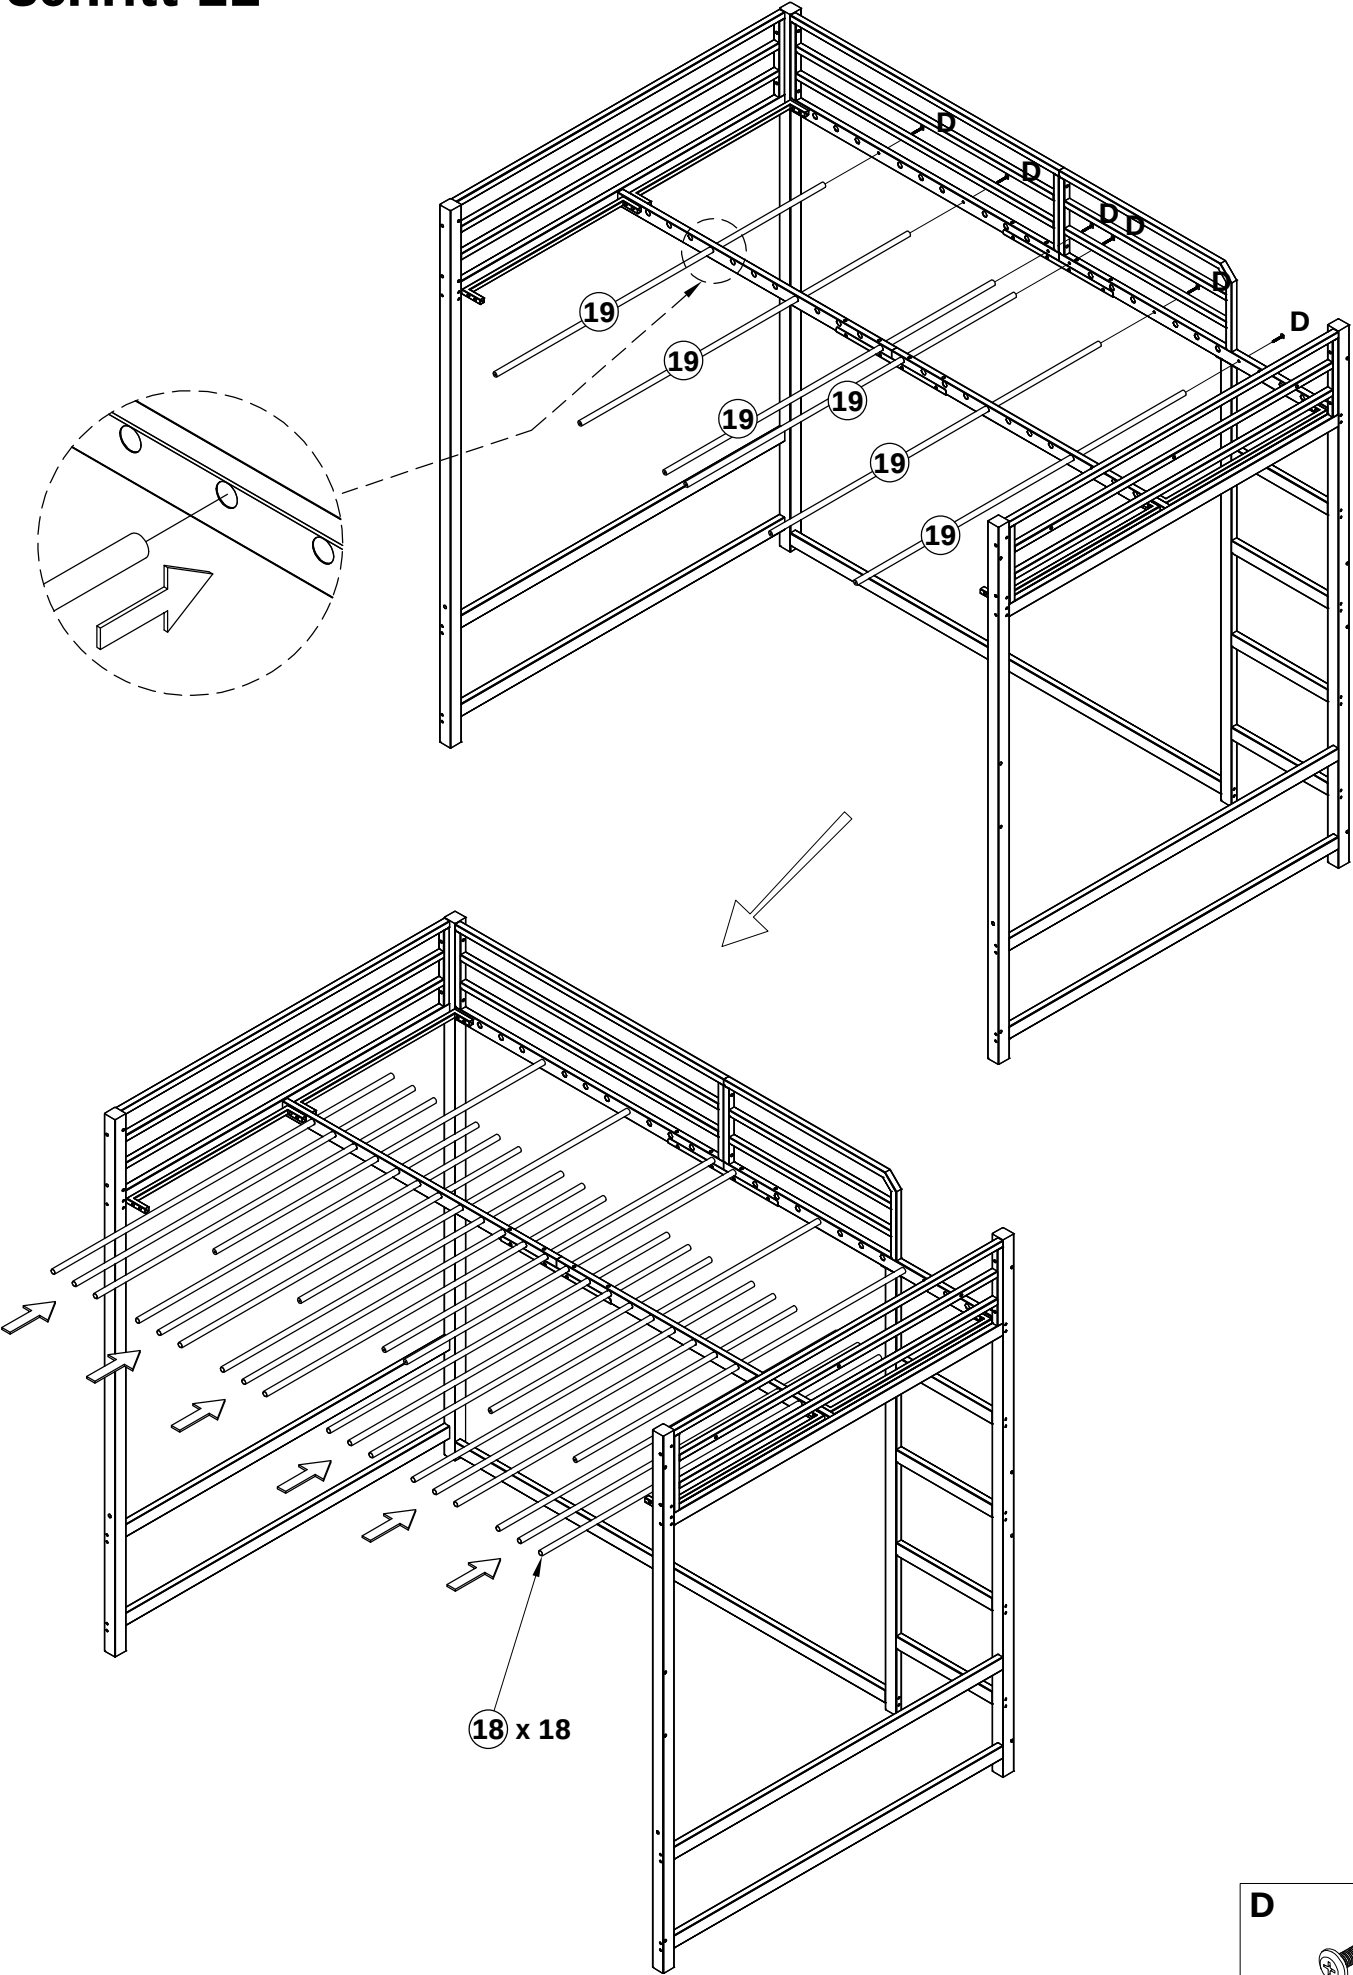

D


M6x35MM **6PCS**

Schritt 12

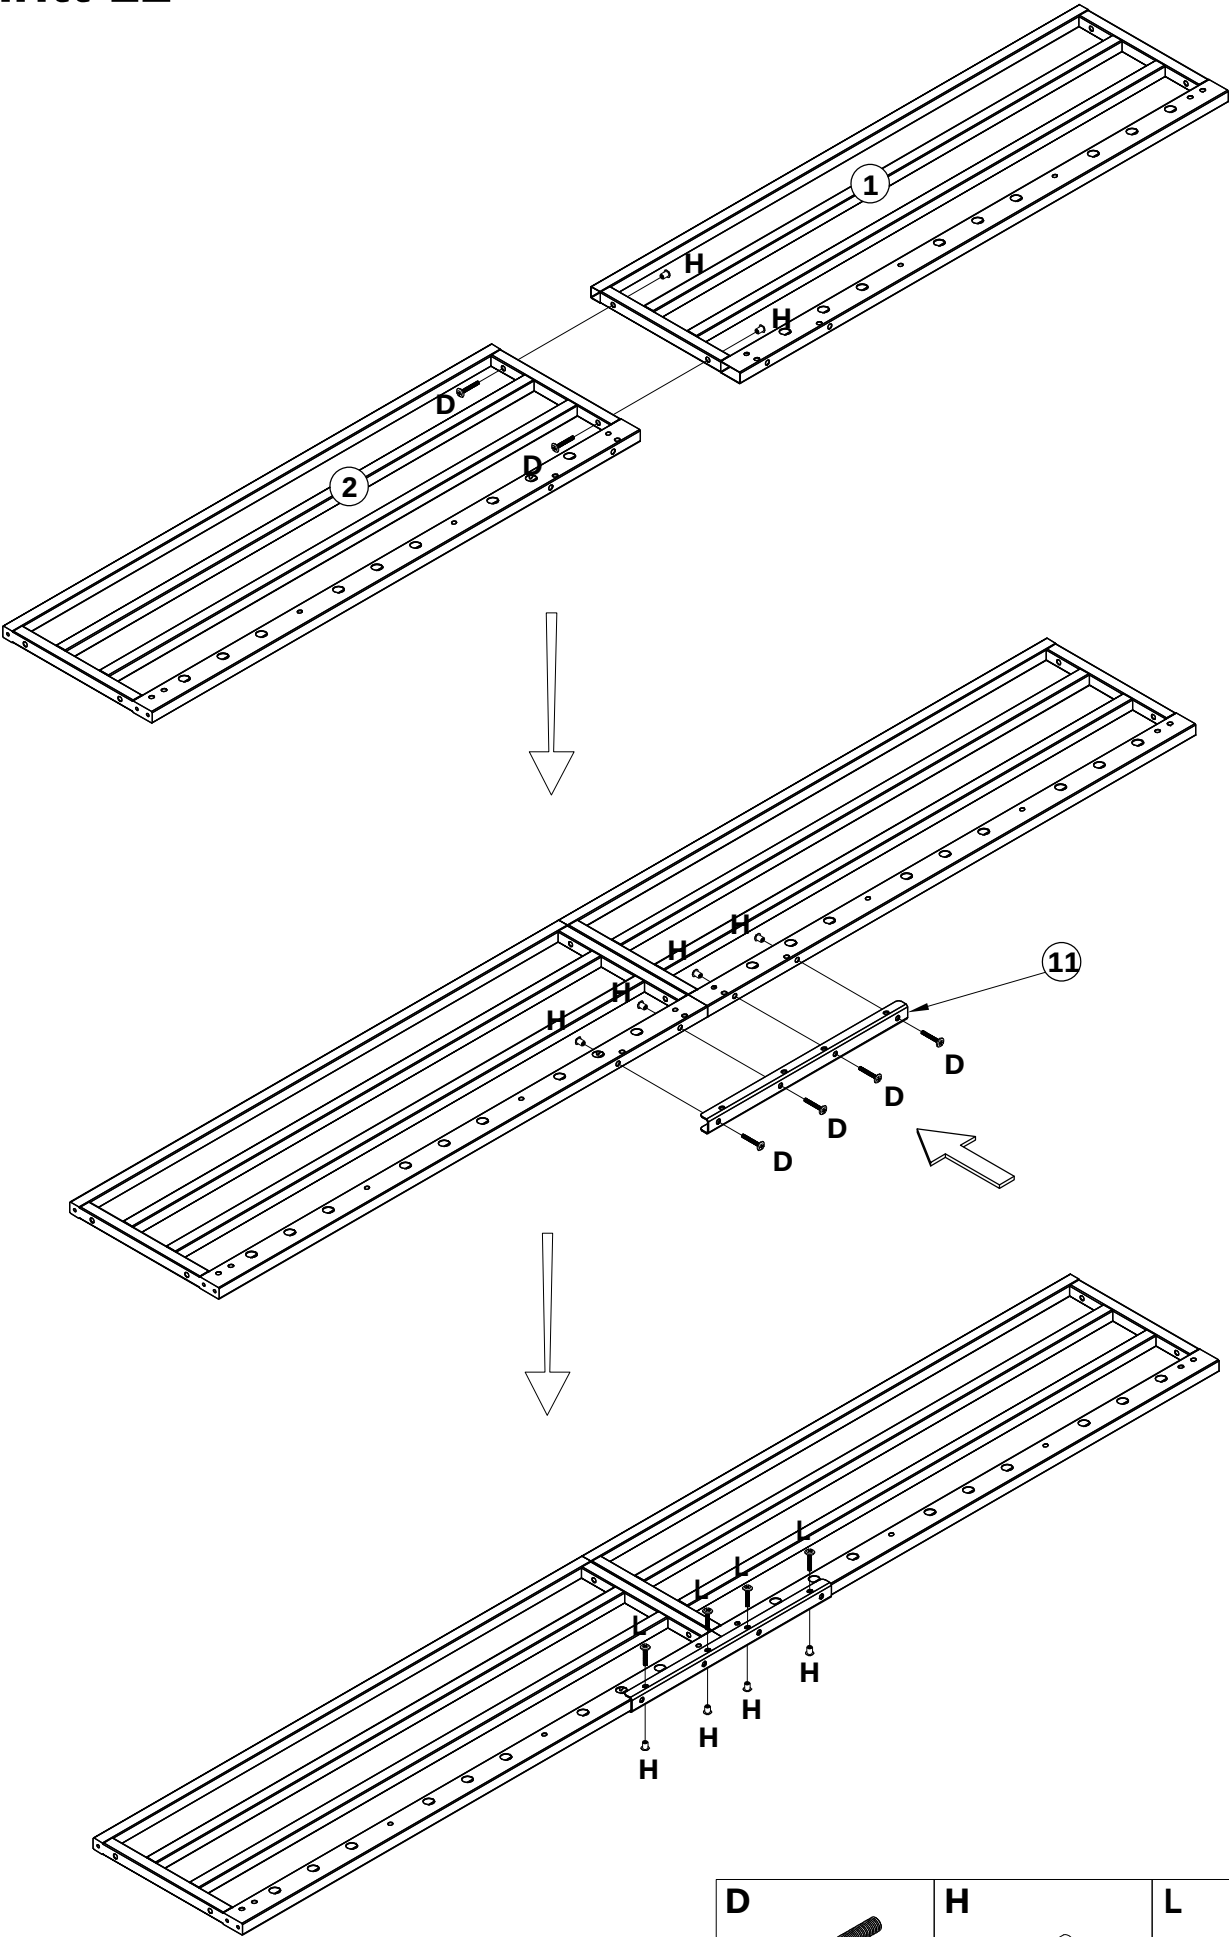

D  M6x35MM 6PCS	H  M6x12MM 10PCS	L  M6x20MM 4PCS
--	--	---

Schritt 13

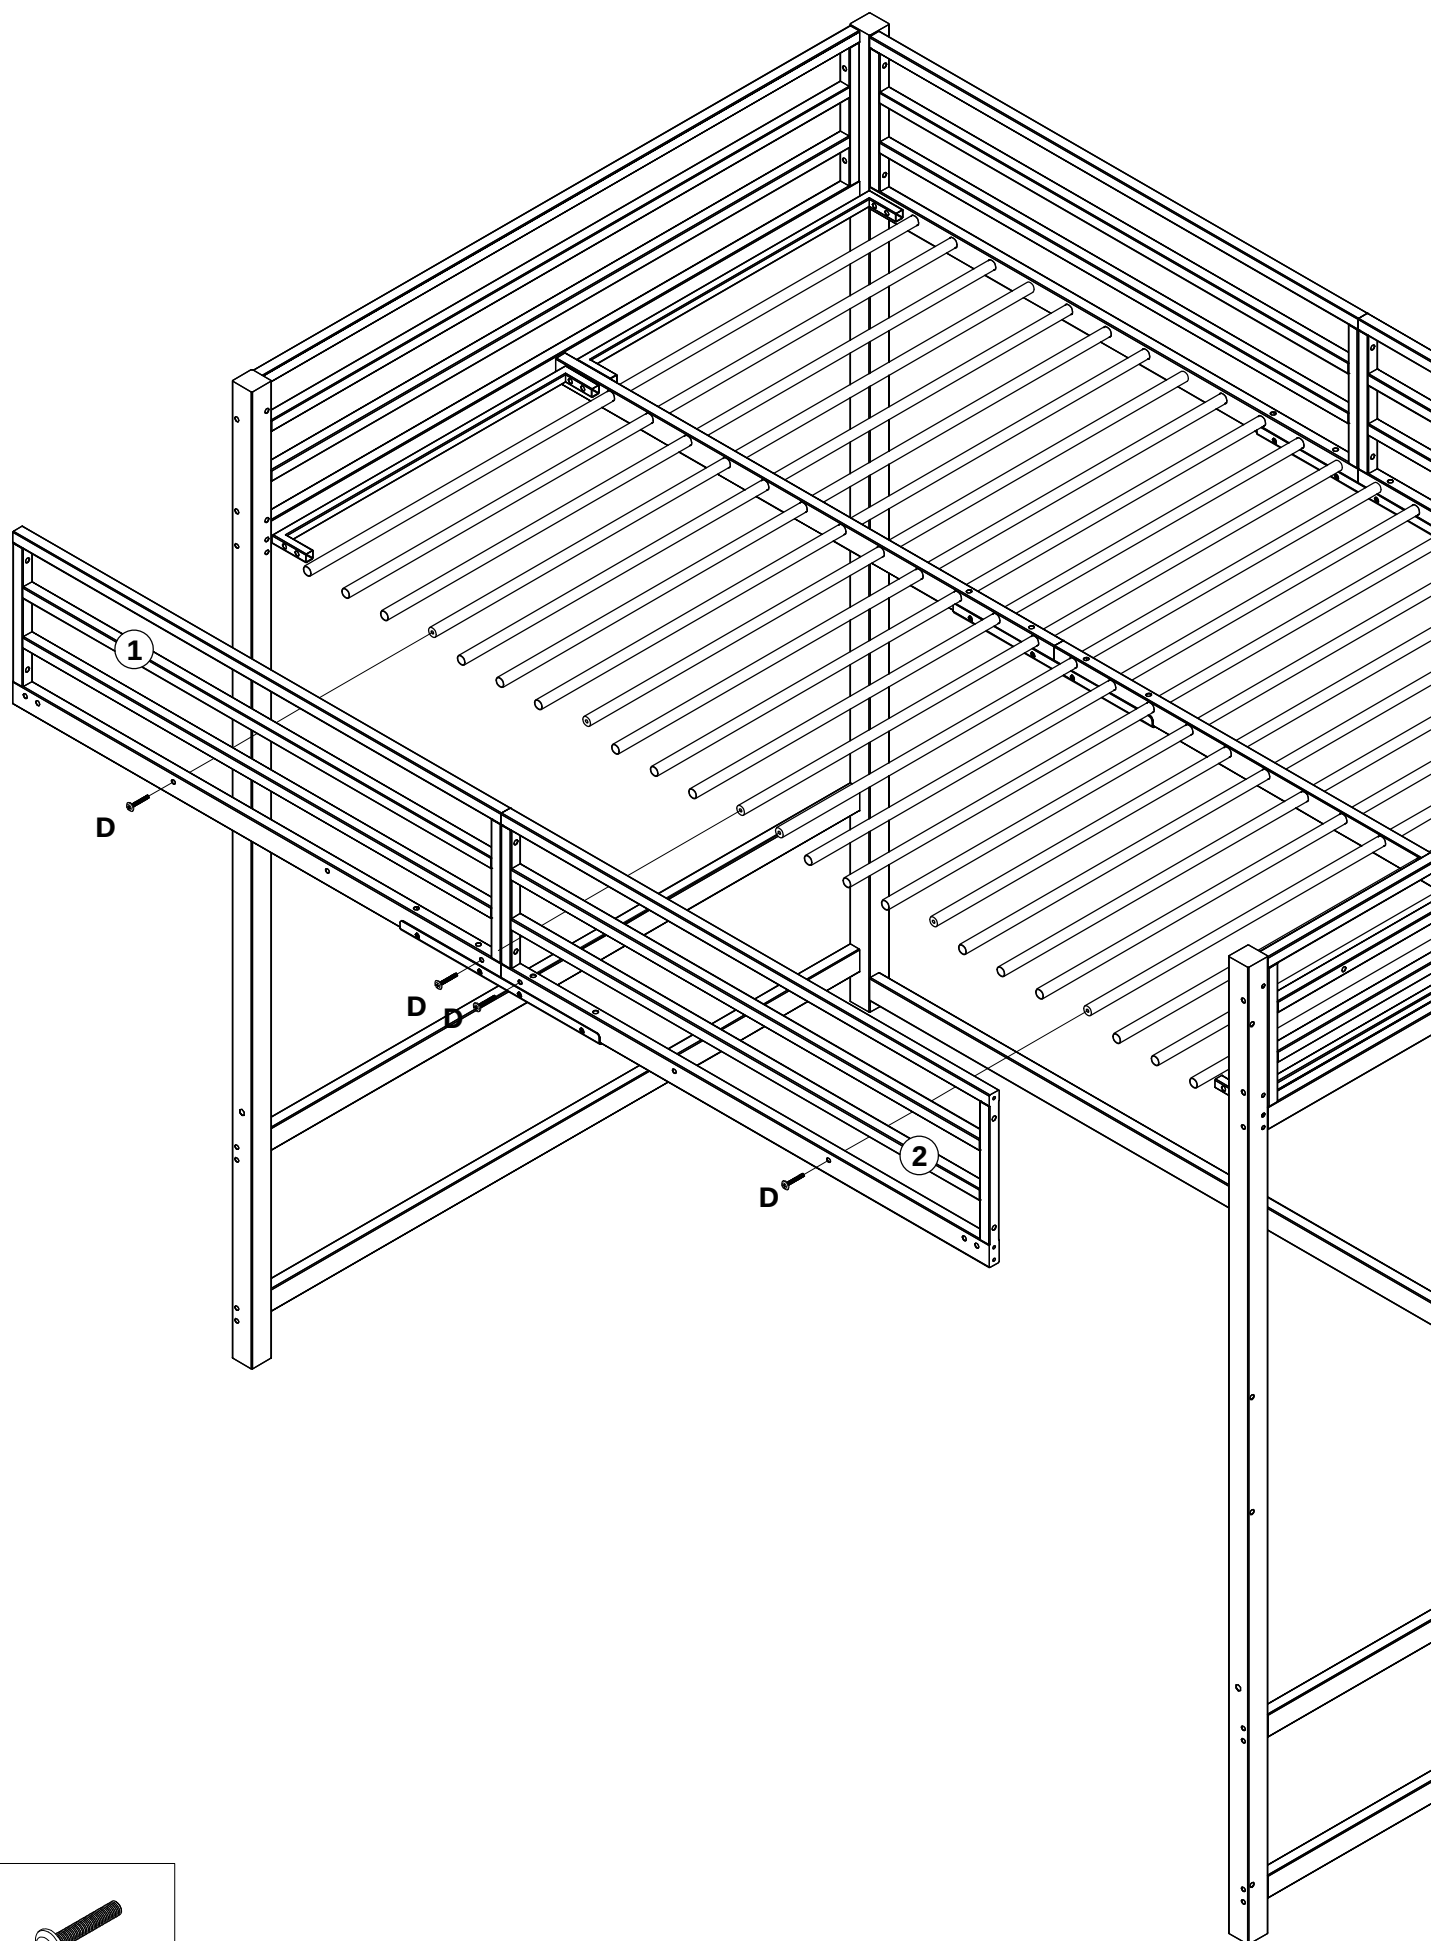


D



M6x35MM


4PCS

Schritt 14

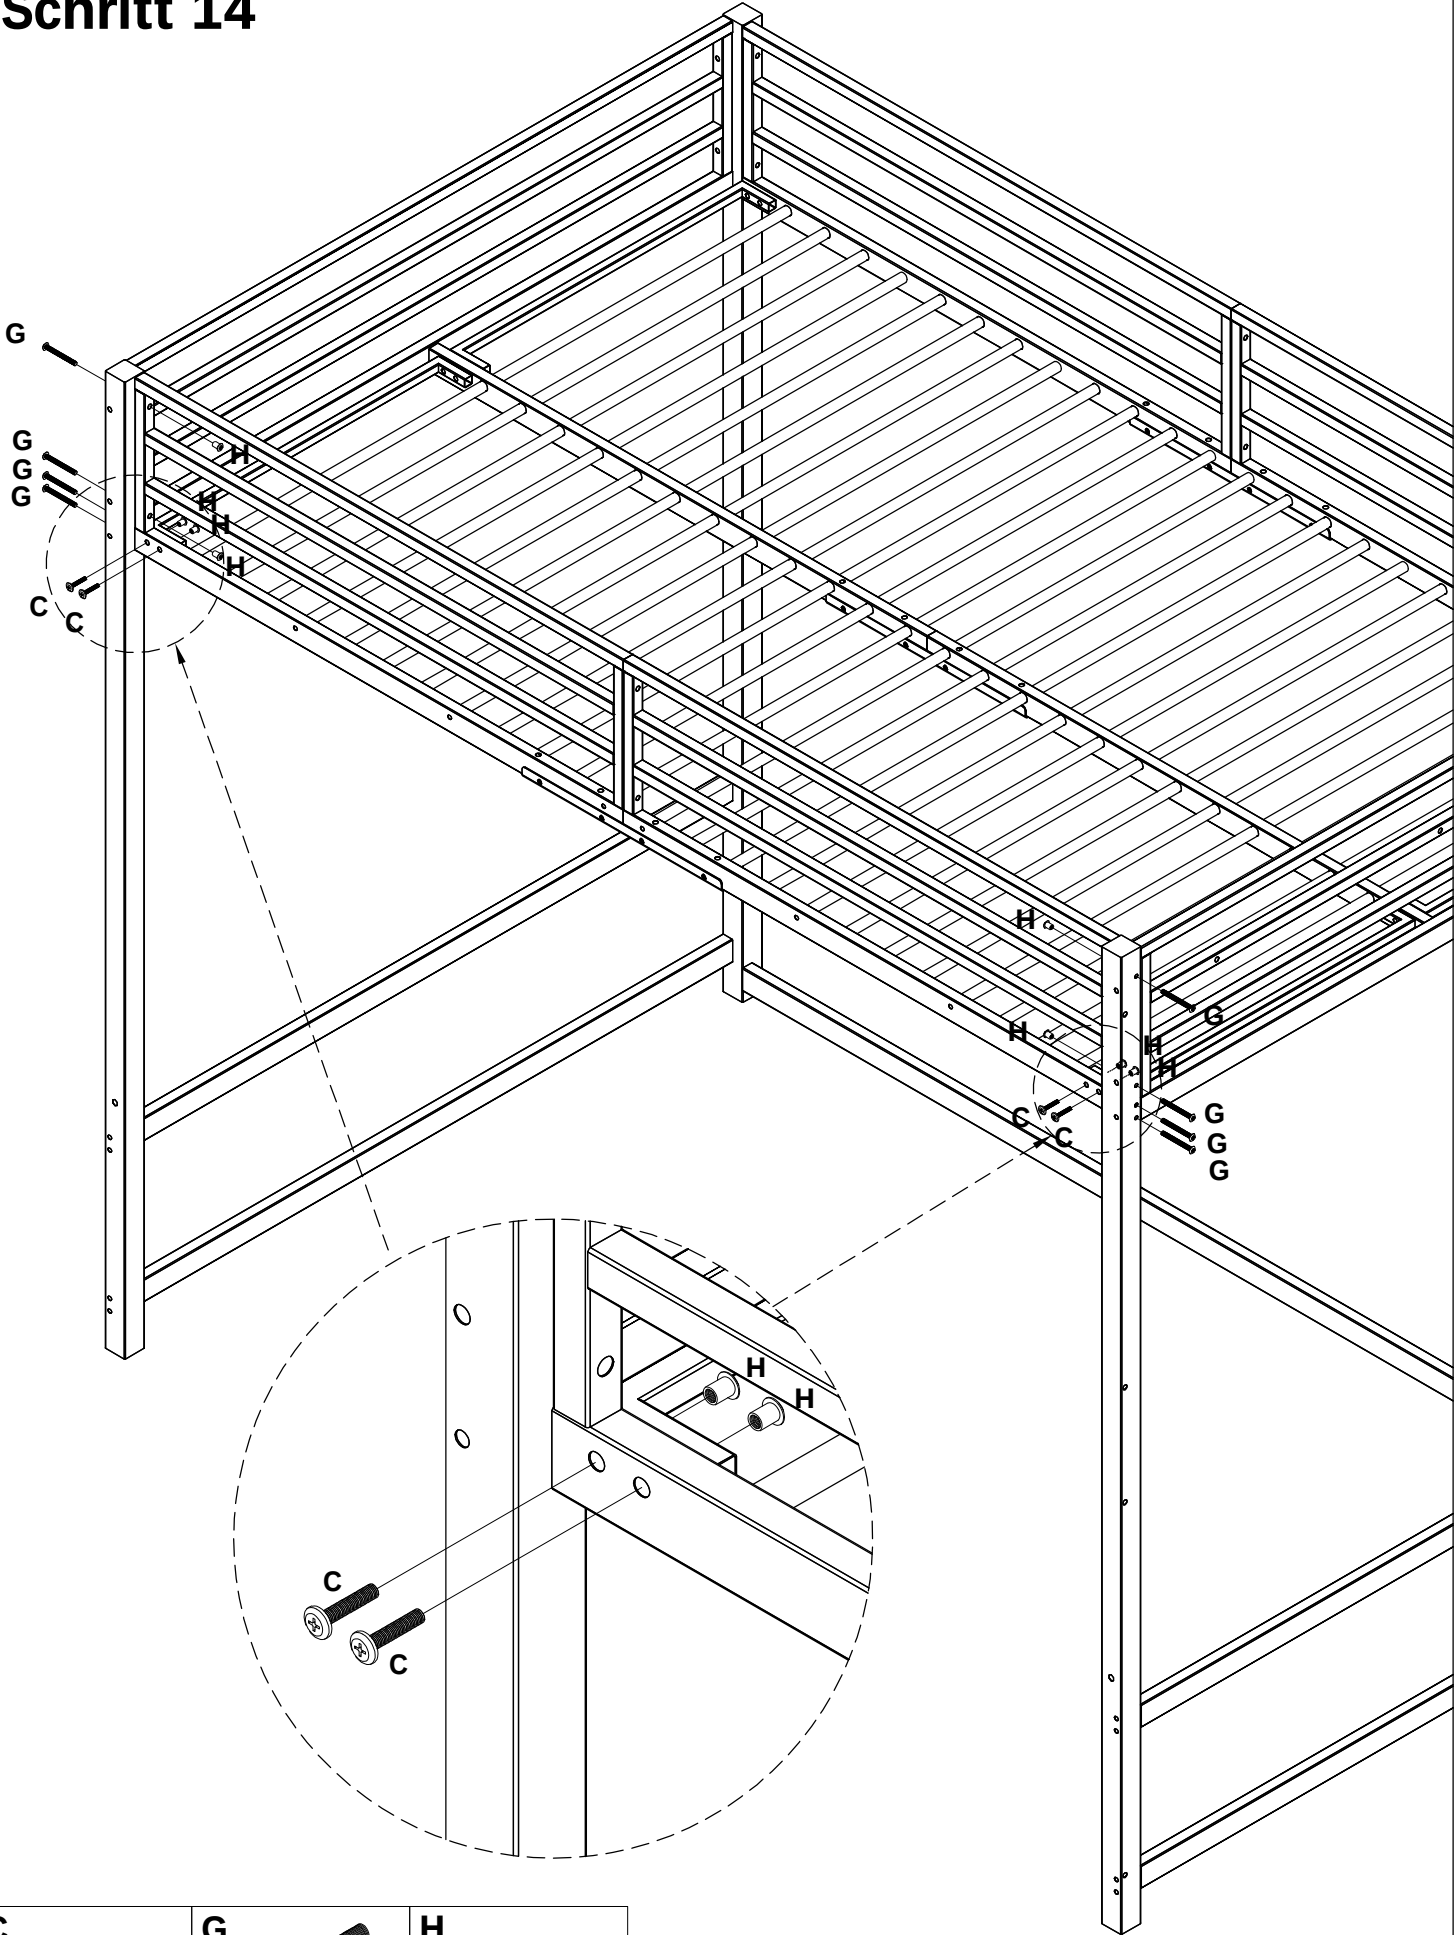

C 	G 	H 
M6x30MM 4PCS	M6x55MM 8PCS	M6x12MM 8PCS








Schritt 15

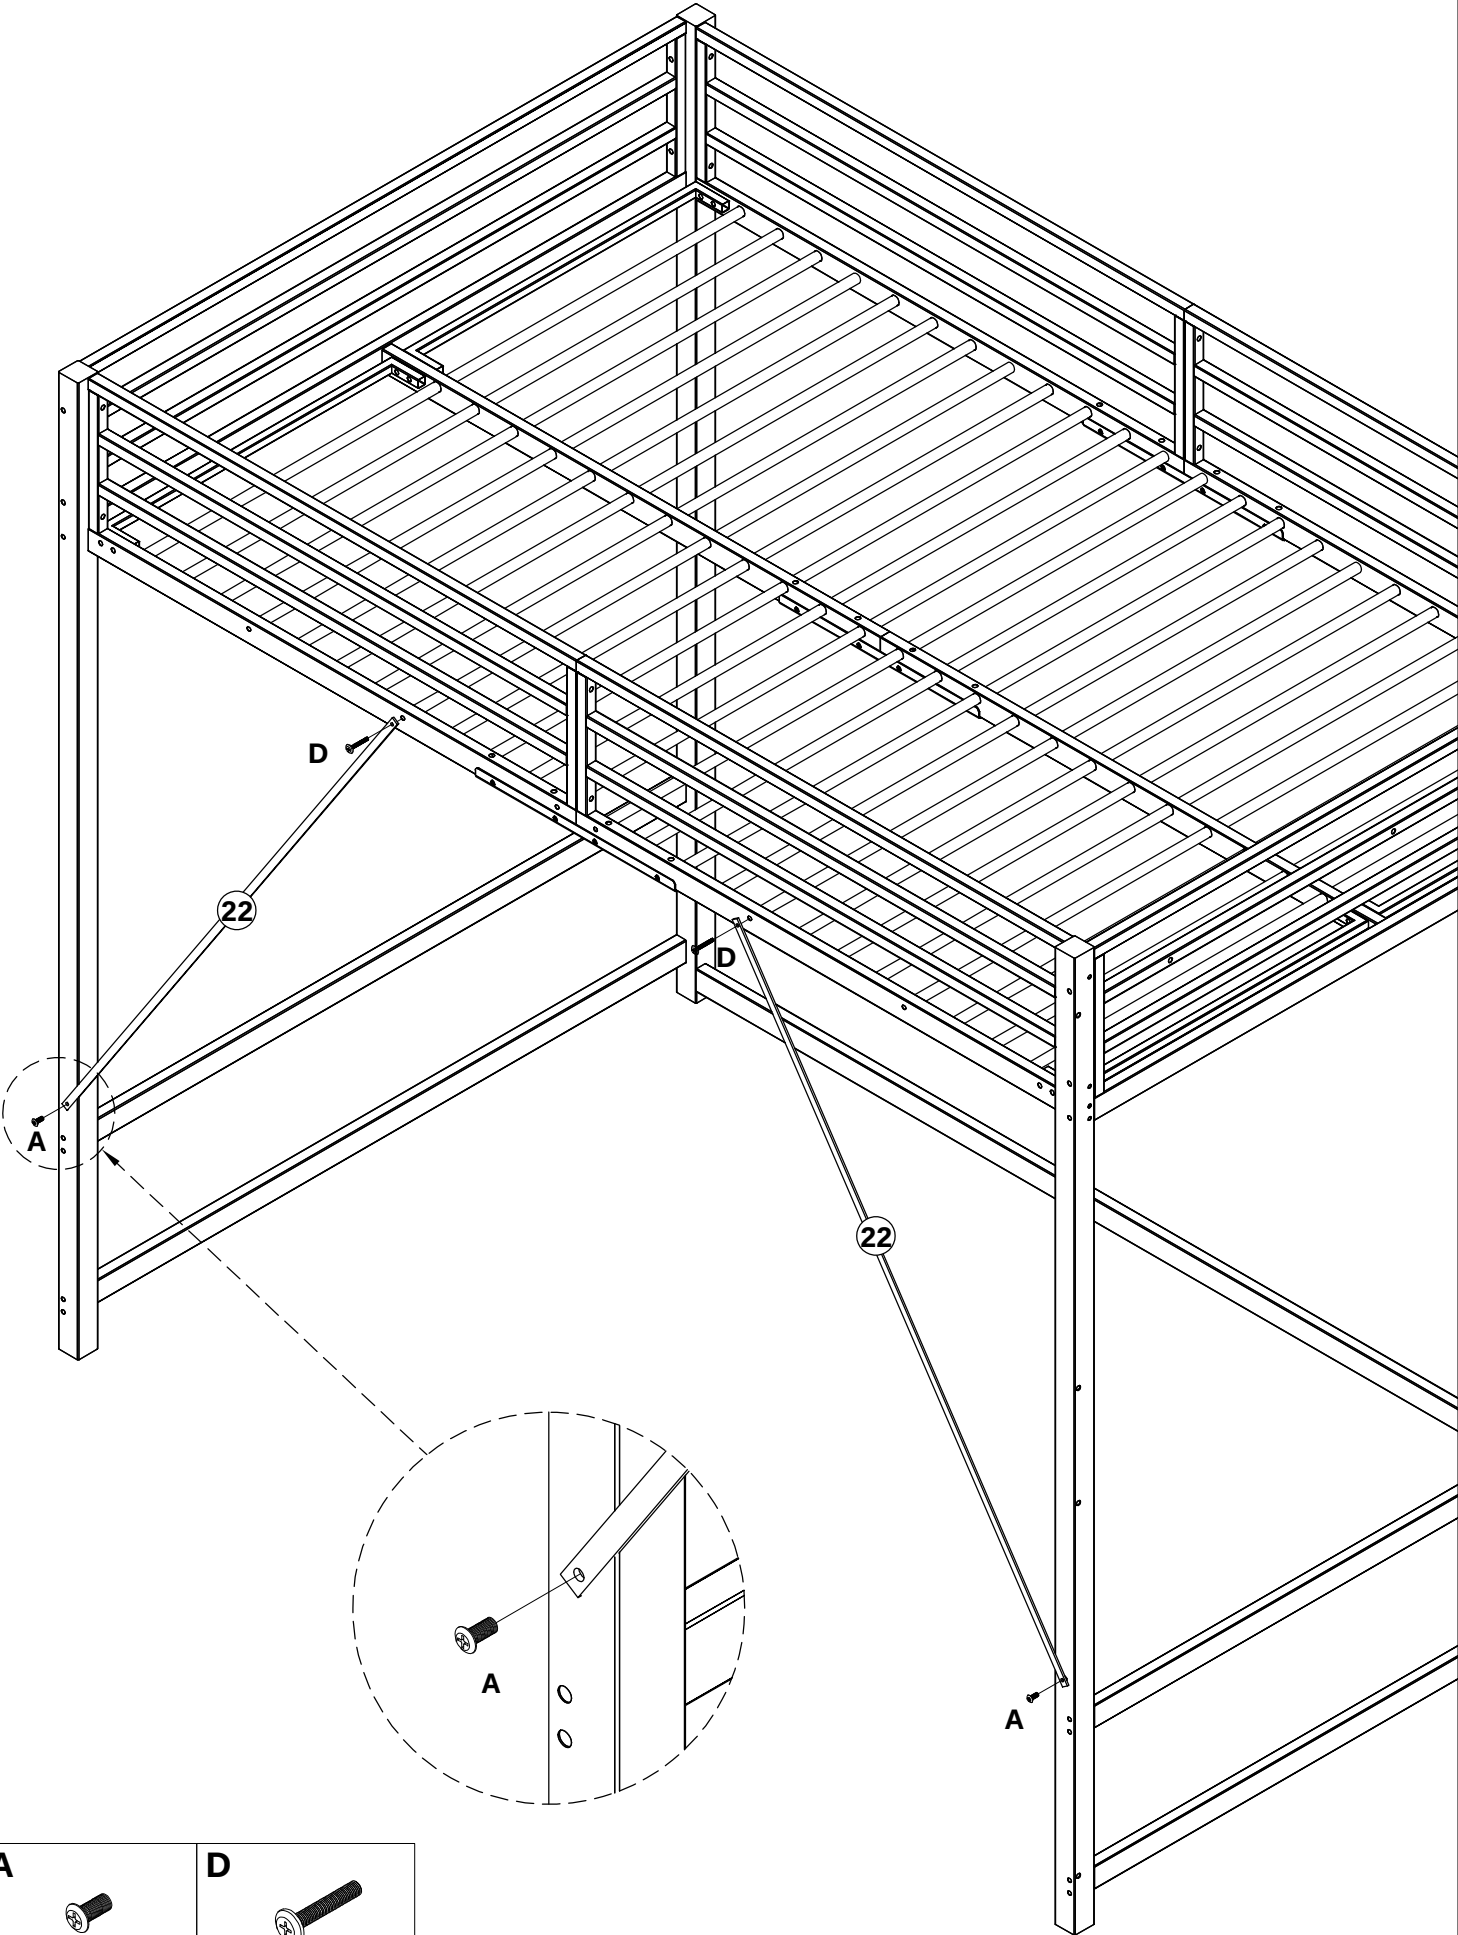

A		D	
M6x13MM	2PCS	M6x35MM	2PCS

Schritt 16

x 2

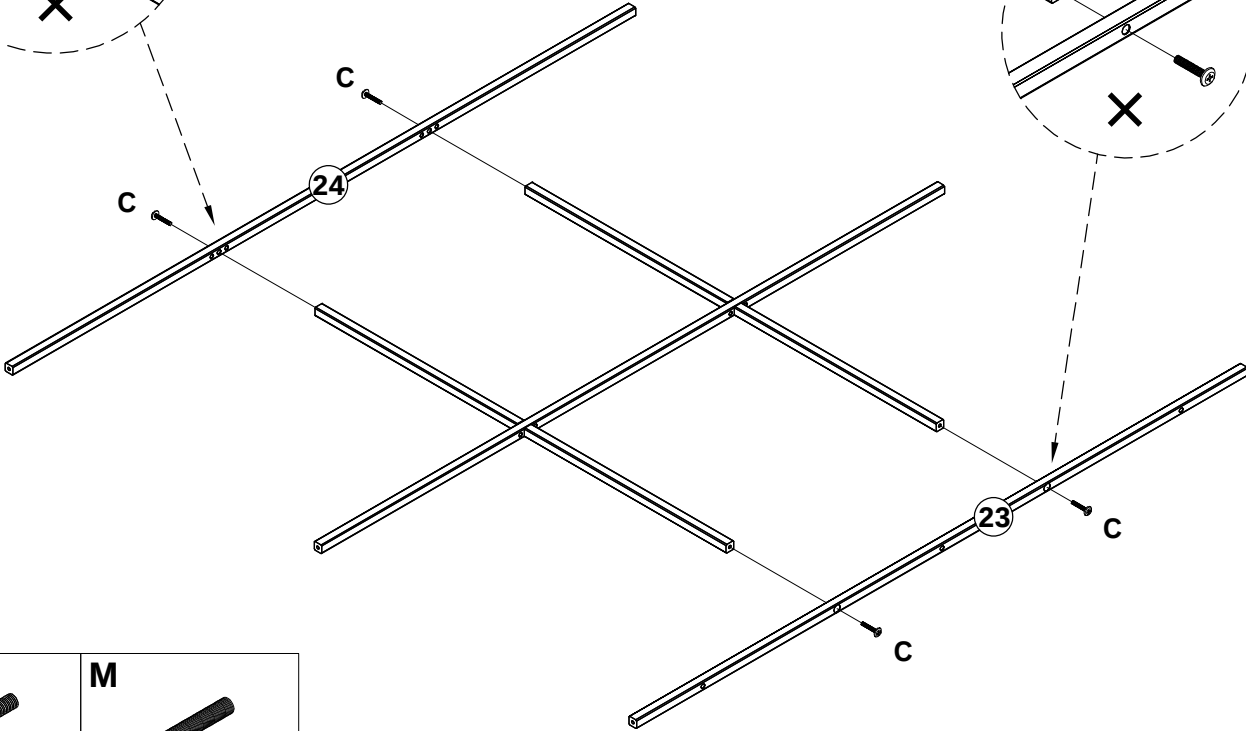
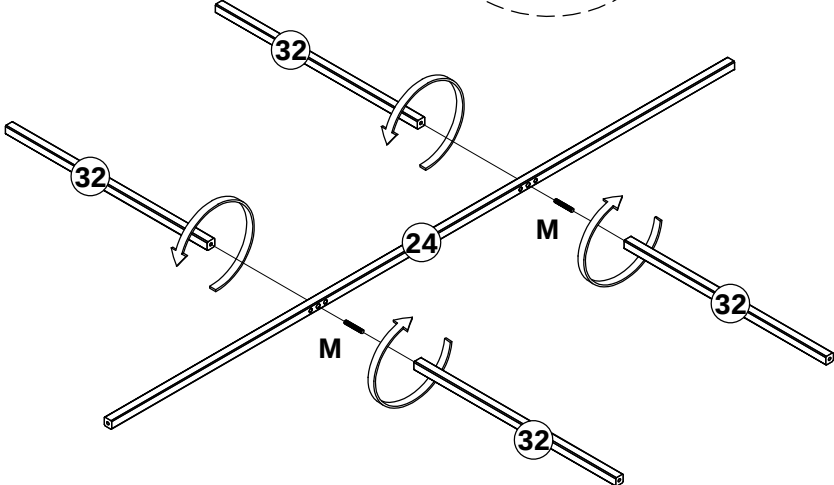



C	M
	
M6x30MM	M6x40MM
8PCS	4PCS

Schritt 17



back  front

Note: When installing component 38, install the front screw first, and then install the rear screw.

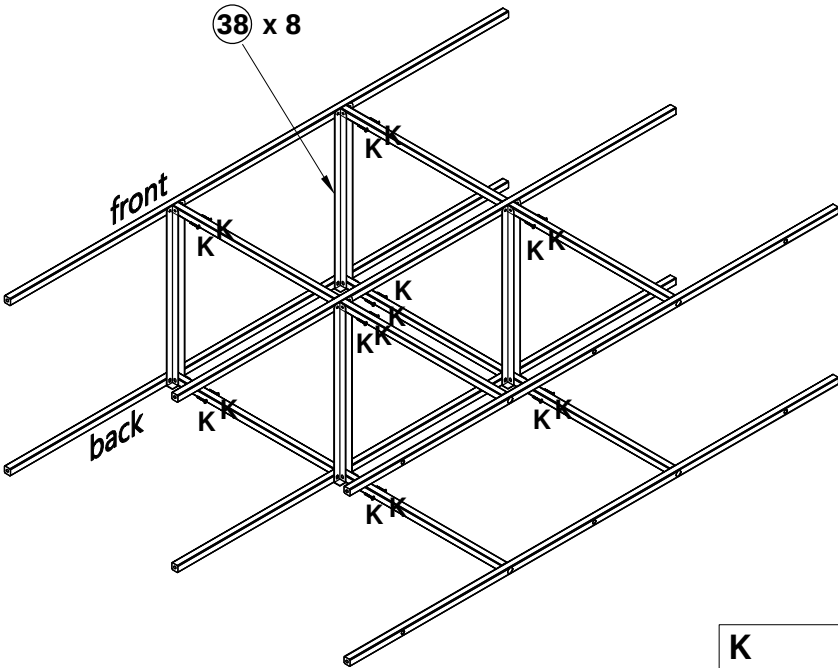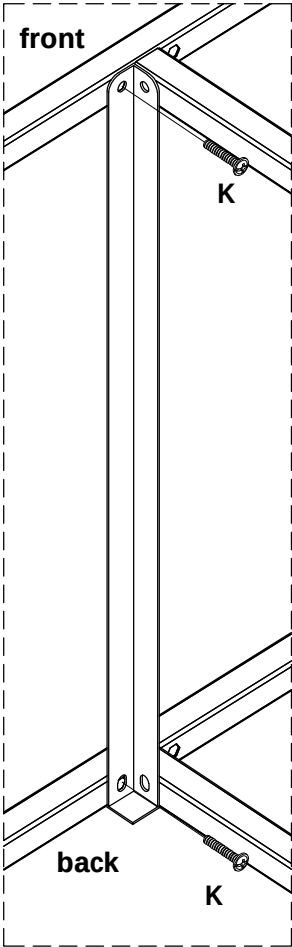


M4x13MM 16PCS

Schritt 18

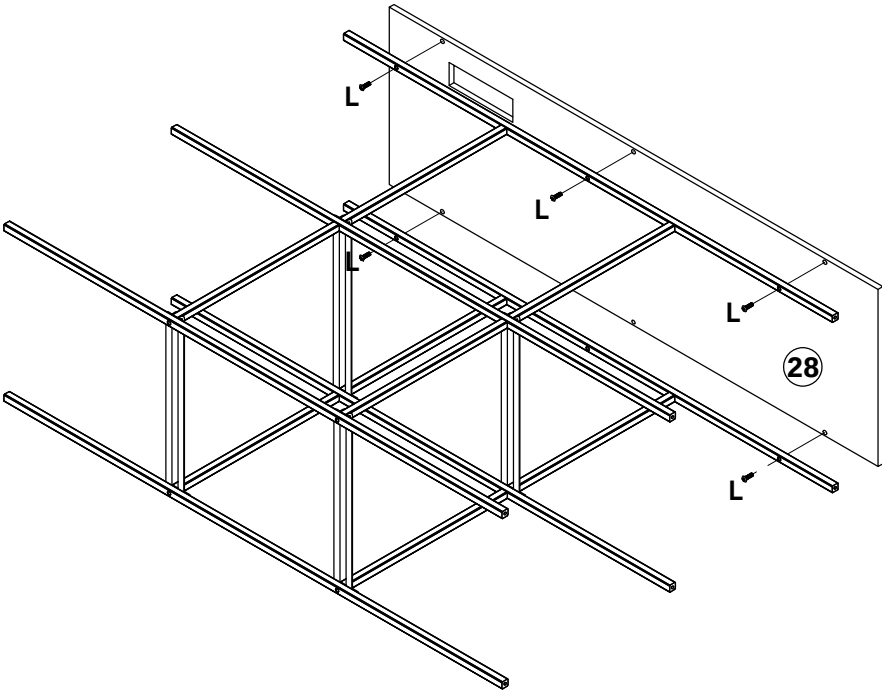


M6x20MM 5PCS

Schritt 19

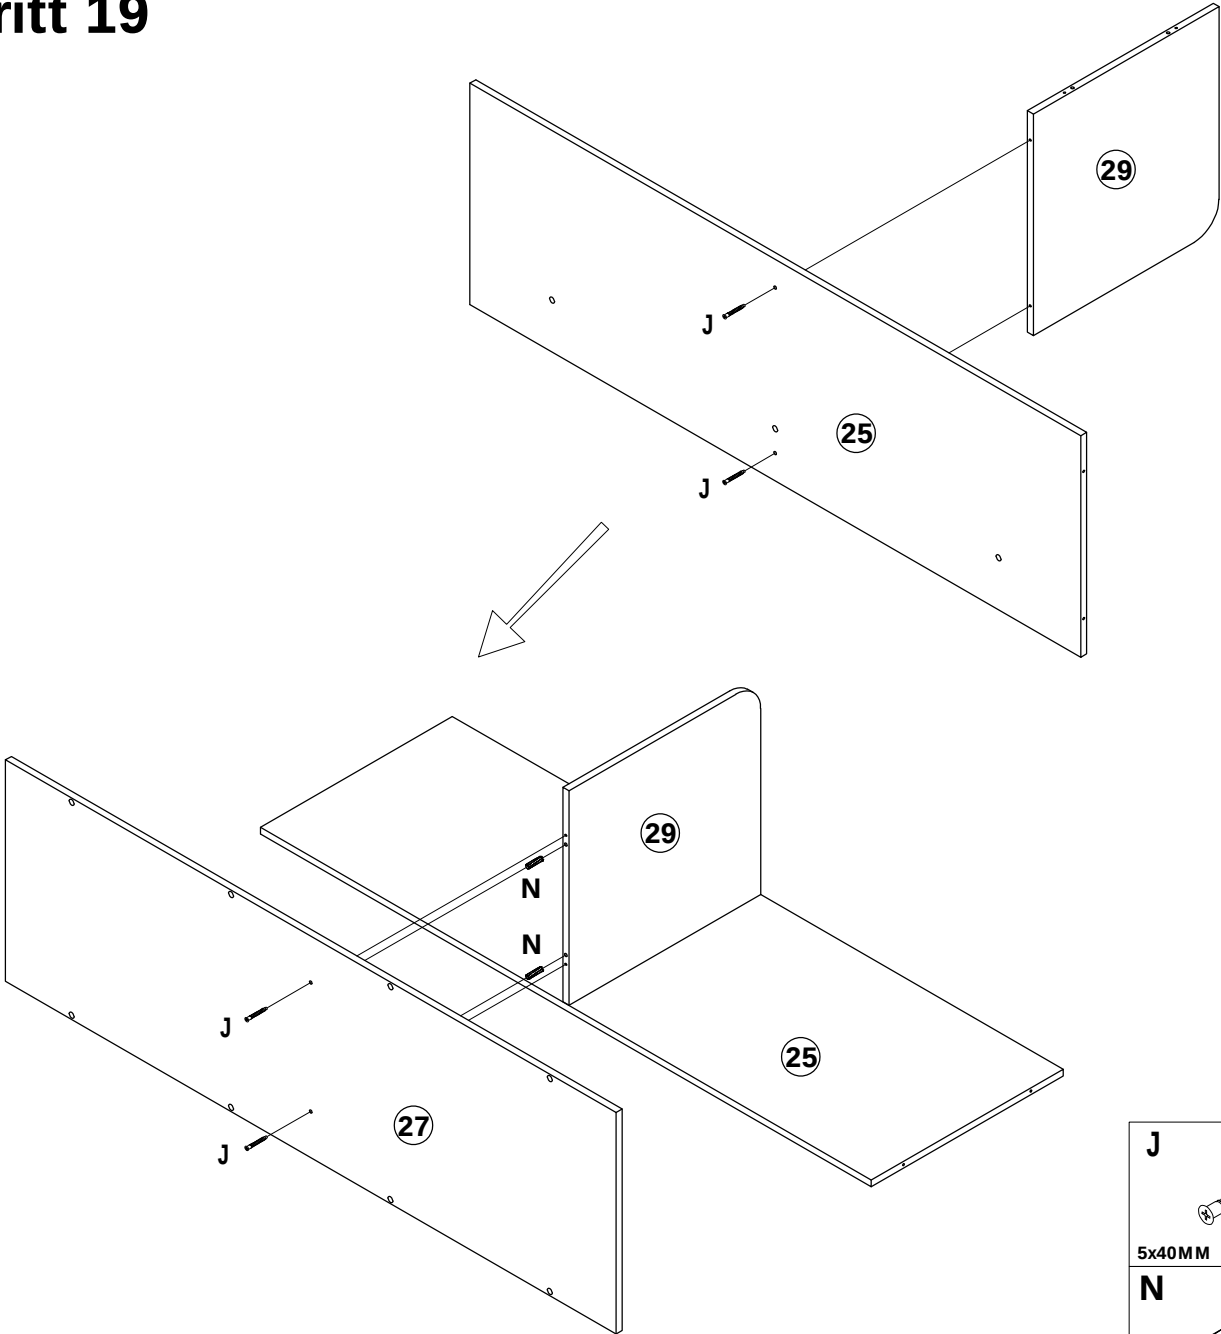



J	
5x40MM	4PCS
N	
Φ6x30MM	2PCS

Schritt 20


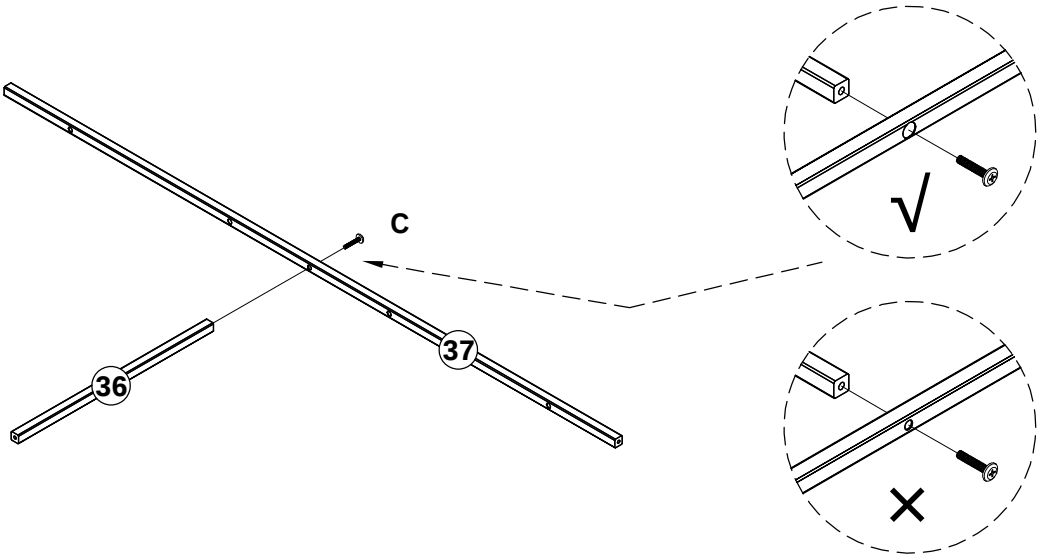


C	
M6x30MM	1PC


Schritt 21

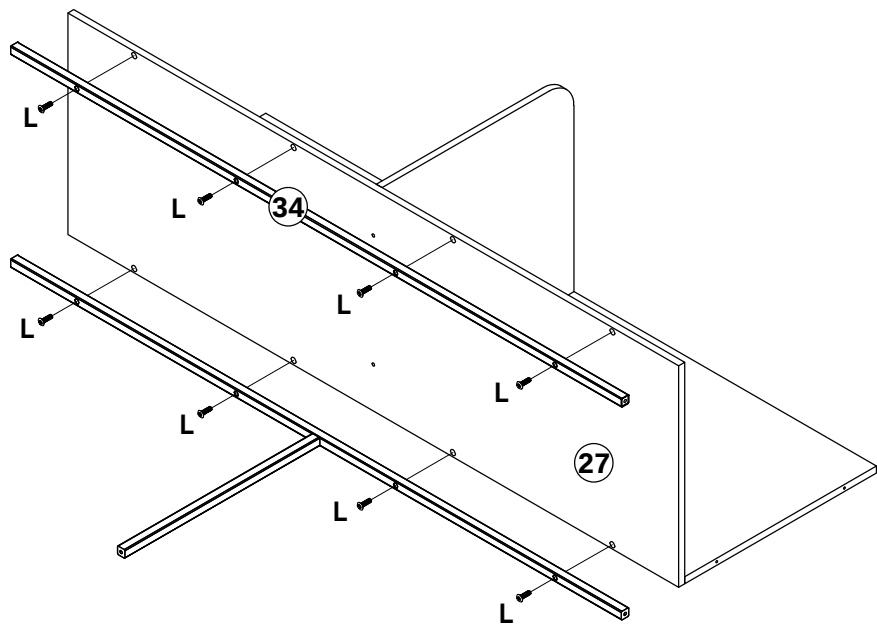


Schritt 22

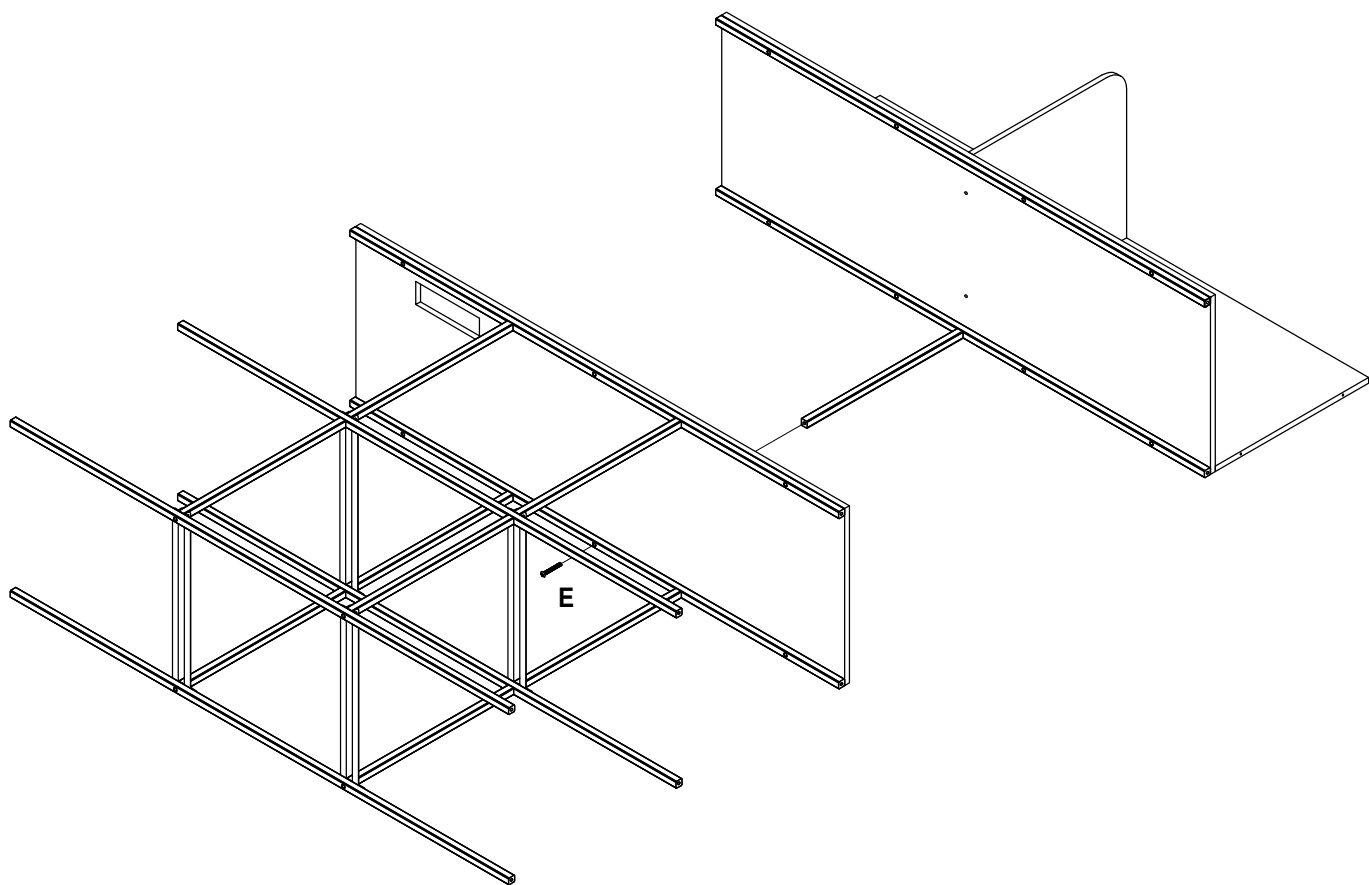

Schritt 23


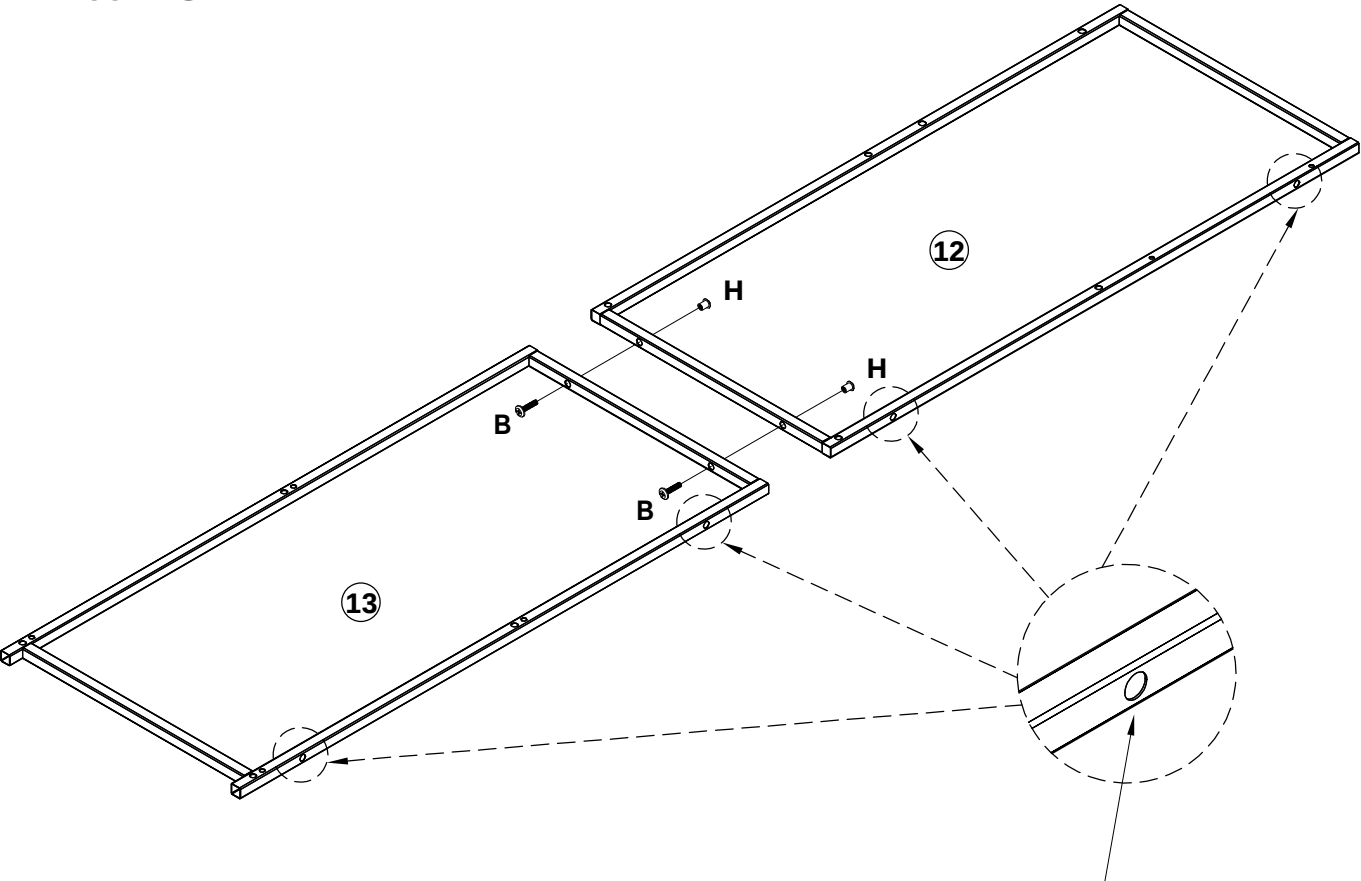


During installation, pay special attention to keeping these four holes in the same direction.

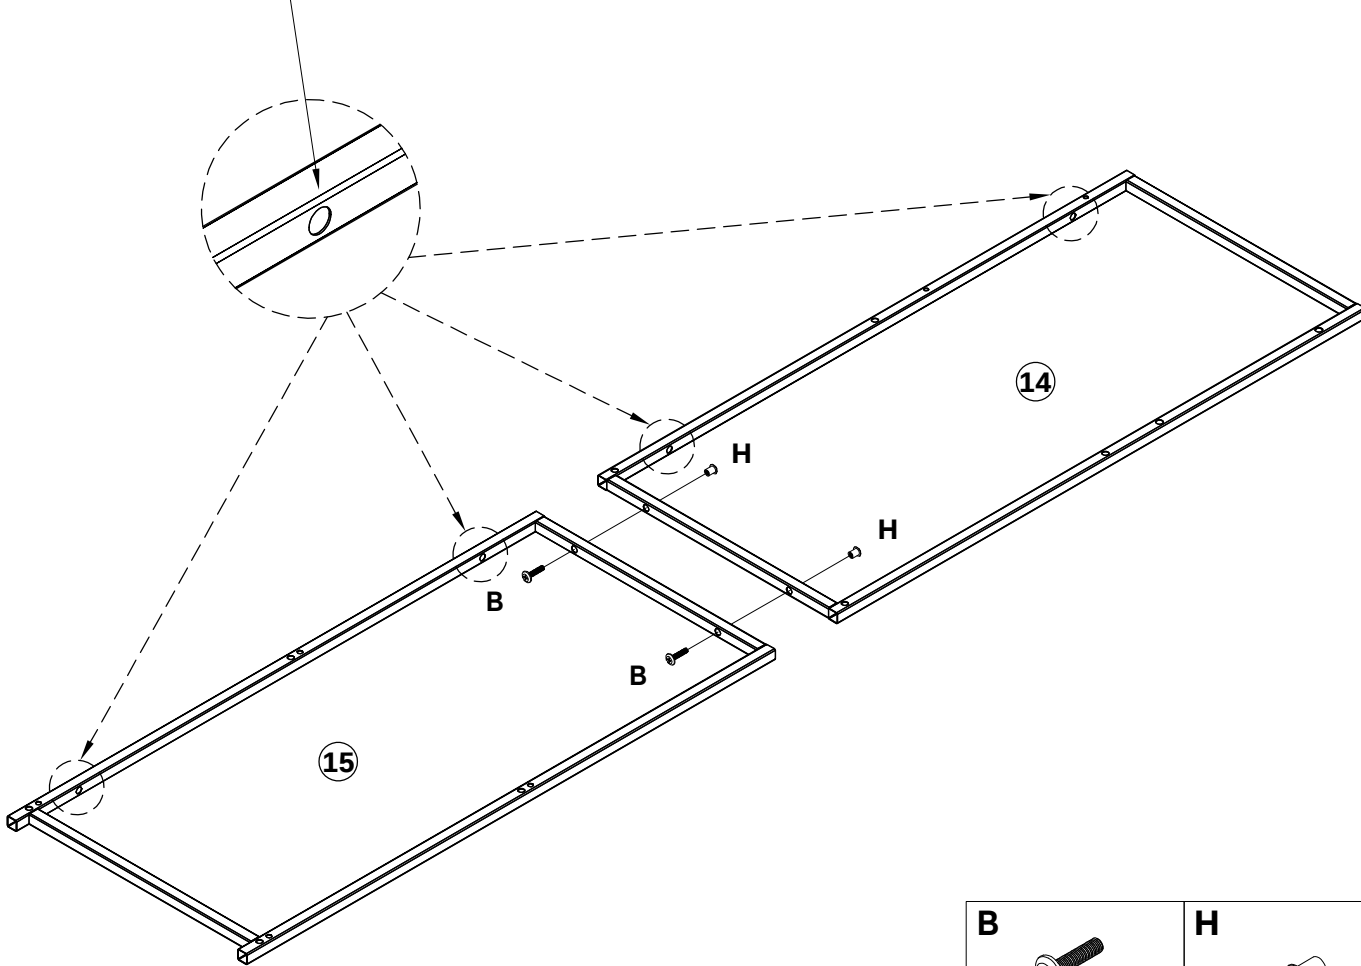



B		H	
M6x25MM	4PCS	M6x12MM	4PCS

Schritt 24

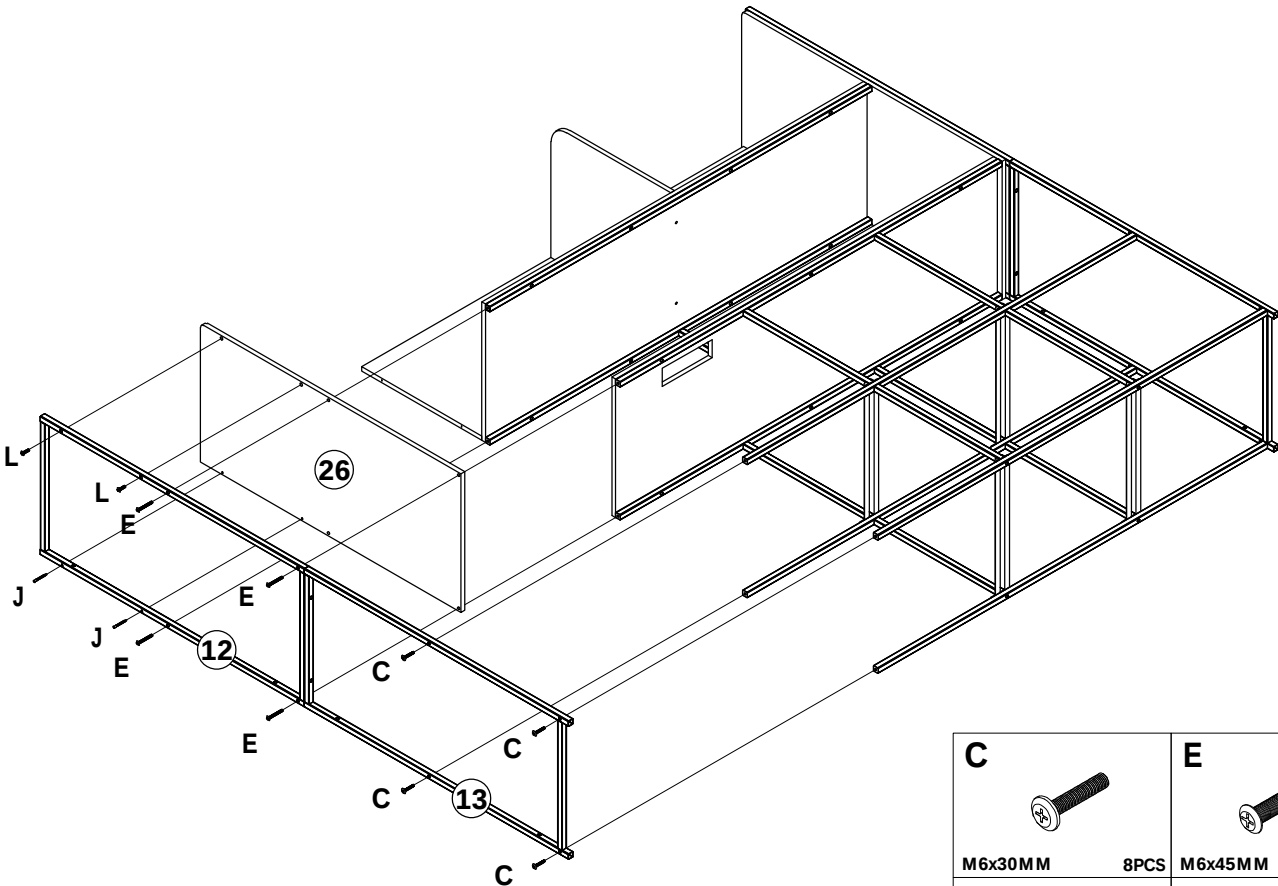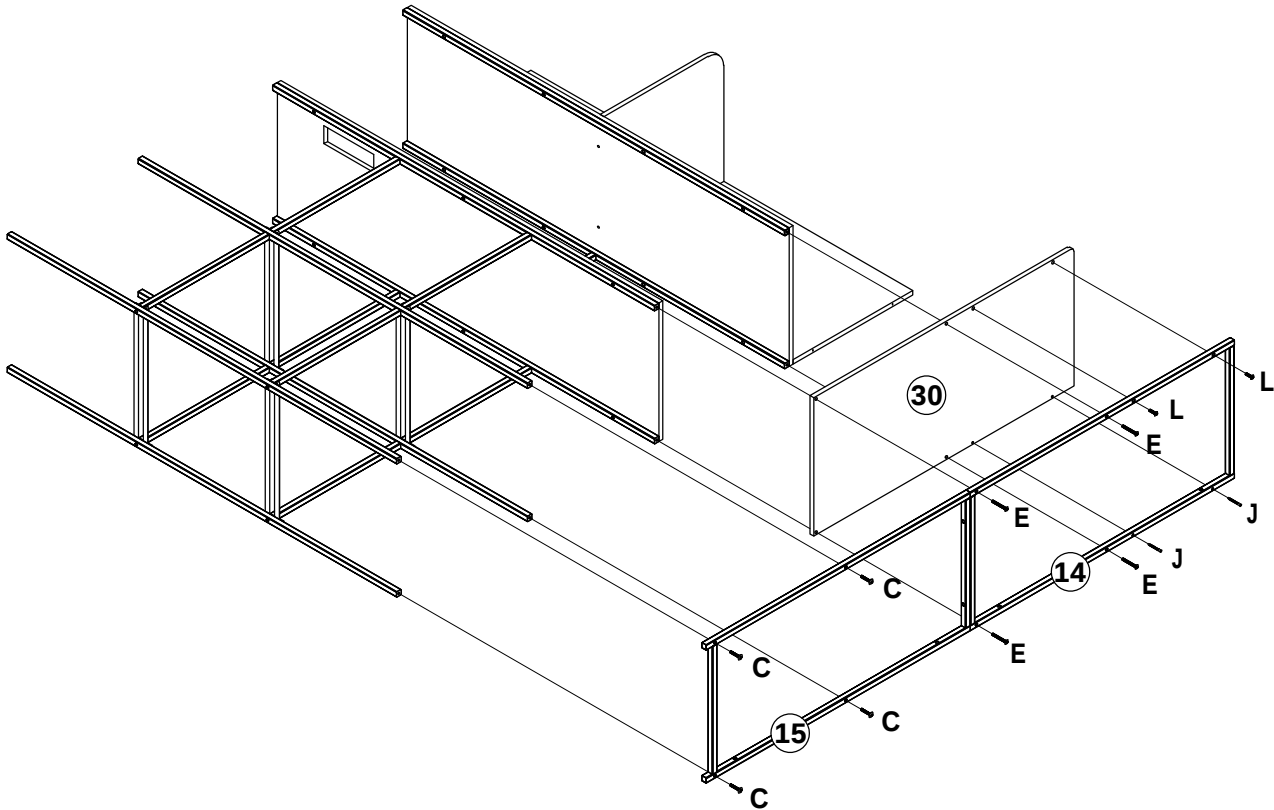

C  M6x30MM 8PCS	E  M6x45MM 8PCS
J  5x40MM 4PCS	L  M6x20MM 4PCS

Schritt 25

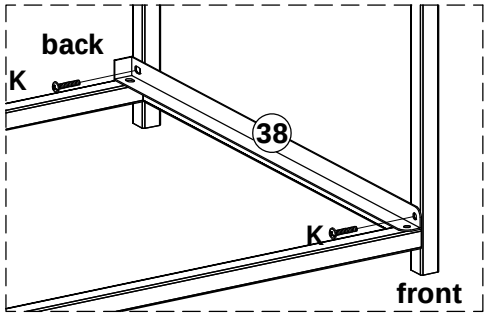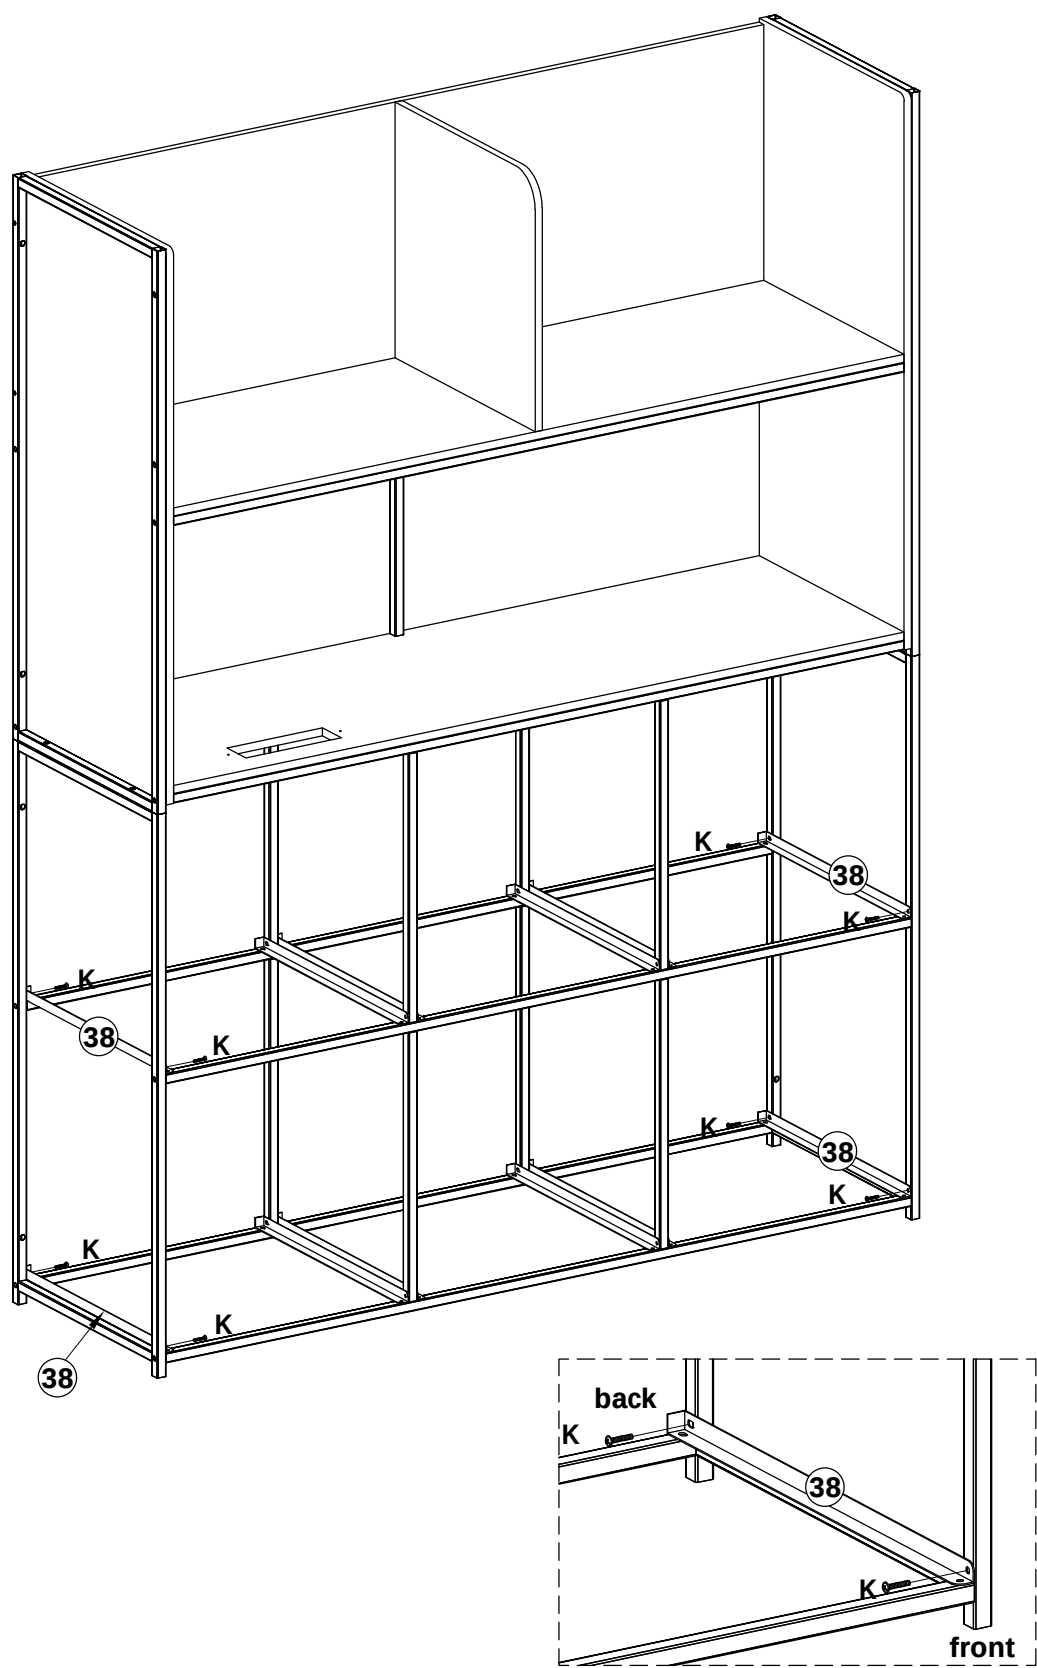

K




M4x13MM

8PCS

back  38  front


Note: When installing component 38, install the front screw first, and then install the rear screw.

Schritt 26

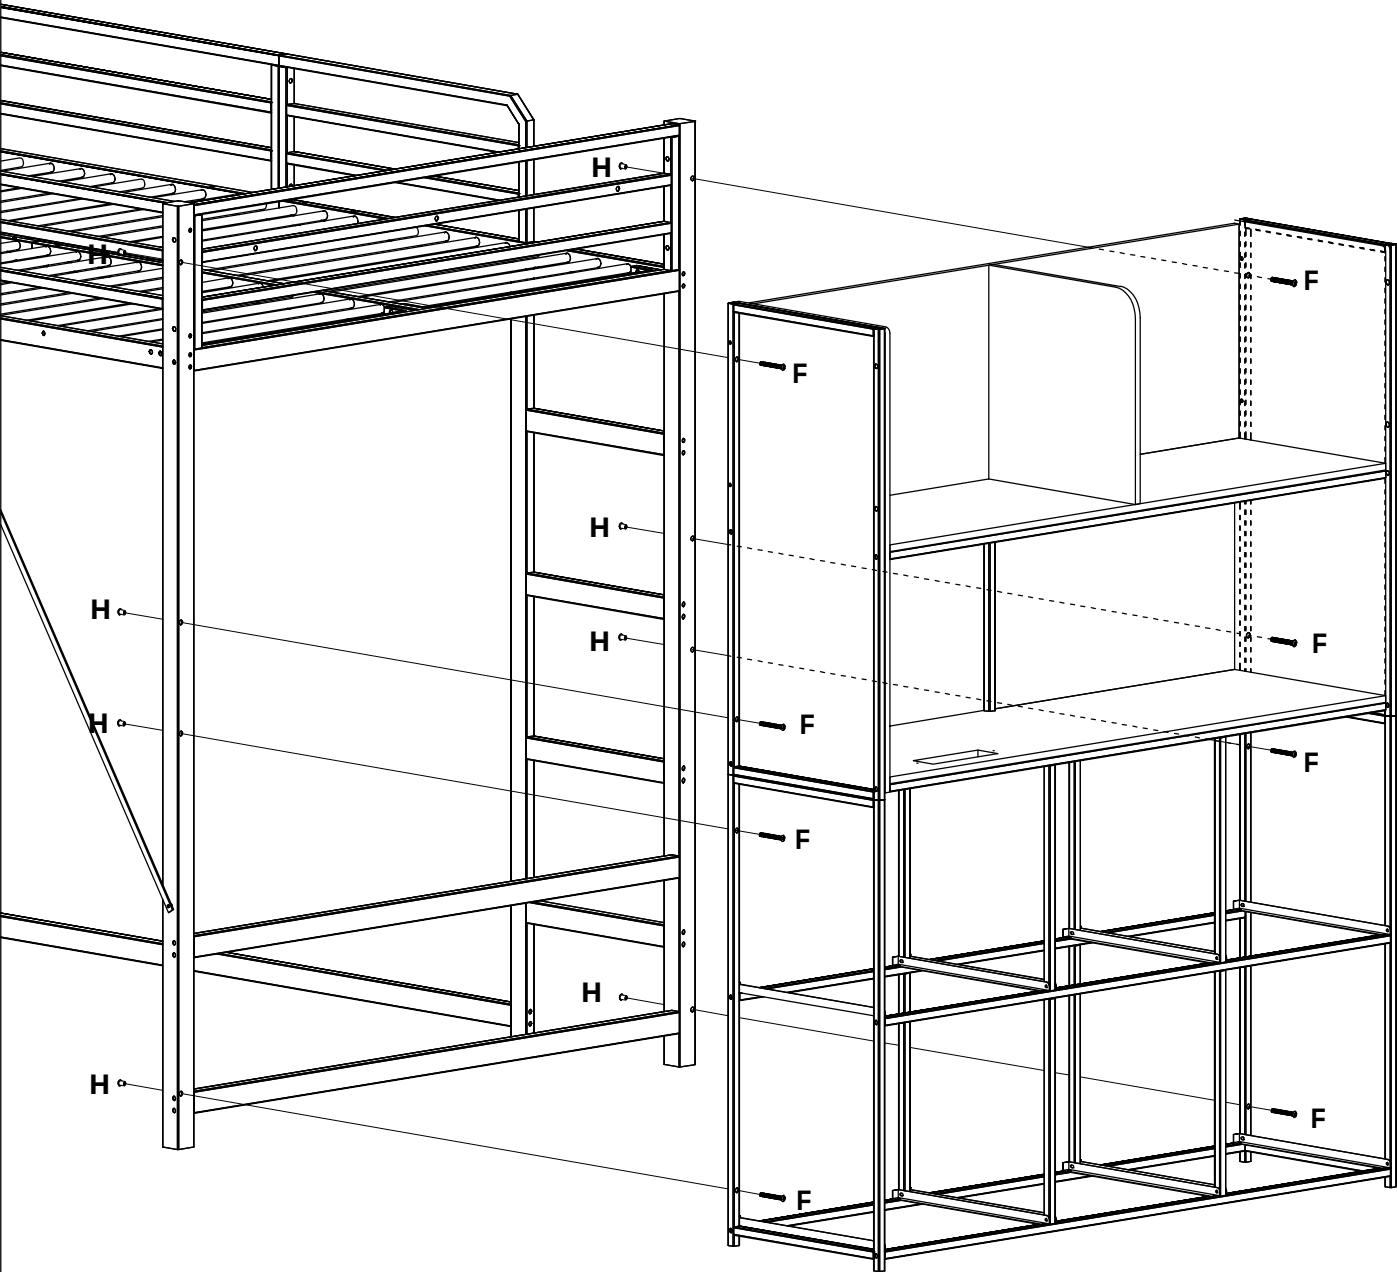

F		H	
M6x50MM	8PCS	M6x12MM	8PCS

Schritt 27

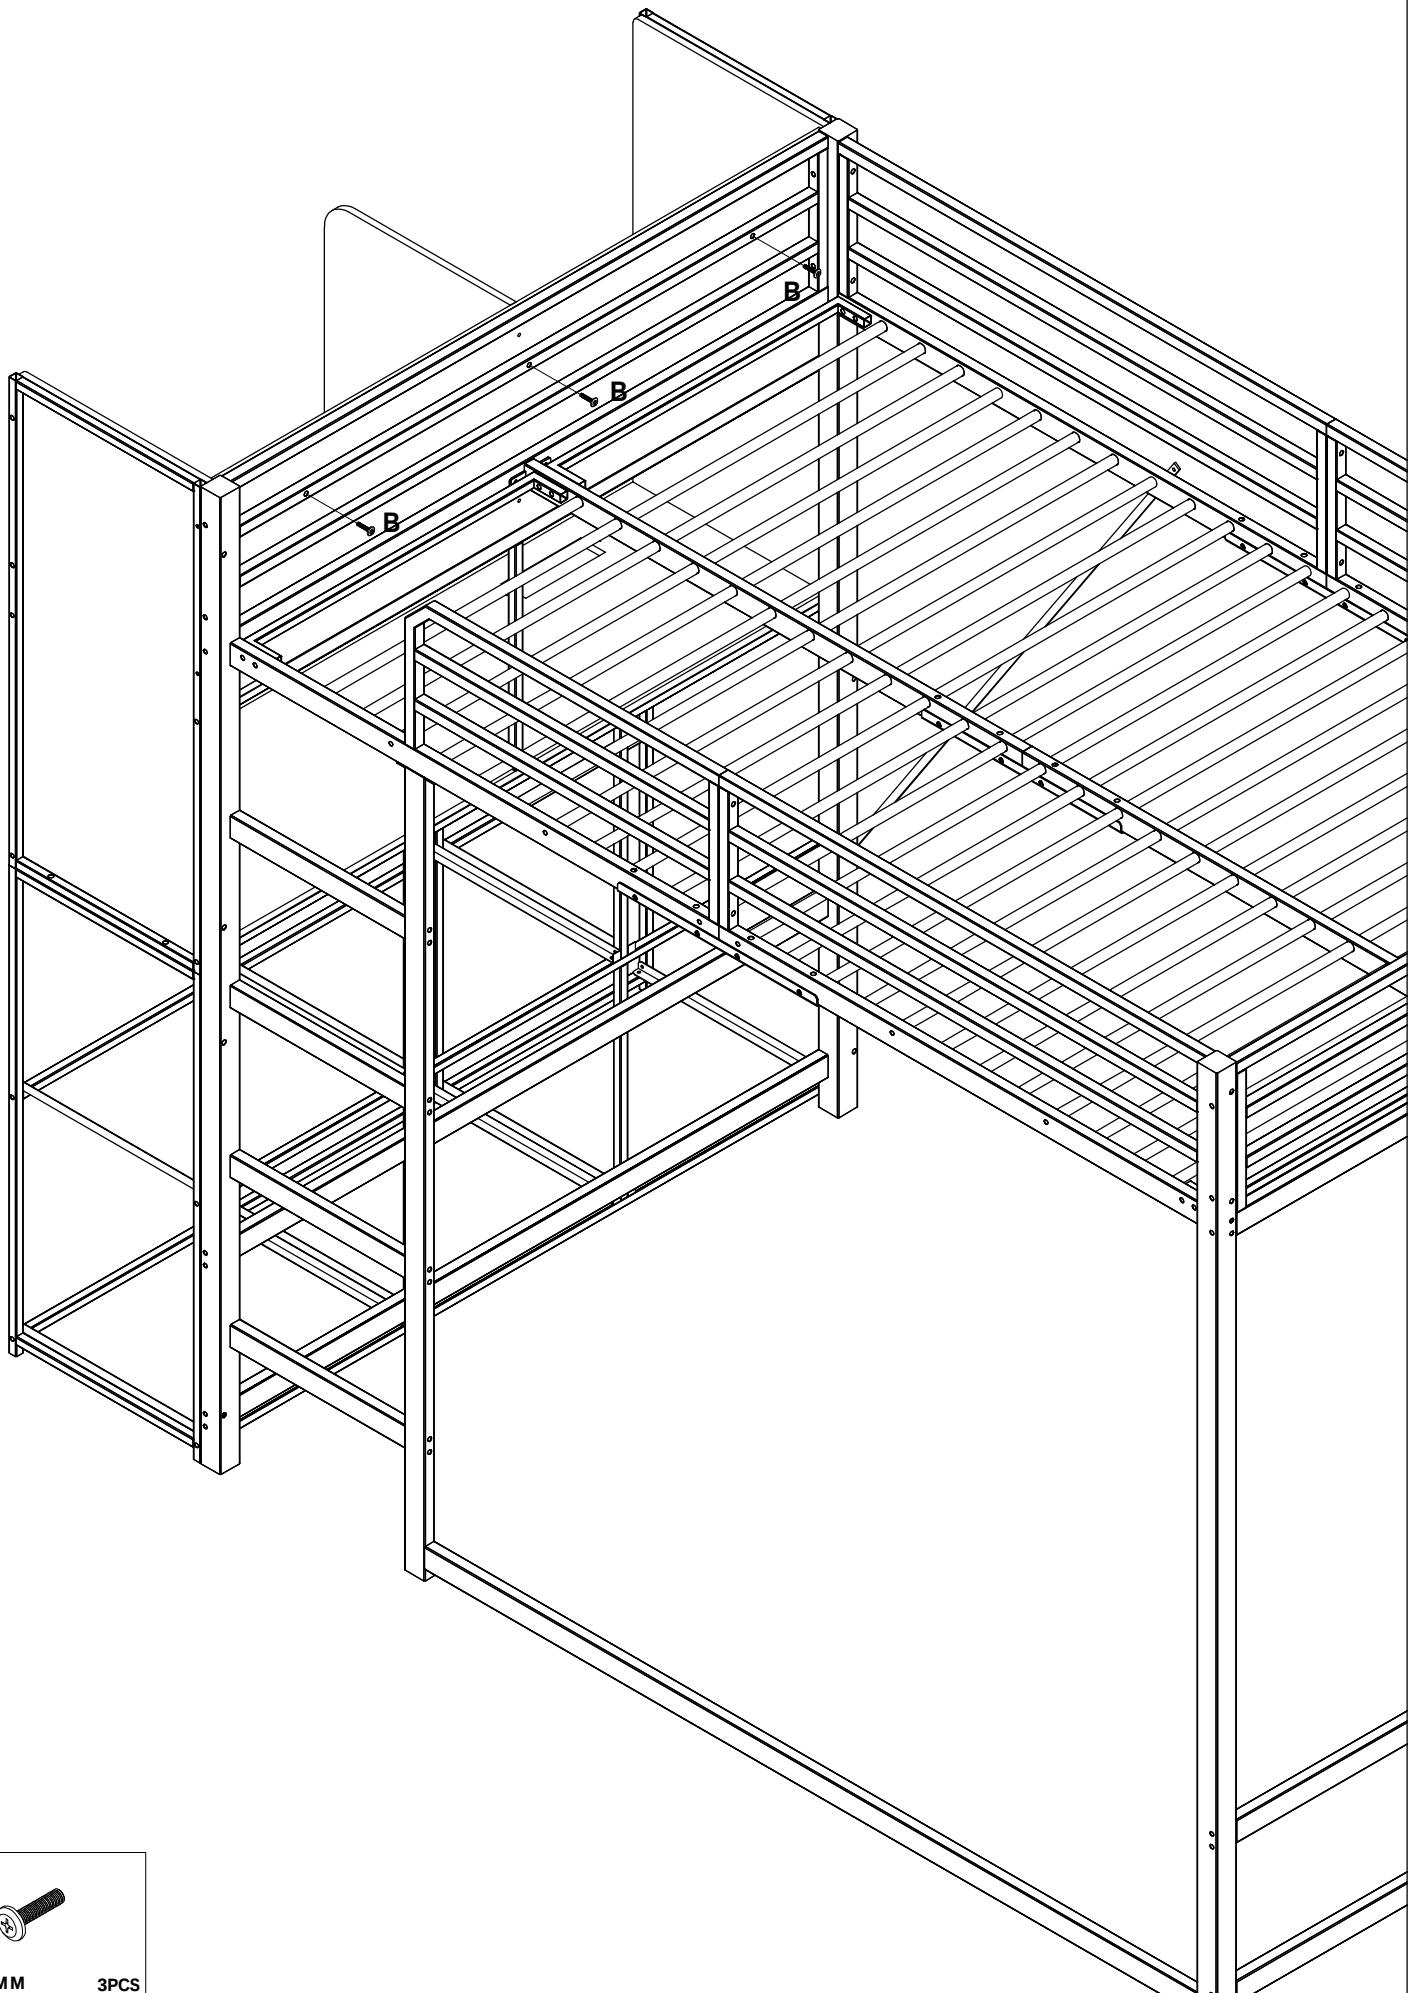




B




M6x25MM

3PCS


Schritt 28

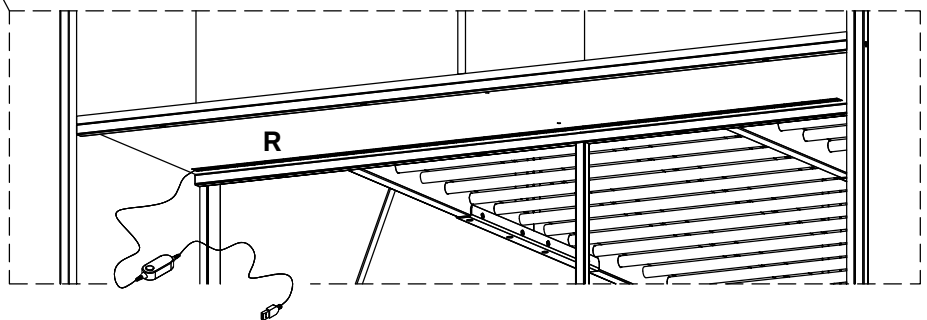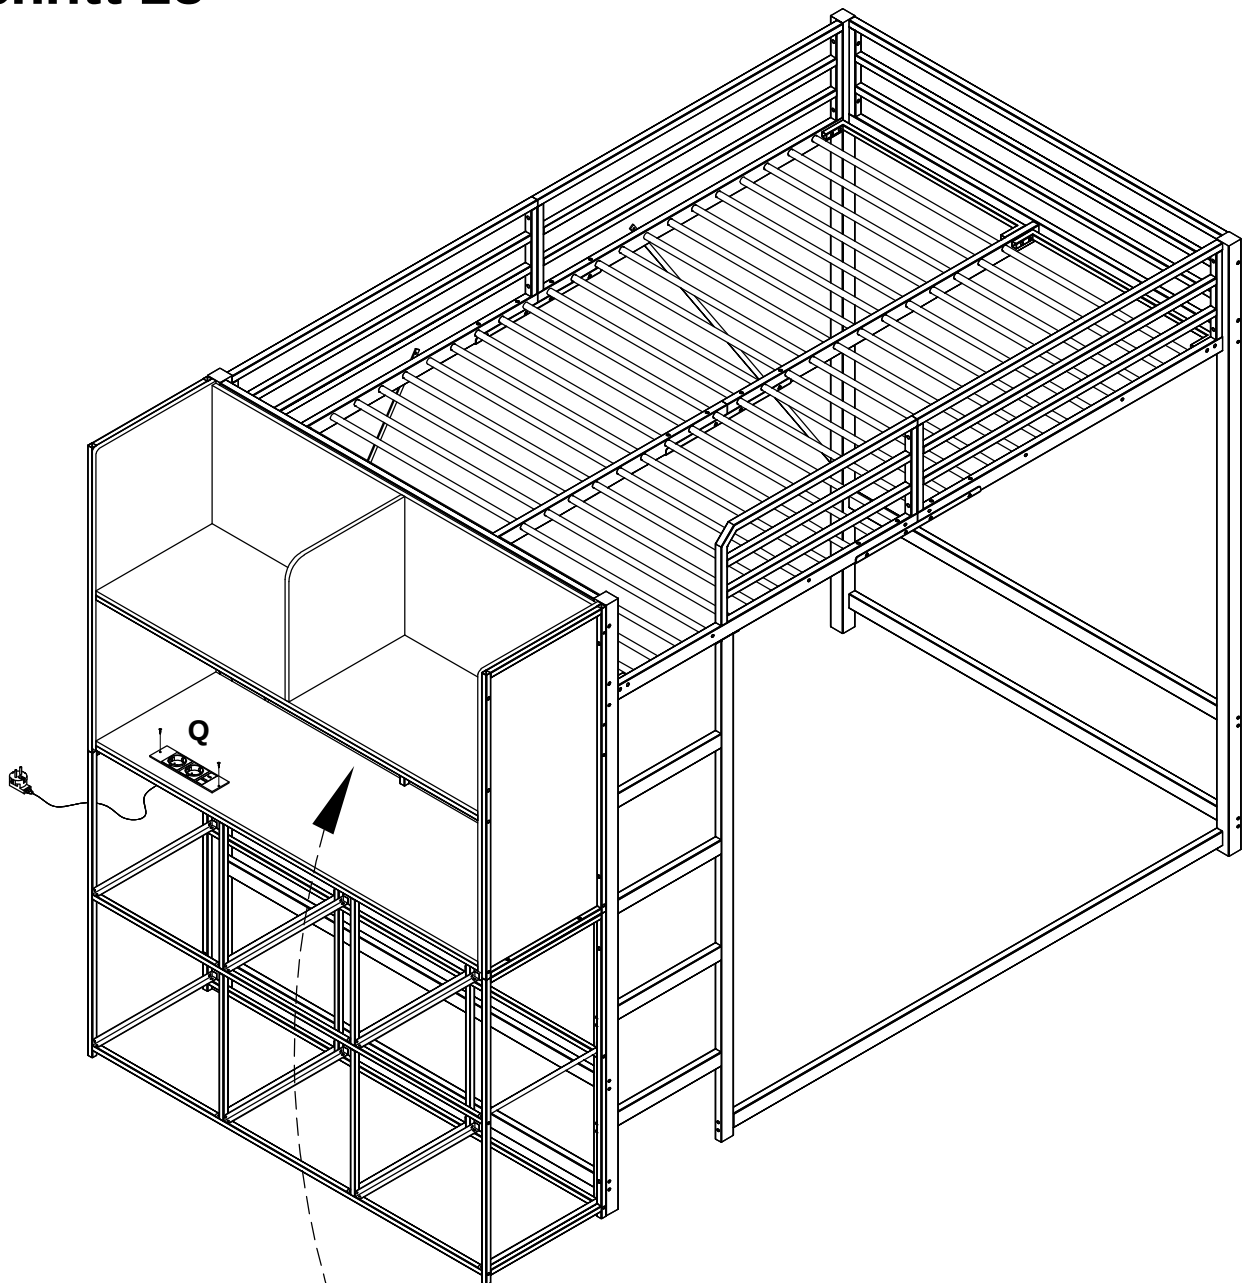


Schritt 29

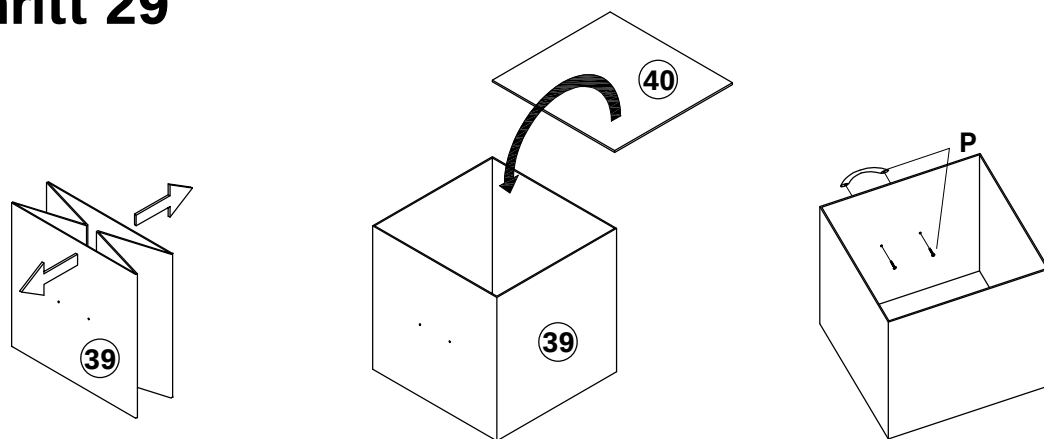



x 6



Schritt 30

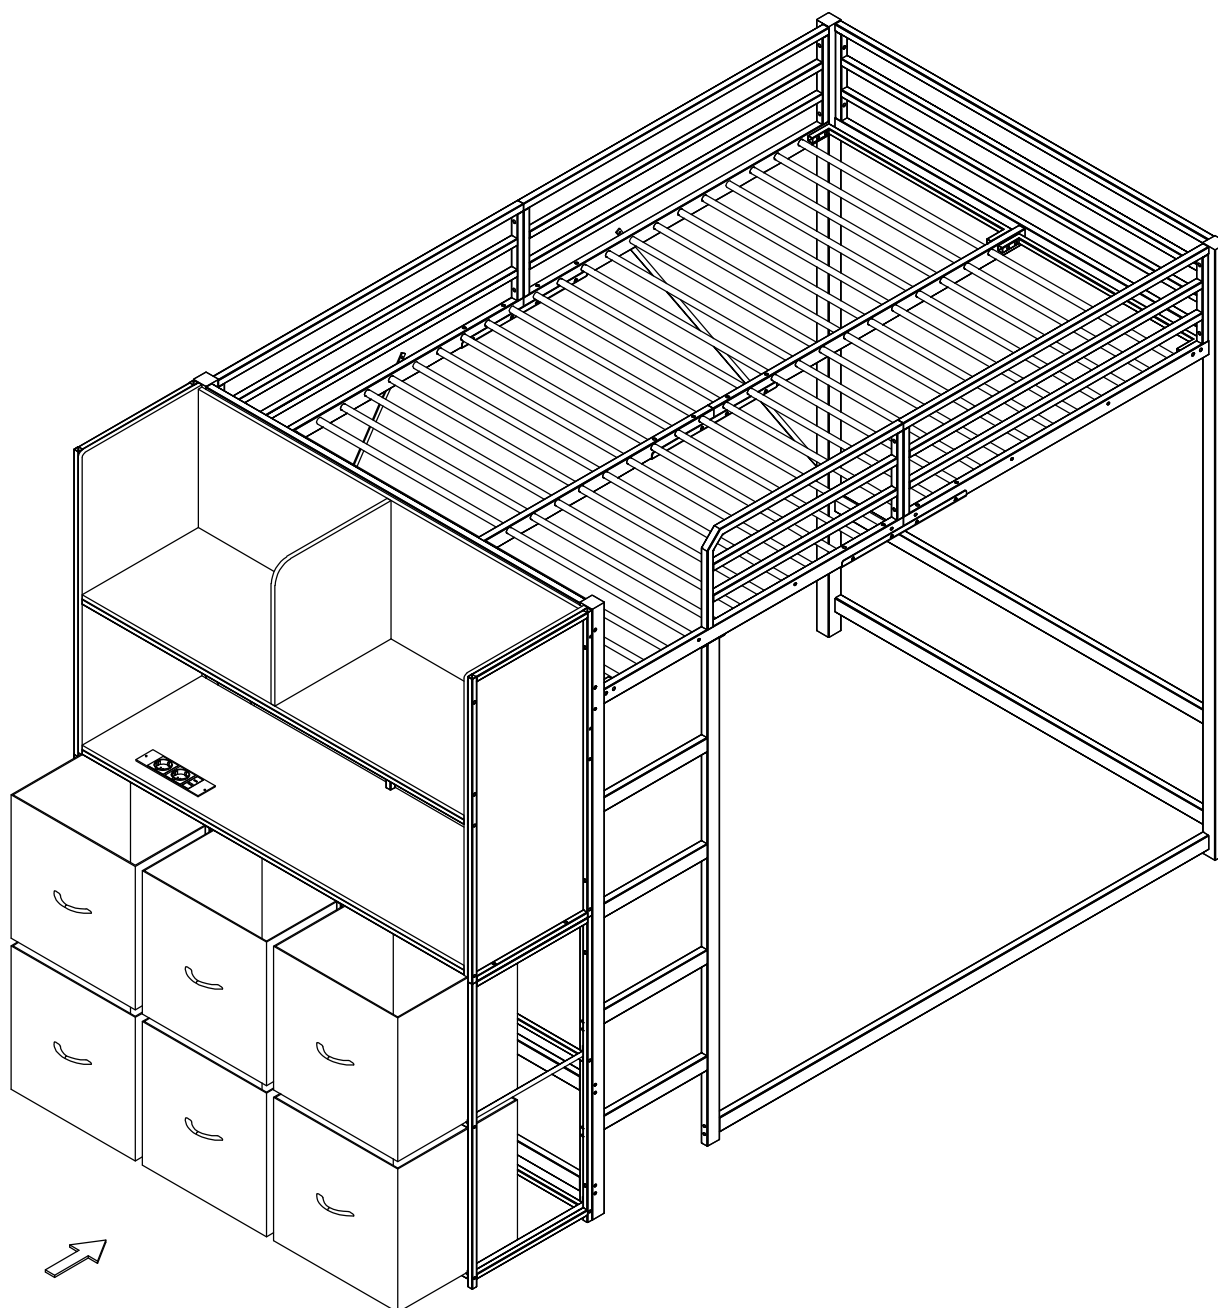

Schritt 31

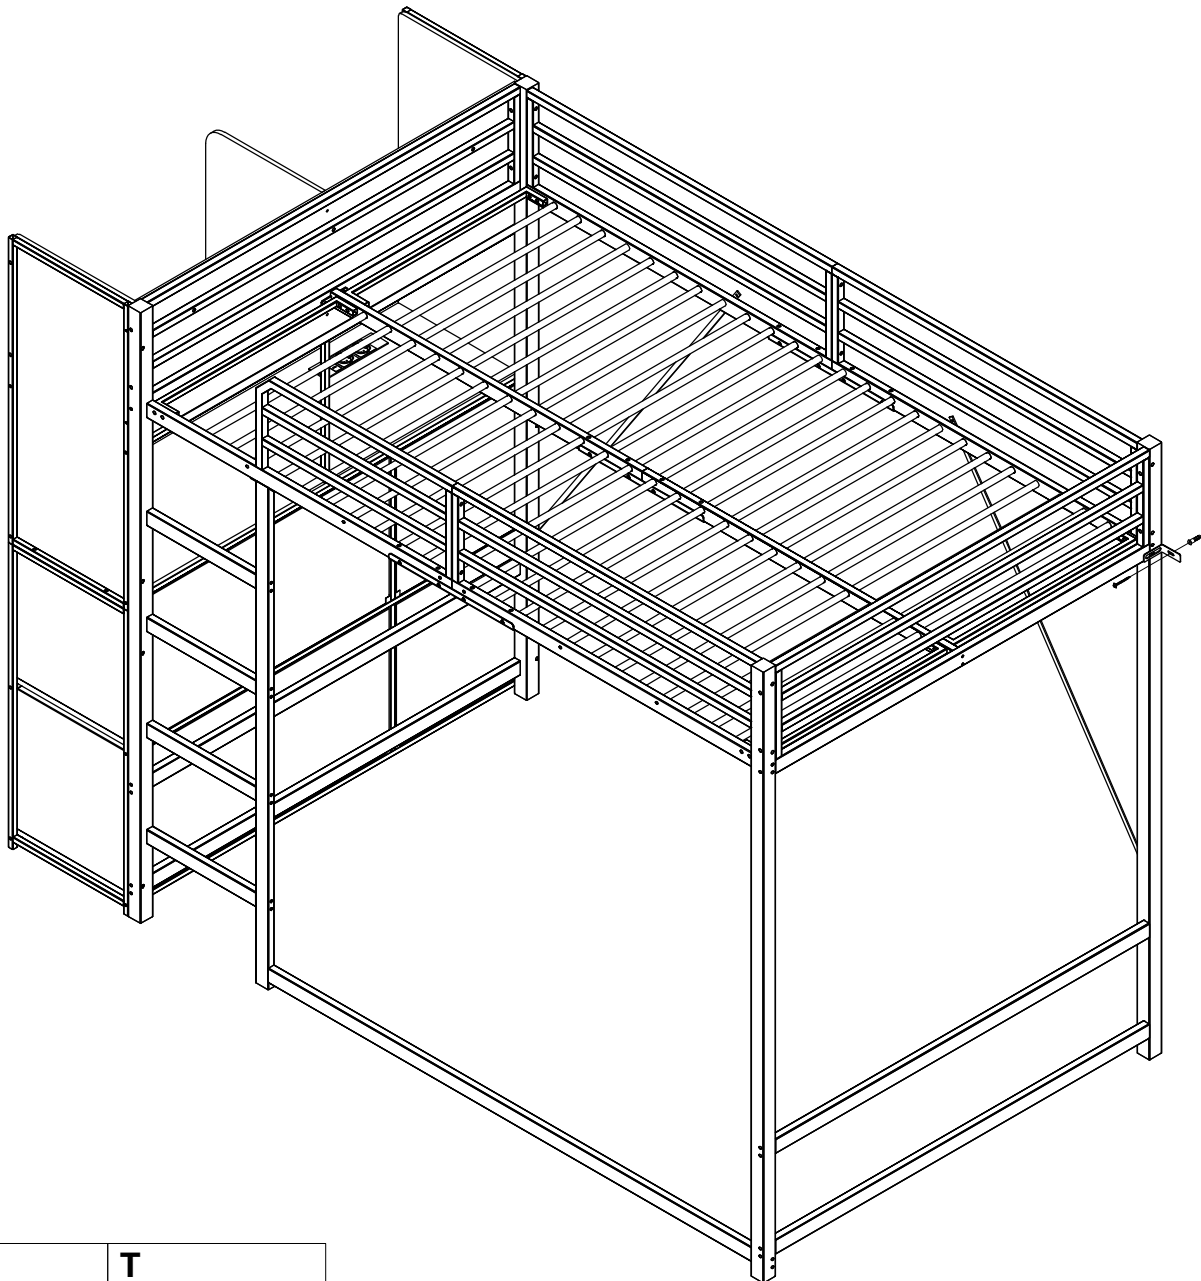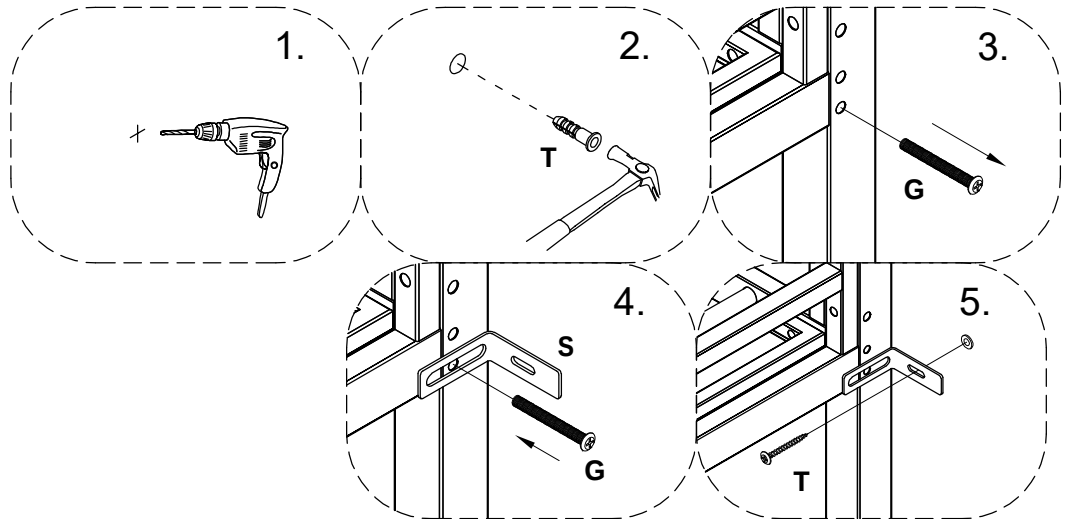

S



2PCS

T



2SETS

CERTIFICATE OF CONFORMITY

The following products has been tested by Eurofins MTS Consumer Product Testing (Dongguan) Co. Ltd as specified complied with the requirements of RoHS Directive 2011/65/EU & its amendment Directive (EU) 2015/863 as last amended by Directive (EU) 2017/2102:

Report No.: EFW726014459-C-01 Revised2

Applicant	: Shenzhen GEAO Technology Co.,Ltd.
Address	: 1302, building A4, Huaqiang Creative Industrial Park, Biyan Community, Guangming Street, Guangming District, Shenzhen,Guangdong, CHINA
Manufacturer	: Shenzhen GEAO Technology Co.,Ltd.
Manufacturer address	: 1302, building A4, Huaqiang Creative Industrial Park, Biyan Community, Guangming Street, Guangming District, Shenzhen,Guangdong, CHINA
Factory	: Henan GEAO Power Adapter Technology Co.,Ltd.
Factory address	: Northwest of the intersection of Huayuan road and West 1st ring road, Bishui sub district office, Biyang County, ZHUMADIAN, Henan CHINA
Product Description	: Multiple Socket Outlets
Tested Model No.	: GEO101T-050210
Model list	: GEO101T-050210-1,GEO101T-050210-A-1,GEO101T-050210-A-1-B,GE O101T-050210-A-1-USB,GEO101T-050210-A-1-AC,GEO101T-050210-C ,GEO101T-050210-C-1,GEO101T-050210-C-1-B,GEO101T-050210-C-1- USB,GEO101T-050210-C-1-AC,GEO101T-050210-A,GEO101T-050210- A-2,GEO101T-050210-A-2-B,GEO101T-050210-A-2-USB,GEO101T-050 210-A-2-AC,GEO101T-050210-C,GEO101T-050210-C-2,GEO101T-0502 10-C-2-B,GEO101T-050210-C-2-USB,GEO101T-050210-C-2-AC,GEO10 1T-050210-A-3,GEO101T-050210-A-3-B,GEO101T-050210-A-3-USB,GE O101T-050210-A-3-AC,GEO101T-050210-A-33,GEO101T-050210-A-33- USB,GEO101T-050210-A-33-AC,GEO101T-050210-C-3,GEO101T-0502 10-C-3-B,GEO101T-050210-C-3-USB,GEO101T-050210-C-3-AC,GEO10 1T-050210-C-33,GEO101T-050210-C-33-USB,GEO101T-050210-C-33-A C,GEO101T-050210-A-4,GEO101T-050210-A-4-USB,GEO101T-050210- A-4-AC,GEO101T-050210-A-44,GEO101T-050210-A-44-USB,GEO101T- 050210-A-44-AC,GEO101T-050210-C-4,GEO101T-050210-C-4-USB,GE O101T-050210-C-4-AC,GEO101T-050210-C-44,GEO101T-050210-C-44- USB,GEO101T-050210-C-44-AC,GEO101T-050200-A-1,GEO101T-0502 00-A-1-B,GEO101T-050200-A-1-USB,GEO101T-050200-A-1-AC,GEO10 1T-050200-C-1,GEO101T-050200-C-1-B,GEO101T-050200-C-1-USB,GE O101T-050200-C-1-AC,GEO101T-050200,GEO101T-050200-A-2,GEO10 1T-050200-A-2-B,GEO101T-050200-A-2-USB,GEO101T-050200-A-2-AC, GEO101T-050200-C,GEO101T-050200-C-2,GEO101T-050200-C-2-B,G

O101T-050200-C-2-USB,GEO101T-050200-C-2-AC,GEO101T-050200-A-3,GEO101T-050200-A-3-B,GEO101T-050200-A-3-USB,GEO101T-050200-A-3-AC,GEO101T-050200-A-33,GEO101T-050200-A-33-USB,GEO101T-050200-A-33-AC,GEO101T-050200-C-3,GEO101T-050200-C-3-B,GEO101T-050200-C-3-USB,GEO101T-050200-C-3-AC,GEO101T-050200-C-33,GEO101T-050200-C-33-USB,GEO101T-050200-C-33-AC,GEO101T-050200-A-4,GEO101T-050200-A-4-USB,GEO101T-050200-A-4-AC,GEO101T-050200-A-44,GEO101T-050200-A-44-USB,GEO101T-050200-A-44-AC,GEO101T-050200-C-4,GEO101T-050200-C-4-USB,GEO101T-050200-C-4-AC,GEO101T-050200-C-44,GEO101T-050200-C-44-USB,GEO101T-050200-C-44-AC,GEO201T-PD20W-1,GEO201T-PD20W-1-B,GEO201T-PD20W-1-USB,GEO201T-PD20W-1-AC,GEO201T-PD20W,GEO201T-PD20W-2,GEO201T-PD20W-2-B,GEO201T-PD20W-2-USB,GEO201T-PD20W-2-AC,GEO201T-PD20W-3,GEO201T-PD20W-3-B,GEO201T-PD20W-3-USB,GEO201T-PD20W-3-AC,GEO201T-PD20W-33,GEO201T-PD20W-33-USB,GEO201T-PD20W-33-AC,GEO201T-PD20W-4,GEO201T-PD20W-4-USB,GEO201T-PD20W-4-AC,GEO201T-PD20W-44,GEO201T-PD20W-44-USB,GEO201T-PD20W-44-AC,GEO-T-2AC,GEO-T-2AC-AC,GEO-T-3AC,GEO-T-3AC-AC,GEO-T-4AC,GEO-T-4AC-AC

Laboratory Name : Eurofins MTS Consumer Product Testing (Dongguan) Co. Ltd
Address : No.76, Liang Ping Road, Xin Jiu Wei Village, Liaobu,
Town Dongguan City, Guangdong Province, China

Test standard(s) : IEC 62321-3-1: 2013, IEC 62321-5: 2013, IEC 62321-4:2013+AMD1:
2017,IEC 62321-6: 2015, IEC 62321-7-1:2015, IEC 62321-7-2: 2017,
IEC 62321-8:2017.

Note: 1. The certification of conformity is based on an evaluation of samples mentioned above. Technical report and documentation are at the applicant's disposal. This is to certify that the tested samples are in conformity with the above standards in latest amended version.

2. The EUT described above has been examined by us with the listed standards and found in compliance with the Council RoHS Directive 2011/65/EU & (EU)2015/863. It is possible to use RoHS marking to demonstrate the compliance with the RoHS Directive.

The statement is based on a single evaluation of one sample of above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

For and on behalf of
Eurofins MTS Consumer Product Testing (Dongguan) Co. Ltd



RoHS

Signature: Carol Ke/Operations and R&D director – Eurofins MTS Consumer Product
Testing (Dongguan) Co. Ltd
Date: Apr 24, 2026

Shenzhen ZKT Technology Co., Ltd.

1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue,
Fuhai Street, Bao'an District, Shenzhen, China



Certificate of Compliance

Certificate Number: ZKT-260114L0992C

Certificate's Holder : Shenzhen Lanling Optoelectronics Technology Co., Ltd
Address : 511-G5, Building C, No. 101 Fukang Road, Henggang Community, Henggang Street, Longgang District, Shenzhen City, Guangdong Province

Manufacturer : Shenzhen Lanling Optoelectronics Technology Co., Ltd
Address : 511-G5, Building C, No. 101 Fukang Road, Henggang Community, Henggang Street, Longgang District, Shenzhen City, Guangdong Province

Product : Controller strip lights
Trade Mark : /
Model(s) : YH-358
LL-LED5050X60, LL-LED5050X18, LL-LED5050X30,
LL-LED5050X48, LL-LED5050X60, LL-LED5050X72,
LL-LED5050X90, LL-LED5050X120, LL-LED2835X30,
LL-LED2835X60, LL-LED2835X120, LL-LED2835X180,
LL-LED2835X240, LL-LED3528X30, LL-LED3528X60,
LL-LED3528X120, LL-LED3528X240, LL-LED5730X60,
LL-LED5730X72, LL-LED5730X84, LL-LED3535X60,
LL-LED3535X120, CWG-5050RGB-60D-5v

Test Method : IEC 62321-5:2013 & IEC 62321-4:2013+A1:2017 &
IEC 62321-7-2:2017 & IEC 62321-6:2015 & IEC 62321-8:2017
& IEC 62321-3-1:2013 & IEC 62321-7-1:2015

The following products have been tested by us and found in conformity with the (RoHS) Directive 2011/65/EU Annex II amending Annex (EU)2015/863 and amending Annex (EU)2017/2102. It is possible to use CE Marking to demonstrate the conformity with this Directive. It is only valid in connection with the test report number: ZKT-260114L0992R. After preparation of the necessary technical documentation according the requirement of EN IEC 63000:2018 as well as the verification of conformity the CE marking as shown below can be affixed on the equipment.

RoHS



This Certificate of Conformity is based on single evaluation of the submitted sample(s) of the above mentioned product. It does not imply an assessment of the whole product and relevant Directives to be observed.

Shenzhen ZKT Technology Co., Ltd.

1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue,
Fuhai Street, Bao'an District, Shenzhen, China



Certificate of Compliance

Certificate Number: ZKT-250829L21270C

Certificate's Holder : Shenzhen Lanling Optoelectronics Technology Co., Ltd
511-G5, Building C, No. 101 Fukang Road, Henggang Community,
Henggang Street, Longgang District, Shenzhen City, Guangdong
Province

Manufacturer : Shenzhen Lanling Optoelectronics Technology Co., Ltd
511-G5, Building C, No. 101 Fukang Road, Henggang Community,
Henggang Street, Longgang District, Shenzhen City, Guangdong
Province

Trade Mark : /

Product : LED Strip

Model(s) : CWG-5050RGB-60D-5v
LED5050X18, LED5050X30, LED5050X48, LED5050X60, LED5050X72,
LED5050X90, LED5050X120, LED2835X30, LED2835X60, LED2835X120,
LED2835X180, LED2835X240, LED3528X30, LED3528X60,
LED3528X120, LED3528X240, LED5730X60, LED5730X72, LED5730X84,
LED3535X60, LED3535X120

Test Standard : EN IEC 55015:2019+A11:2020
EN IEC 61000-3-2:2019 + A1:2021 + A2:2024
EN 61000-3-3:2013 + A1:2019 + A2:2021
EN IEC 61547:2023

This Attestation of Compliance is issued on a voluntary basis for electrical equipment below the voltage limits of EMC Directive 2014/30/EU. The essential requirements are fulfilled accordingly based on the technical specifications applicable at the time of issuance. See also notes overleaf. It is only valid in connection with the test report number: ZKT-250829L21270E.



This Certificate of Conformity is based on single evaluation of the submitted sample(s) of the above mentioned product. It does not imply an assessment of the whole product and relevant Directives to be observed.

CERTIFICATE

of Conformity Directive 2014/30/EU Electromagnetic Compatibility

Registration No.: AE 50715325 0001
Report No.: CN262PMU 001
Holder: Shenzhen GEAO Technology Co.,Ltd.
1302, building A4, Huaqiang
Creative Industrial Park,
Biyang Community, Guangming Street
Guangming District, Shenzhen,
Guangdong
P.R. China

Product: Socket Outlet
Multiple Socket-outlets

Type designation listed on the next page

This certificate of conformity is based on an evaluation of a sample of the above mentioned product. This is to certify that the tested sample is in conformity with all provisions of Annex I of Council Directive 2014/30/EU. This certificate does not imply assessment of the production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorized to use this certificate in connection with the EC declaration of conformity according to the a.m. Directive.
This is not an EU-Type Examination Certificate.

Date: 2026-02-08

Certification Body

Tongle Lee

Tongle Lee



TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg

CERTIFICATE

of Conformity Directive 2014/30/EU Electromagnetic Compatibility

Registration No.: AE 50715325 0001
Product: Socket Outlet
Multiple Socket-outlets

Tested according to: EN 55032:2015+A11+A1
EN 55035:2017+A11
EN IEC 61000-3-2:2019
EN 61000-3-3:2013+A1
EN IEC 61000-6-1:2019
EN IEC 61000-6-3:2021

Identification:

Type Designation

GEO101T-050210-1, GEO101T-050210-A-1
GEO101T-050210-A-1-B, GEO101T-050210-A-1-USB
GEO101T-050210-A-1-AC, GEO101T-050210-C-1
GEO101T-050210-C-1-B, GEO101T-050210-C-1-USB
GEO101T-050210-C-1-AC, GEO101T-050210
GEO101T-050210-A, GEO101T-050210-A-2
GEO101T-050210-A-2-B, GEO101T-050210-A-2-USB
GEO101T-050210-A-2-AC, GEO101T-050210-C
GEO101T-050210-C-2, GEO101T-050210-C-2-B
GEO101T-050210-C-2-USB, GEO101T-050210-C-2-AC
GEO101T-050210-A-3, GEO101T-050210-A-3-B
GEO101T-050210-A-3-USB, GEO101T-050210-A-3-AC
GEO101T-050210-A-33, GEO101T-050210-A-33-USB
GEO101T-050210-A-33-AC, GEO101T-050210-C-3
GEO101T-050210-C-3-B, GEO101T-050210-C-3-USB
GEO101T-050210-C-3-AC, GEO101T-050210-C-33
GEO101T-050210-C-33-USB, GEO101T-050210-C-33-AC
GEO101T-050210-A-4, GEO101T-050210-A-4-USB
GEO101T-050210-A-4-AC, GEO101T-050210-A-44
GEO101T-050210-A-44-USB, GEO101T-050210-A-44-AC
GEO101T-050210-C-4, GEO101T-050210-C-4-USB
GEO101T-050210-C-4-AC, GEO101T-050210-C-44
GEO101T-050210-C-44-USB, GEO101T-050210-C-44-AC

TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg

© TÜV, TÜV and TÜV are registered trademarks. Utilisation and application requires prior approval.

CERTIFICATE

of Conformity Directive 2014/30/EU Electromagnetic Compatibility

Registration No.: AE 50715325 0001

Product: Socket Outlet
Multiple Socket-outlets

Tested according to: EN 55032:2015+A11+A1
EN 55035:2017+A11
EN IEC 61000-3-2:2019
EN 61000-3-3:2013+A1
EN IEC 61000-6-1:2019
EN IEC 61000-6-3:2021

Identification:

Type Designation

GE0101T-050200-A-1, GE0101T-050200-A-1-B
GE0101T-050200-A-1-USB, GE0101T-050200-A-1-AC
GE0101T-050200-C-1, GE0101T-050200-C-1-B
GE0101T-050200-C-1-USB, GE0101T-050200-C-1-AC
GE0101T-050200, GE0101T-050200-A-2
GE0101T-050200-A-2-B, GE0101T-050200-A-2-USB
GE0101T-050200-A-2-AC, GE0101T-050200-C
GE0101T-050200-C-2, GE0101T-050200-C-2-B
GE0101T-050200-C-2-USB, GE0101T-050200-C-2-AC
GE0101T-050200-A-3, GE0101T-050200-A-3-B
GE0101T-050200-A-3-USB, GE0101T-050200-A-3-AC
GE0101T-050200-A-33, GE0101T-050200-A-33-USB
GE0101T-050200-A-33-AC, GE0101T-050200-C-3
GE0101T-050200-C-3-B, GE0101T-050200-C-3-USB
GE0101T-050200-C-3-AC, GE0101T-050200-C-33
GE0101T-050200-C-33-USB, GE0101T-050200-C-33-AC
GE0101T-050200-A-4, GE0101T-050200-A-4-USB
GE0101T-050200-A-4-AC, GE0101T-050200-A-44
GE0101T-050200-A-44-USB, GE0101T-050200-A-44-AC
GE0101T-050200-C-4, GE0101T-050200-C-4-USB
GE0101T-050200-C-4-AC, GE0101T-050200-C-44
GE0101T-050200-C-44-USB, GE0101T-050200-C-44-AC
GE0201T-PD20W-1, GE0201T-PD20W-1-B
GE0201T-PD20W-1-AC, GE0201T-PD20W

TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg

CERTIFICATE

of Conformity Directive 2014/30/EU Electromagnetic Compatibility

Registration No.: AE 50715325 0001

Product: Socket Outlet
Multiple Socket-outlets

Tested according to: EN 55032:2015+A11+A1
EN 55035:2017+A11
EN IEC 61000-3-2:2019
EN 61000-3-3:2013+A1
EN IEC 61000-6-1:2019
EN IEC 61000-6-3:2021

Identification: Type Designation
GEO201T-PD20W-2, GEO201T-PD20W-2-B
GEO201T-PD20W-2-AC, GEO201T-PD20W-3
GEO201T-PD20W-3-B, GEO201T-PD20W-3-AC
GEO201T-PD20W-33, GEO201T-PD20W-33-AC
GEO201T-PD20W-4, GEO201T-PD20W-4-AC
GEO201T-PD20W-44, GEO201T-PD20W-44-AC
GEO-T-2AC, GEO-T-2AC-AC, GEO-T-3AC
GEO-T-3AC-AC, GEO-T-4AC, GEO-T-4AC-AC

Serial No.: Engineering Samples
Remark: Refer to test report CN262PMU 001 for details.



TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg

Prüfbericht-Nr.: Test Report No.:	CN262PMU 001	Auftrags-Nr.: Order No.:	168590510	Seite 1 von 36 Page 1 of 36
Kunden-Referenz-Nr.: Client Reference No.:	N/A	Auftragsdatum: Order date.:	2025-12-20	
Auftraggeber: Client:	Shenzhen GEO Technology Co.,Ltd. 1302, building A4, Huaqiang Creative Industrial Park, Biyan Community, Guangming Street, Guangming District, Shenzhen, Guangdong P.R. China			
Prüfgegenstand: Test item:	Multiple Socket-outlets			
Bezeichnung / Typ-Nr.: Identification / Type No.:	See clause 5 on page 2			
Auftrags-Inhalt: Order content:	TUV Rheinland - EMC service			
Prüfgrundlage: Test specification:	EN 55032:2015+A11+A1 EN 55035:2017+A11 EN IEC 61000-3-2: 2019		EN 61000-3-3: 2013+A1 EN IEC 61000-6-1:2019 EN IEC 61000-6-3:2021	
Wareneingangsdatum: Date of receipt:	2025-12-20			
Prüfmuster-Nr.: Test sample No.:	A004003205-002-003			
Prüfzeitraum: Testing period:	Refer to test report			
Ort der Prüfung: Place of testing:	See section 2.1			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by: Chunli Zheng Datum: Date: 2026-02-04 Position / Stellung:	genehmigt von: authorized by: Ware Xin Ausstellungsdatum: Issue date: 2026-02-04 Position / Stellung :		Ware Xin Expert/Sachverständige(r)	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged:		
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				