Joyful Kids · Joyful Trip

www.jovikids.com

jovikids_global

service@jovikids.com

jovikids_global

EC REP

RETE GmbH.
Buschweg 10, 51503 Rösrath, Germany
Nora Baby Ltd.
Highclere House, 180 Main Biggin Hill,
United Kingdom, TN16 3BB


25V1.0

Model WDCS006

All rights reserved @2025 JOVIKIDS. JOVIKIDS and all associated logos are trademarks.
All product specifications are correct at time of print.
JOVIKIDS reserves the right to change anything at any time without prior notice.
Color representation is as close as processes allow.

USER MANUAL

ARIA i-Size

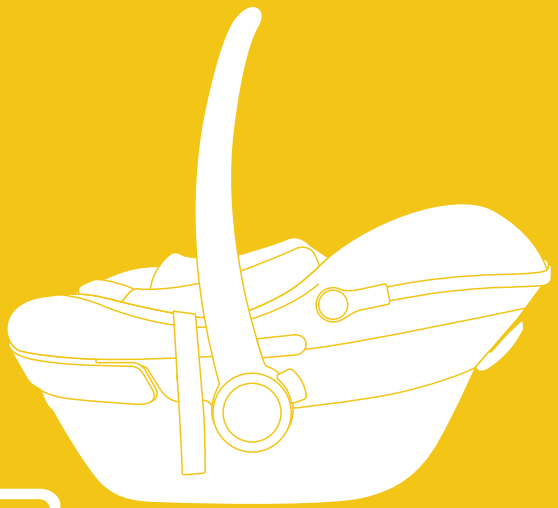

Approx.
0M–18M
40–87cm

CERTIFICATION


...as a child safety seat installed in avehicle

Tested and certified according to ECE*R129		
Model No.	Stature	Weight
WDCS006	Height from 40cm to 87cm	Up to 13kg

*ECE= European Standard for Safety Equipment .

The child safety seat has been designed, tested and certified according to the requirements of the European Standard for Child Safety Equipment (ECE R129). The seal of approval “E” (in a circle) and the approval number are located on the approval label (sticker on the child safety seat).

This approval will be invalidated if you make any modifications to the child safety seat. Only the manufacturer is permitted to make modifications to the child safety seat.



Recommended for:
Age: From birth to approx. 18 months
Stature: 40cm-87cm
Only suitable for vehicle seats with automatic three-point belts approved by UN Regulation No. 16 or a comparable standard.



This infant carrier features a ISOFIX base for easier installation,
ensuring maximum safety
and comfort for your baby during travel.



EN Scan for user manual

DE Scan für Benutzerhandbuch

FR Scannez pour le manuel d'utilisation

IT Scansiona per il manuale utente

ES Escanear para el manual del usuario


JP Qrコードをスキャンして説明書を表示します

AR يحاشرلإل ايلحلح لسم

RU сканируйте для руководства пользователя

NL

This child safety seat complies with UN Regulation No. 129/04. Please read the full instructions carefully before installation and using this product.



WDCS006

! NOTE!

The insert gives newborn the necessary support .

The newborn insert is only suitable for infants with height from 40 to 75cm. If your child has height more than 75cm, please take out the newborn insert.




Newborn Insert

If your child is up to 75cm tall,please remove the newbon insert.

Basic Information

USE IN THE VEHICLE




Proper seating positions for your child car seat.

If you need to install the seat in the front passenger seat, please ensure that the airbag is deactivated to avoid serious injury.


⚠ WARNING!

Never use this child restraint system in seating positions where an active airbag is installed.





Installation with 3-Point Seat Belt

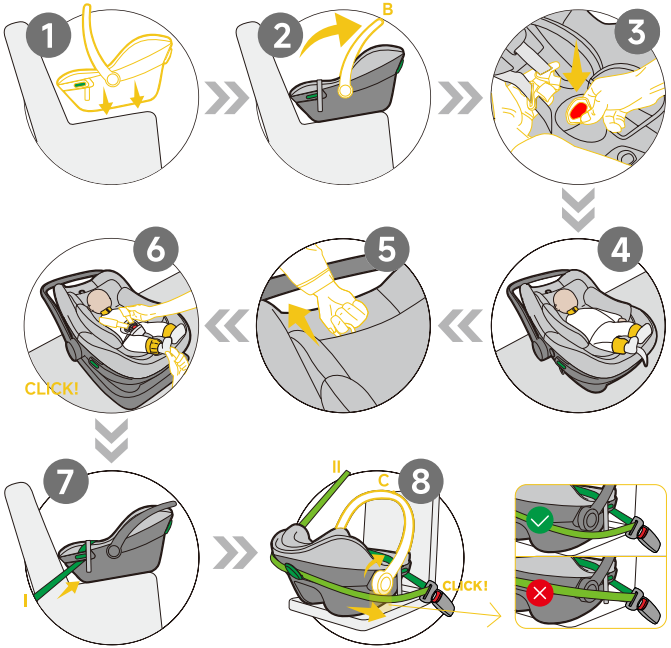

1.Warning..... 7
2.Product Description.....8-10
3.Restraining the Baby.....11-12
4.Installation with 3-Point Seat Belt.....13
5.Important Safety Precautions.....14
6.Care and Cleaning..... 15
7.Warranty..... 16
8.Safety Checklist..... 17


READ USER MANUAL PRIOR TO INSTALLING AND USING THIS INFANT CARRIER. KEEP INSTRUCTIONS FOR FUTURE USE.


1. Warning

- The rigid items and plastic parts of an ECRS shall be located and installed so that they are not liable to become trapped by a movable seat or in a door of the vehicle during everyday use of the vehicle.
- Do use carry-cots perpendicular to the longitudinal axis of the vehicle.
- Any straps holding the restraint to the vehicle should be tight, any support-leg should be in contact with the vehicle floor, any straps or impact shields restraining the child should be adjusted to the child's body, and straps should not be twisted.
- It is important to ensure that any lap strap is worn low down.
- The ECRS should be replaced when it has been subject to violent stresses in an accident.
- It is danger to make any alterations or additions to the device without the approval of the Type Approval Authority, and it is also danger of not following closely the installation instructions provided by the child restraint manufacturer.
- Be sure that children are not left in their ECRS unattended.
- Be sure that any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured.
- Be sure that the Enhanced Child Restraint System shall not be used without the cover.
- Be sure that the ECRS cover should not be replaced with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.
- Be referred to the vehicle manufacturer's handbook for the use of an “i-Size ECRS”.

2. Product Description


1. Headrest Adjustment Lever
2. Headrest
3. Shoulder Pads
4. Shoulder Straps
5. Harness Buckle
6. Newborn Insert
7. Harness Release Button
8. Harness Adjustment Strap
9. Lay-flat Release Button

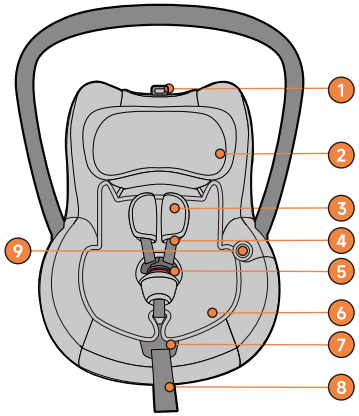


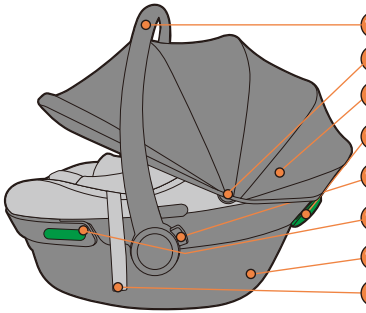

10. Handle
11. Canopy Socket
12. Canopy
13. Shoulder Belt Guide
14. Handle Adjustment Button
15. Lap Belt Guides
16. Seat Shell
17. Lay-flat Adjustment Strap

Handle Adjustment





Press and hold the handle adjustment button **(14)**. While keeping the button pressed, Adjust the handle **(10)** backward until it clicks into the desired position, ensuring you hear the "click" sound.

Position A: For safely setting the infant carrier down on the ground of flat surface outside of the car.

Position B: For placing your baby into the infant carrier.

Position C: This position is used for carrying the infant carrier and installing it on the car seat for use.

Position D: When the handle is not fully secured, an additional safety lock will engage to ensure the handle is securely locked in place. The use of this handle position D is not allowed during regular use.

! CAUTION!


Ensure the handle is securely engaged before picking up the infant carrier.

2. Product Description

Canopy




Fold Status



Expand Status

Lay-flat Adjustment








Pull the lay-flat adjustment strap **(17)** to adjust to any position untill the highest position.

Press the lay-flat release button **(9)** and gently press down the newborn insert **(6)** to adjust to any position untill the lowest position.

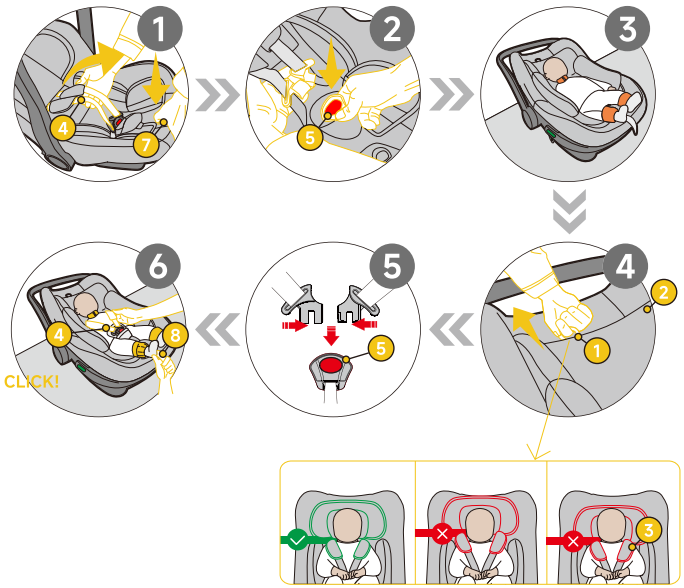

1. Press the harness release button **(7)** and simultaneously pull both shoulder straps **(4)** forward.
2. Open the harness buckle **(5)** by pressing the red release button.
3. Place your baby into the infant carrier, ensure your baby's head is correctly positioned at the center of the small headrest.

4. Adjust the headrest **(2)** height to fit your baby, pull the headrest adjusting lever **(1)** to slide the headrest **(2)** until the shoulder pads **(3)** are at the correct height. Make sure the shoulder pads **(3)** are level with or slightly above your baby's shoulders.
5. Put the buckle tongues together and insert them into the harness buckle **(5)** until you hear an audible "click".
6. Put one hand in between the baby and the shoulder straps **(4)**, pull the harness adjustment strap **(8)** end until the space between the baby and the straps is about the thickness of your palm.

! CAUTION!

Always ensure the strap end is properly managed. When traveling, particularly outside the car, make sure it is attached to the cover to prevent it from getting caught or causing any safety issues.
Pull the strap end straight towards you, not upwards or downwards.

! CAUTION!


ENSURING PROPER BUCKLING OF YOUR CHILD IN THE SAFETY SEAT

- The shoulder straps of the infant carrier are comfortably but firmly fitted around your child.
- The shoulder straps are properly adjusted to the correct height.
- DO NOT twist the seat belt.
- The buckle tongues are securely engaged in the harness buckle.



4. Installation with 3-Point Seat Belt

Installation instruction for STATURE 40cm-87 cm, Rearward Facing, 3-point belt

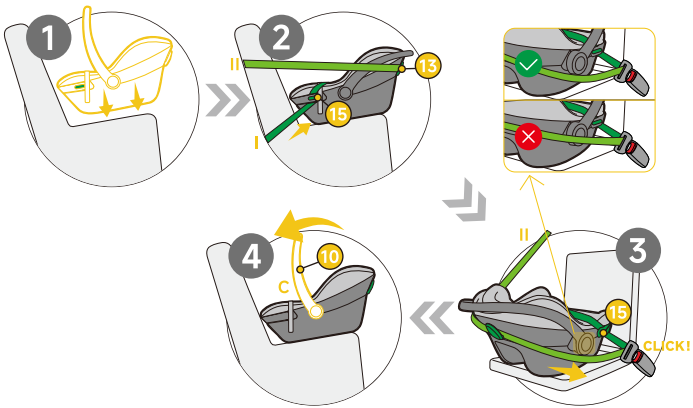

1. Place the baby carrier on the car seat.
2. Install the baby carrier using the vehicle's 3-point seat belt.
   Path I: Thread the vehicle's 3-point seat belt through the lap belt guides **(15)**, and insert the buckle tongue in the vehicle seat buckle.
   Path II: Thread the vehicle's 3-point seat belt, and take the road to the shoulder belt guide **(13)**.
3. Adjust the handle **(10)** to position C.

! CAUTION!

DO NOT twist the seat belt.



5. Important Safety Precautions

⚠ Never leave your child unattended in the child safety seat, especially when not in the vehicle.

⚠ For the Protection of All Vehicle Occupants
In the event of an emergency stop or accident, unsecured persons or objects may cause injury to other vehicle occupants. Always ensure the following:
The backrests of the vehicle seats are locked (e.g., the foldable rear seat bench latch is engaged).

- All heavy or sharp-edged objects in the vehicle (e.g., on the parcel shelf) are secured.
- All passengers in the vehicle have their seat belts fastened. The child safety seat is always secured when in the vehicle, even if no child is being transported.

To Maintain Optimal Protection

- In the event of a collision at a speed exceeding 10 km/h, the child safety seat may incur damage that is not immediately visible.
- It is important to replace the child seat after such incidents to ensure continued safety. Proper disposal of the damaged seat is required.

6. Care and Cleaning

- Regularly inspect all components for any signs of damage. Verify the proper functioning of all mechanical parts regularly.
- To avoid damage or breakage, ensure the child seat does not become trapped in car doors, seat tracks, or other vehicle mechanisms.
- If the child seat sustains damage (e.g., from being dropped), it must be inspected by the manufacturer for safety assurance.

Care For Harness Buckle

- The functionality of the harness buckle is essential for your child's safety. Malfunctions are typically caused by the buildup of dirt and dust.

Notes for Cleaning the Car Seat

- To maintain the proper functionality of the car seat, please ensure that only original replacement seat covers are used. Replacement seat covers are essential for the correct performance of the car seat and are available from your retailer or authorized branches.

⚠ The child seat must not be used without the seat cover.

- The cover can be removed and washed with a mild detergent on the washing machine's delicate cycle (30°C). Follow the instructions on the washing label of the cover. The cover's colors may fade if washed at temperatures higher than 30°C. Do not spin dry, and never use an electric dryer as the fabric may separate from the padding.
- Clean plastic parts with soapy water. Do not use harsh cleaning agents such as solvents.
- The harness can be removed and washed in lukewarm soapy water.

! CAUTION!

Never remove the buckle tongues from the straps.

7. Warranty

We provide a 3-year warranty for this infant carrier against manufacturing or material defects. The warranty period begins on the date of purchase. To validate the warranty, please keep the invoice and register your product on jovikids .com

The Warranty Does Not Cover:

- Natural signs of wear and damage resulting from excessive stress.
- Damage resulting from inappropriate or improper use.
- Color fastness may diminish when exposed to UV radiation. However, all fabrics fade when exposed to UV radiation. This is not a material defect but a normal sign of wear that is not covered by the warranty.
- Buckle malfunction is often due to the accumulation of dirt and dust, which may prevent it from working properly. If this occurs, please check if you can clean it yourself without damaging the buckle. If cleaning does not resolve the issue, please contact after sales service.

For warranty claims, please contact your retailer directly. They will provide the necessary advice and support. When processing claims, product-specific depreciation rates will be applied. Please refer to our General Terms and Conditions, which are available from your retailer.

8. Safety Checklist

	For the safety of your baby ,please check that...
	Did you read and understand the vehicle owner's manual, this user's manual, and all labels found on this Child Restraint?
	Is the Child Restraint Rear-Facing in an approved vehicle seat location?
	If using the infant carrier only, is the infant carrier secured to the vehicle seat?
	Is the harness adjusted to the correct position according to the size of the baby?
	Is the buckle strap snug against the child but not under the child?
	Is the handle locked in the position C while using this infant carrier in a vehicle?
	Is the handle locked in the position C when lifting by the handle?
	Is your child between 40 and 87 cm (16 and 34 inch) in height?
	Is the top of your child's head more than 2.5 cm (1 inch) from the top of the infant carrier or headrest, whichever is higher?

If you answered YES to all these questions, you are good to go, and please DRIVE SAFELY!