

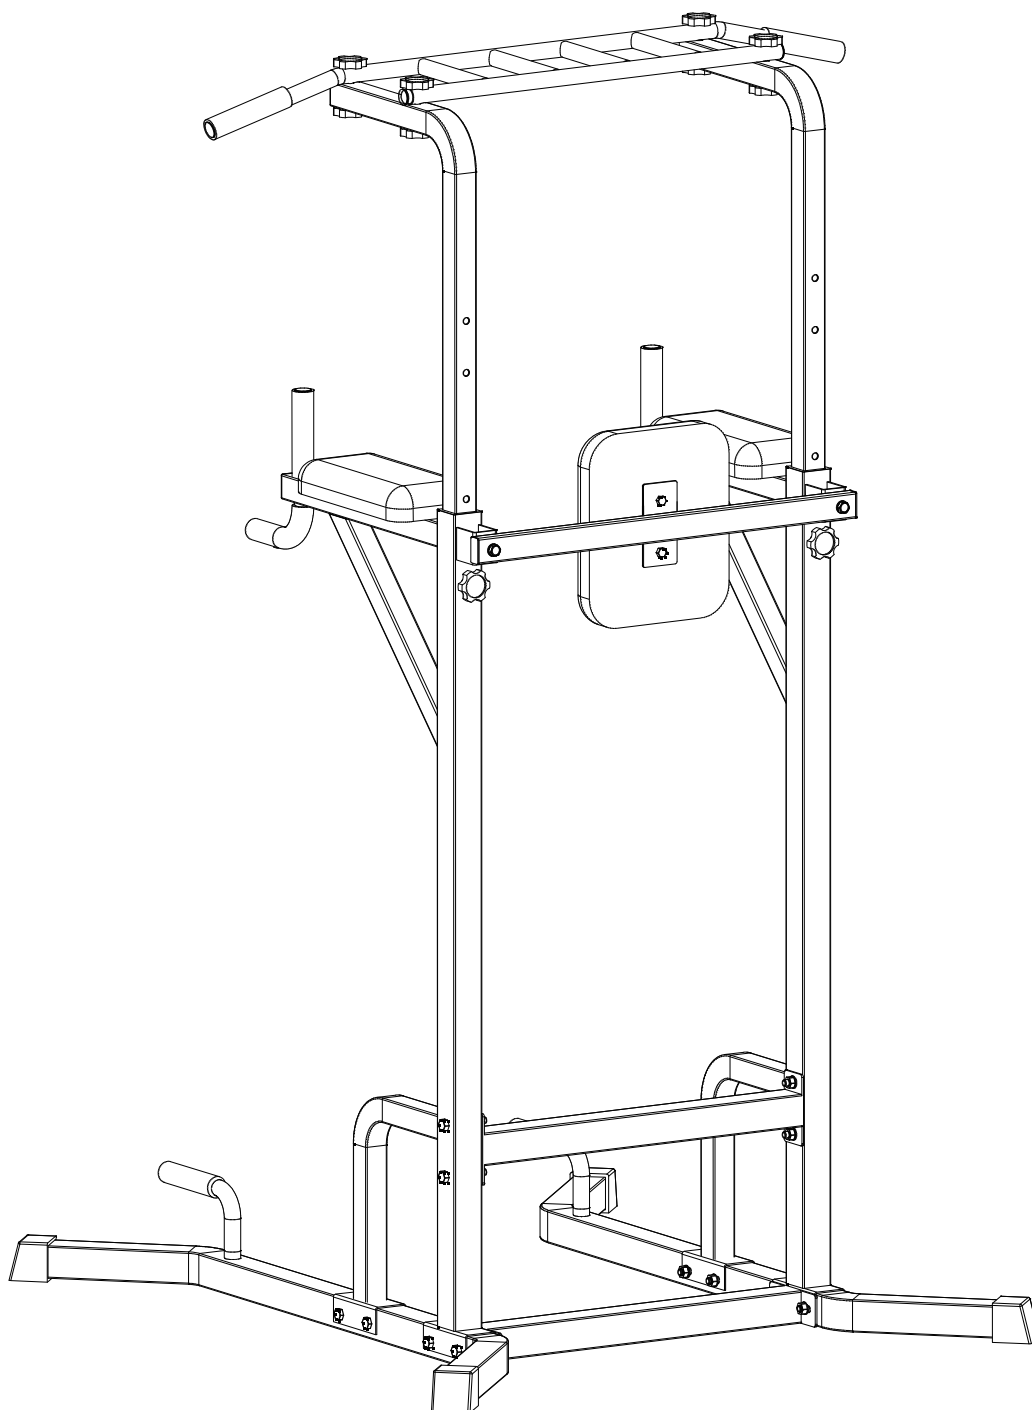











INSTRUCTION MANUAL

1  2pcs	2  1pcs	3  2pcs	4  1pcs
5  1pcs	6  2pcs	7  2pcs	8  1pcs
9  1pcs	10  M10*70 12pcs	11  M8*50 4pcs	12  M10*35 2pcs
13  M8*15 2pcs	14  M10*60 2pcs	15  M10*75 4pcs	16  M10 4pcs
17  F10 26pcs	18  M10 12pcs	19  14*7 2pcs	

Any question please feel free to contact us.
You can find the contact information on the
last page.

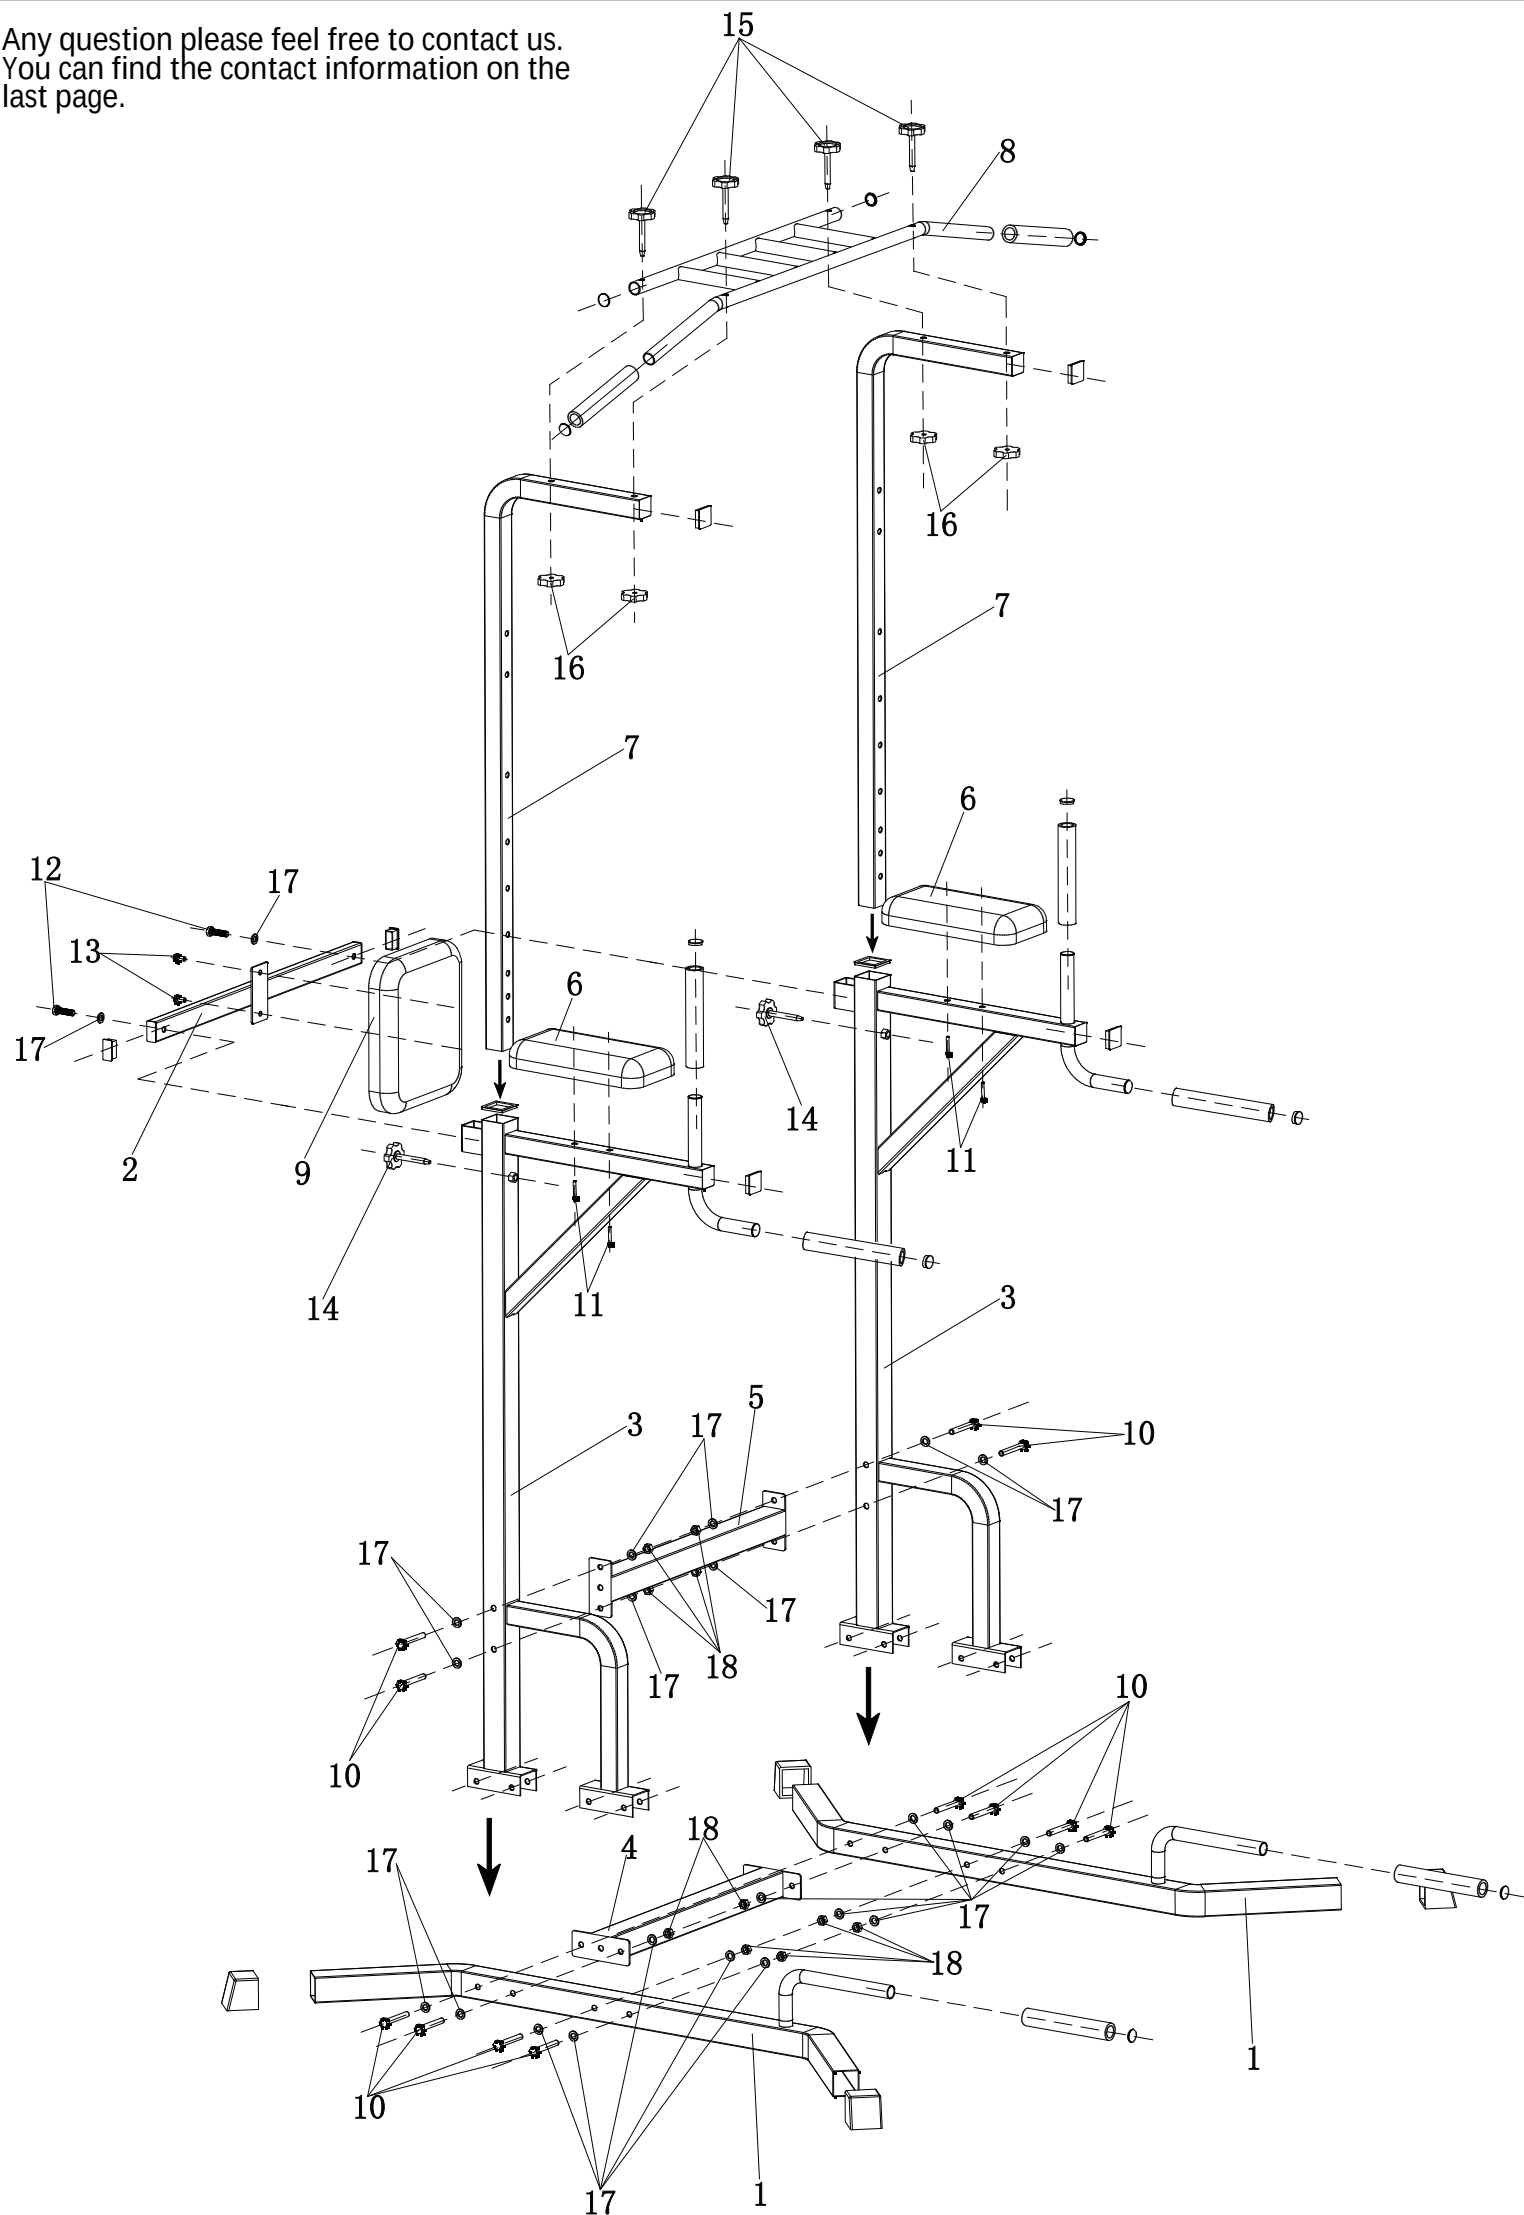


STEP 1

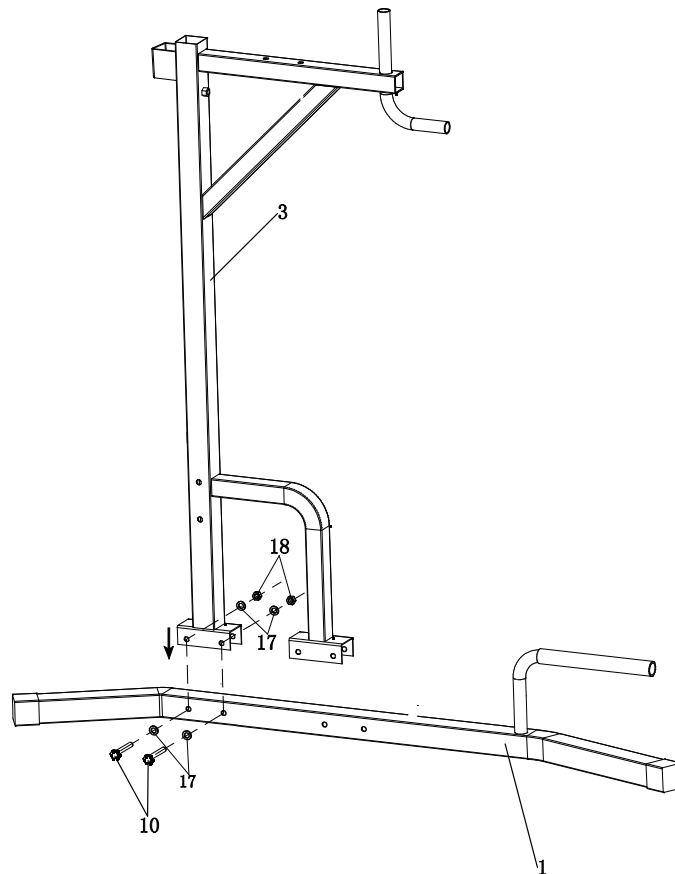


Attach the stright frame #3 to the bottom tube #1
using the #10 #17 #18 bolts and nuts.
See above image.

STEP 2

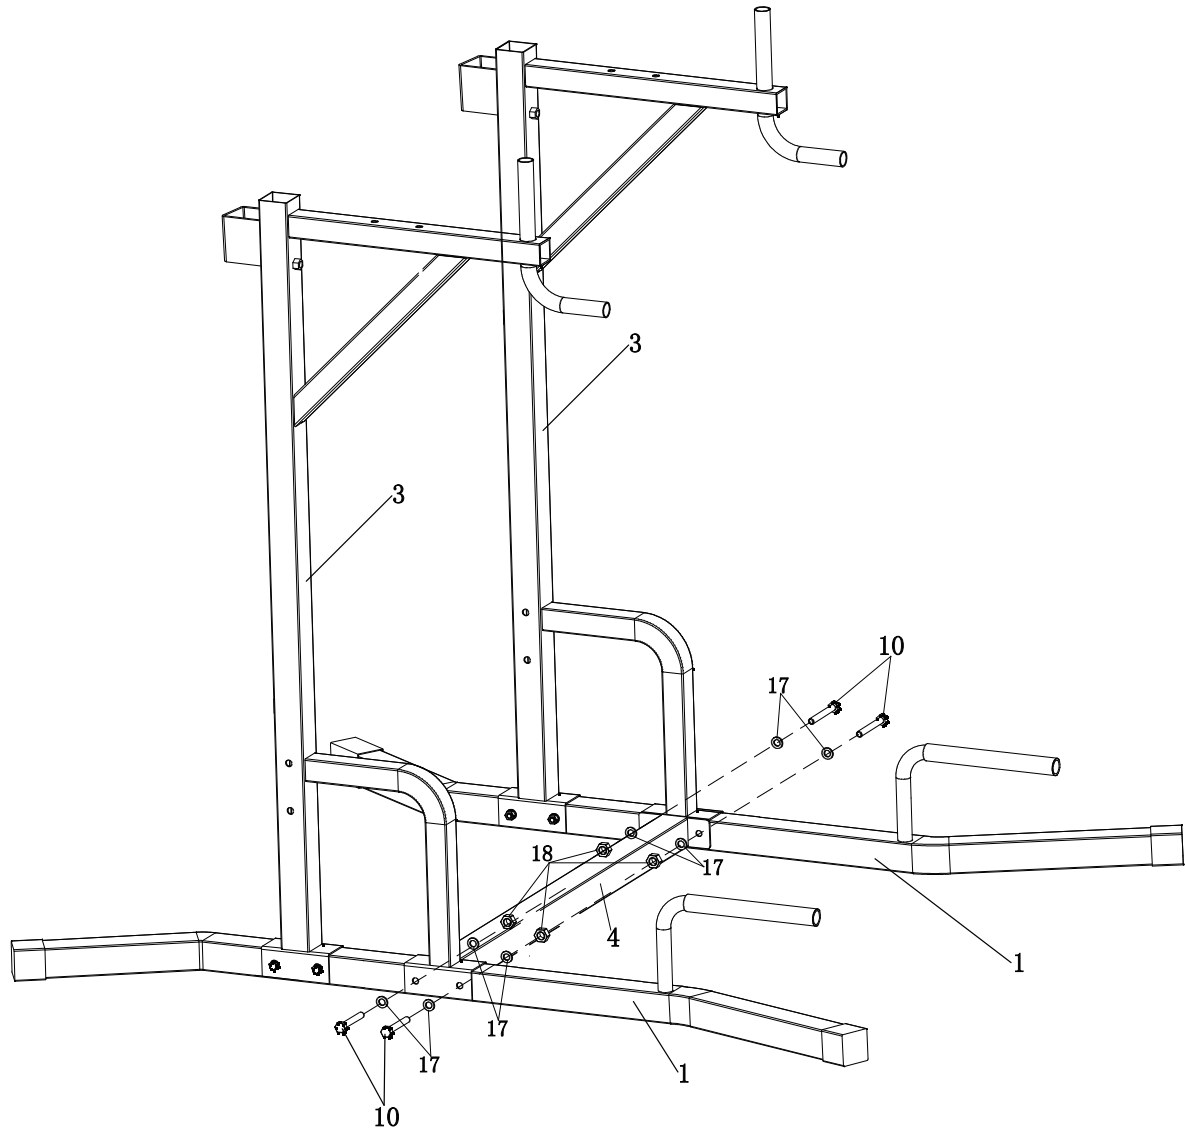


Attach the connection tube #4 to the both stright frame #3 by using the #10 #17 #18 bolts and nuts.
See above image.

STEP 3

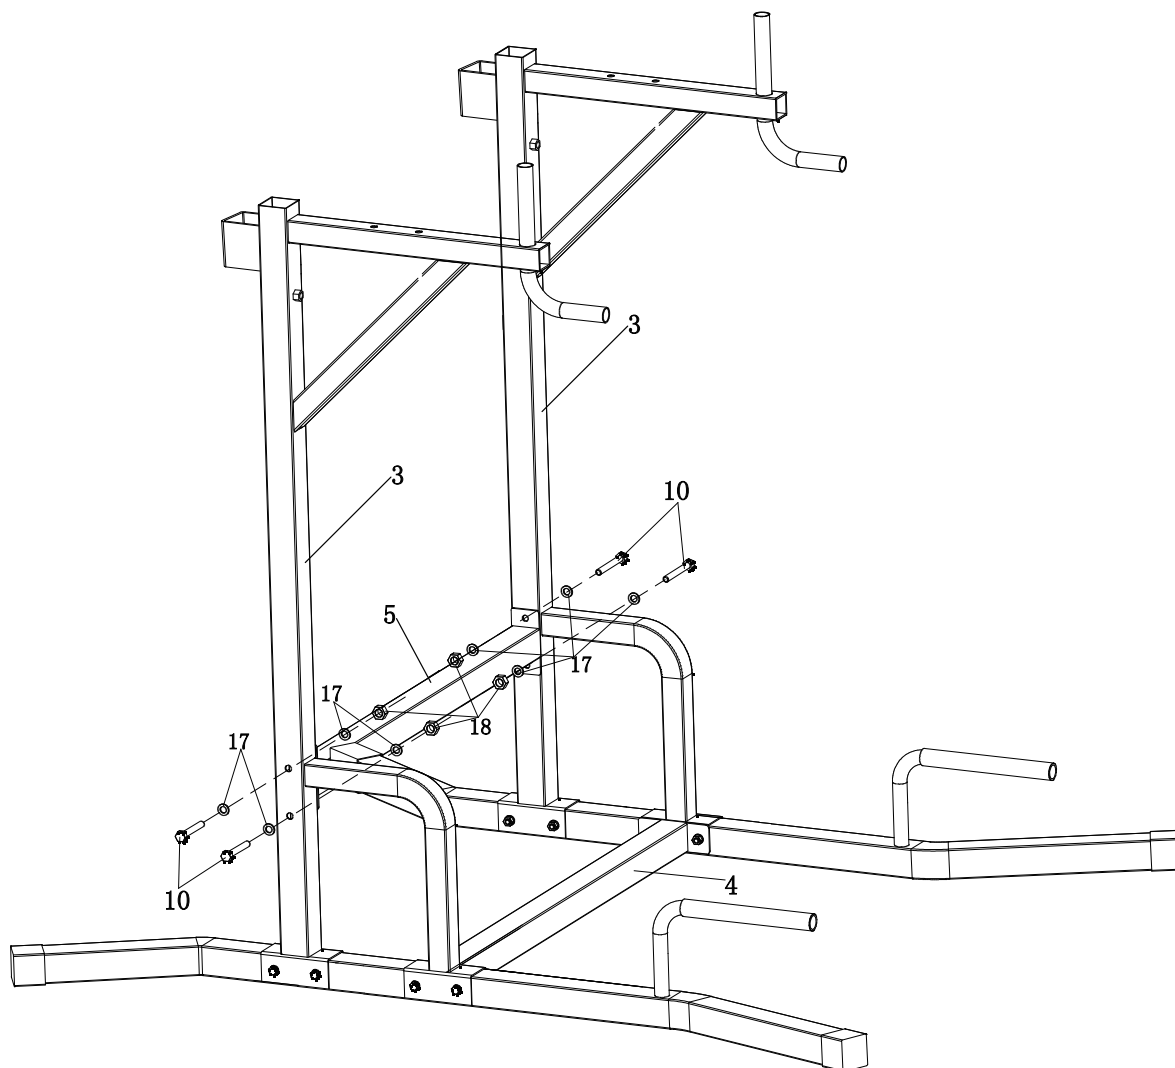


Attach the connection tube #5 to the both stright frame #3 by using the #10 #17 #18 bolts and nuts.
See above image.

STEP 4

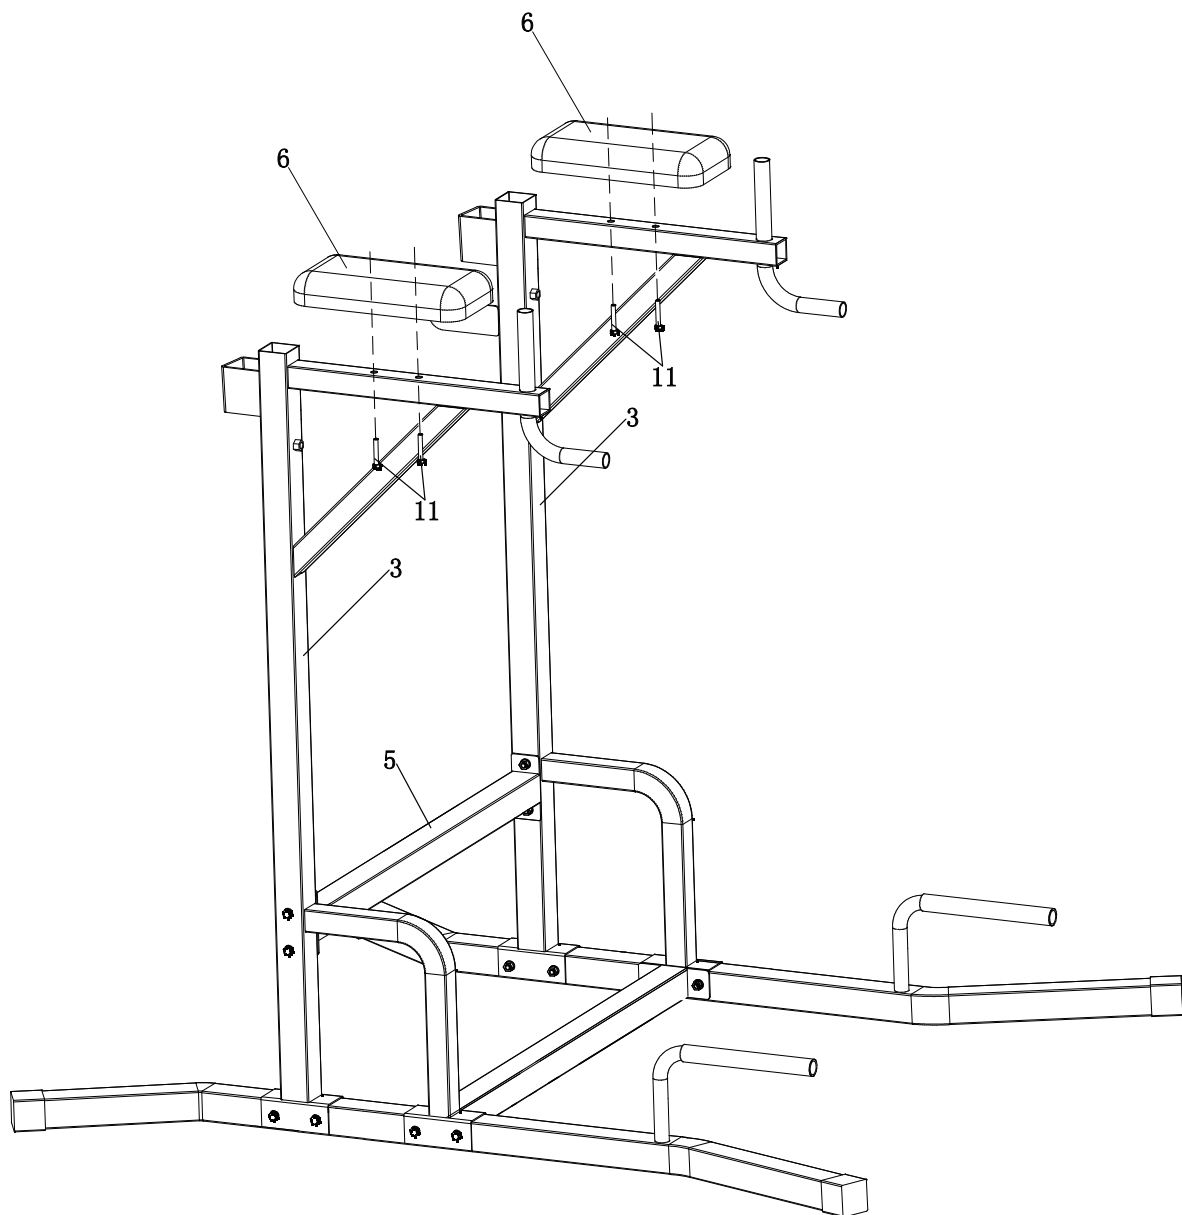


Assemble the two arm pad on the frame.
Using two bolts 11 to fix both arm pads.
See above image.

STEP 5

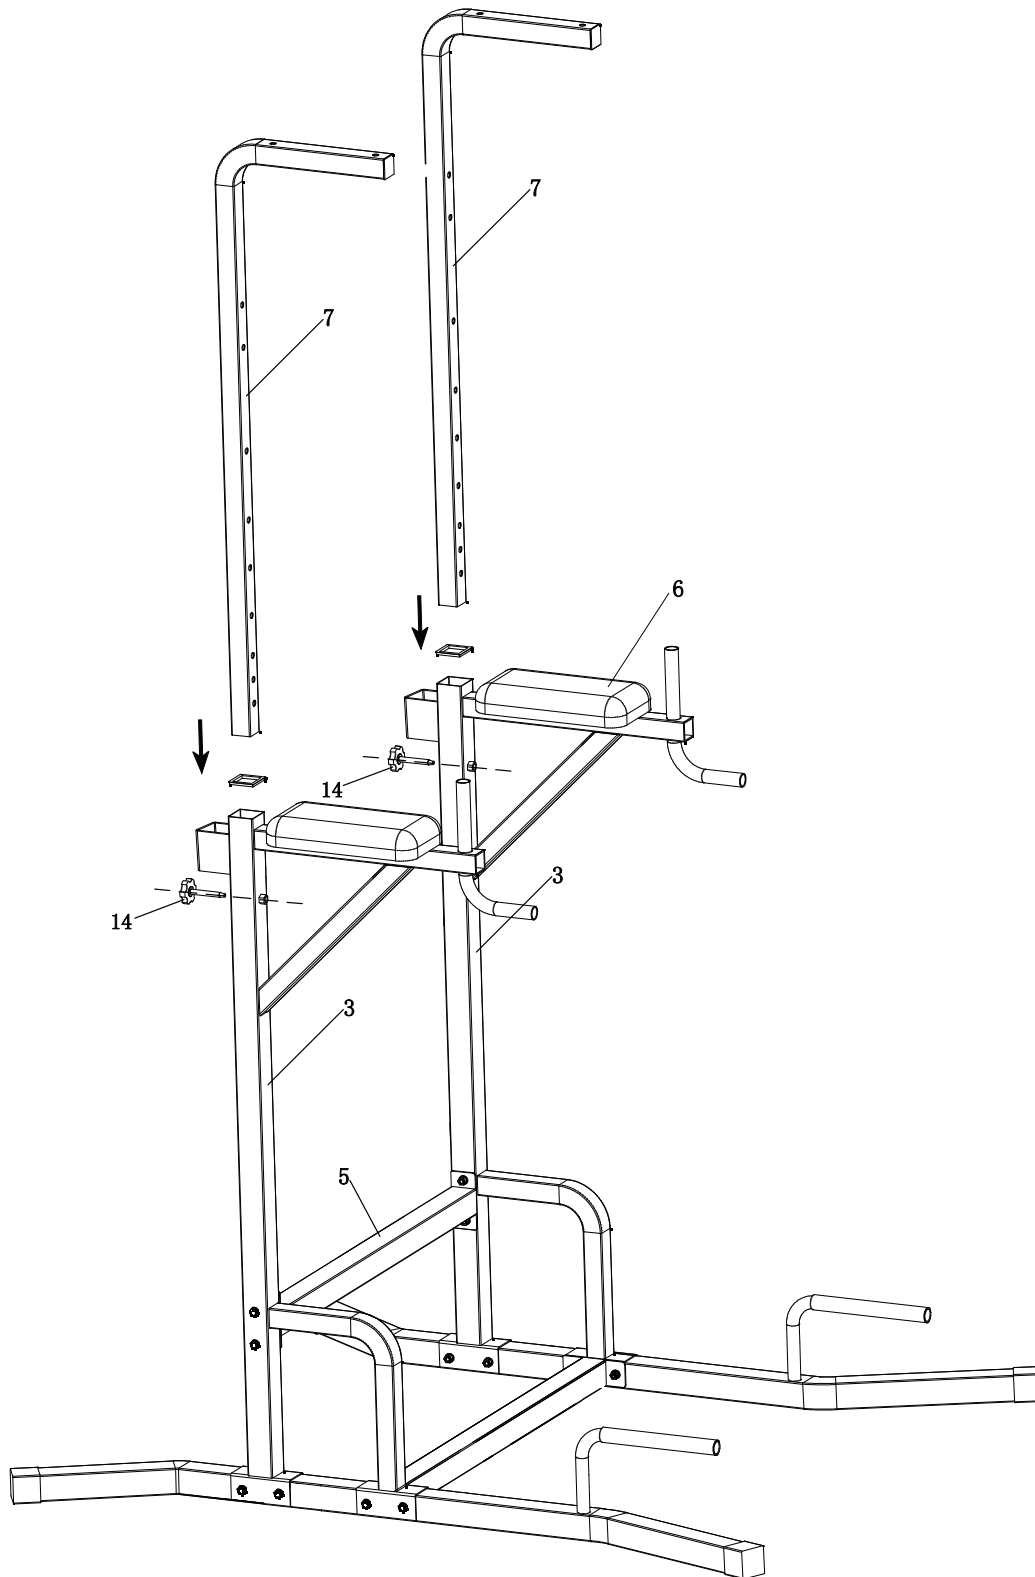


Insert 2 adjusting tubes part #7 into the straight frames. Locking by the screws knobs #14. See above image.

STEP 6

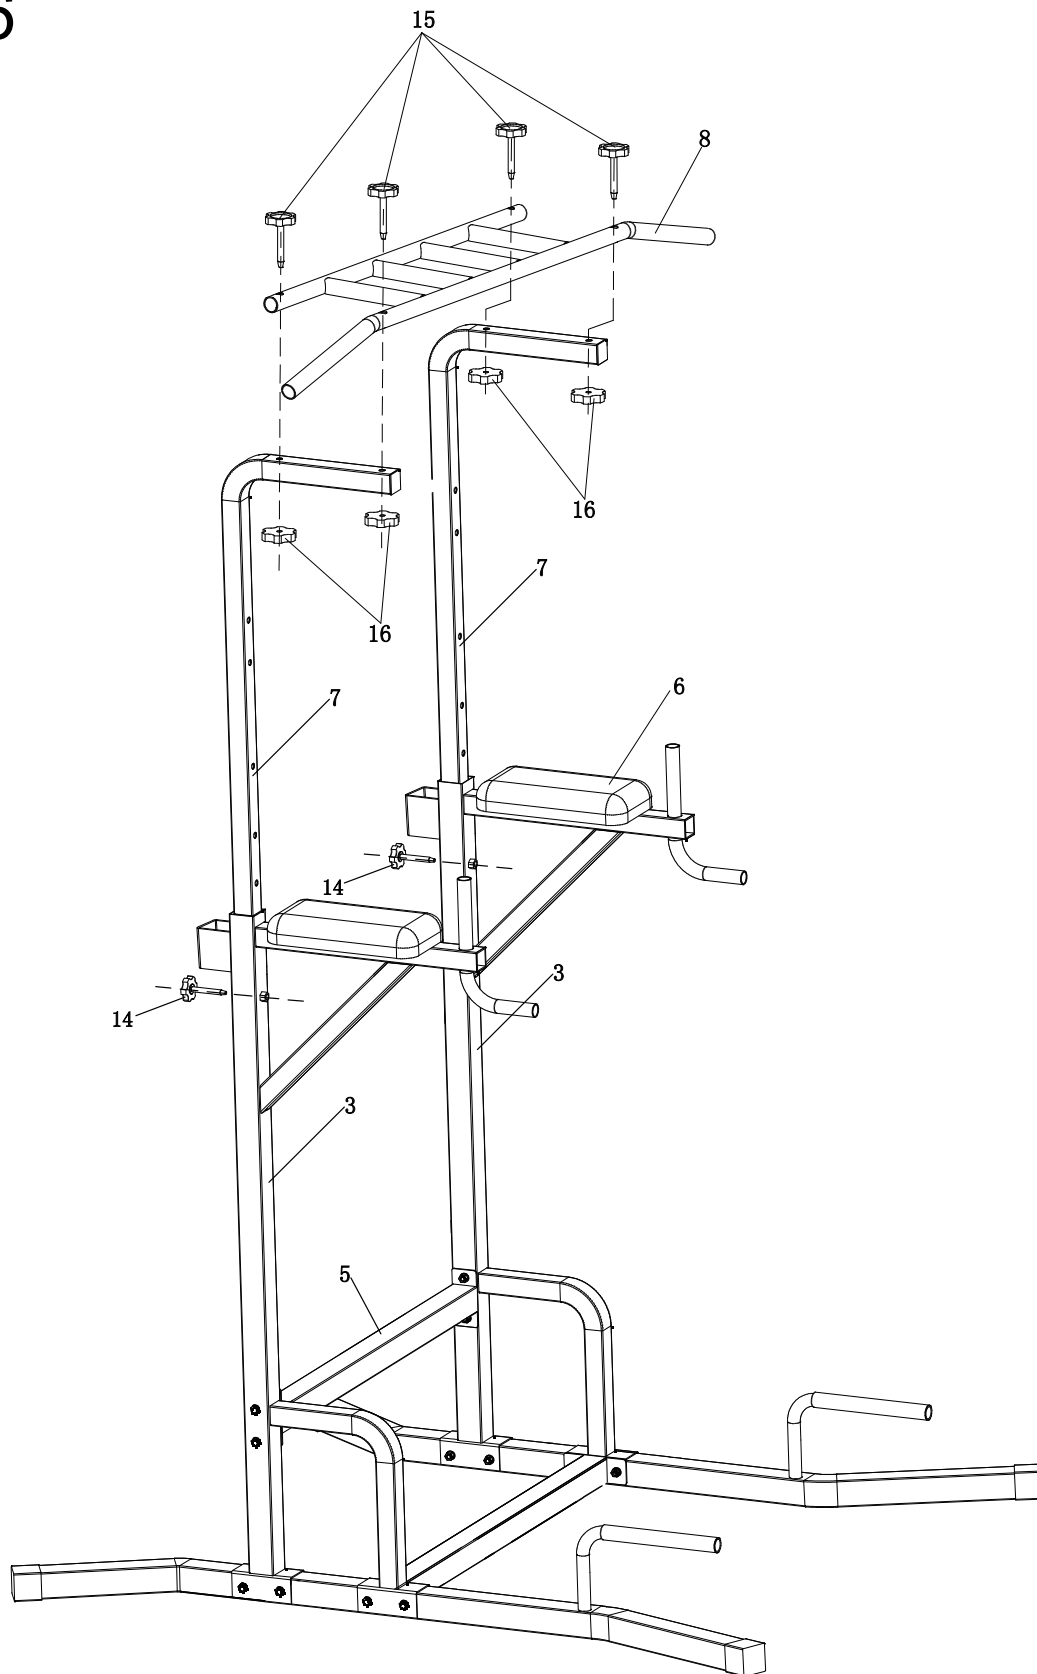

Attach the ladder frame #8 to the power tower by using 4 screws part #15.
See above image.

STEP 7

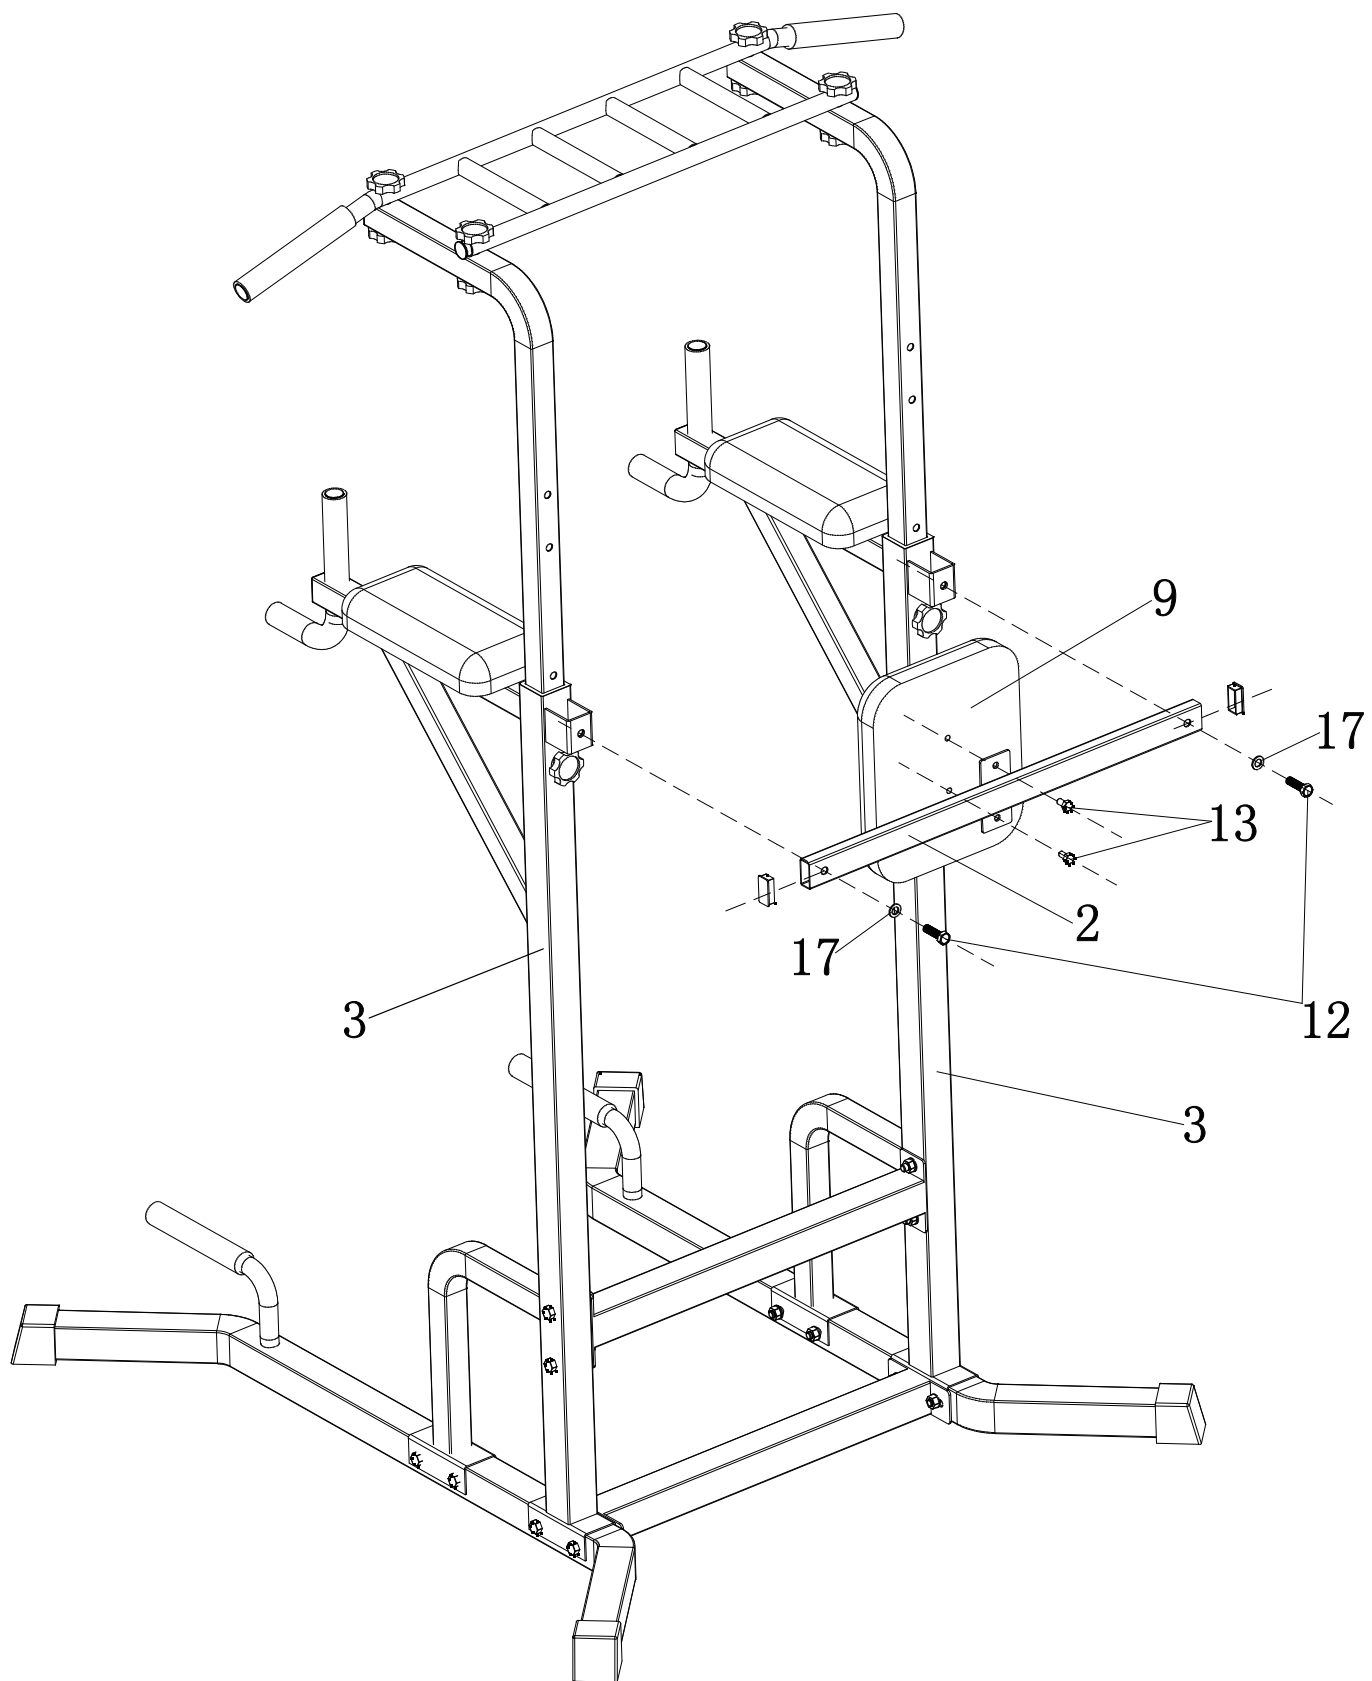

Assemble the back rest pad #9 with tube #2 by using 2 bolts part #13. Then attach back rest whole part with power tower by using bolts and washers (#12 ,#17)