



Joyful Kids · Joyful Trip

 www.jovikids.com

 [jovikids_global](https://www.instagram.com/jovikids_global)

 service@jovikids.com

EC REP

RETE GmbH.
Buschweg 10, 51503 Rösrath, Germany
Nora Baby Ltd.
Highclere House, 180 Main Biggin Hill,
United Kingdom, TN16 3BB

24V1.1

Model WD034


All rights reserved ©2025 JOVIKIDS. JOVIKIDS and all associated logos are trademarks.

All product specifications are correct at time of print.
JOVIKIDS reserves the right to change anything at any time without prior notice.
Color representation is as close as processes allow.



USER MANUAL

RANGER2 i-Size

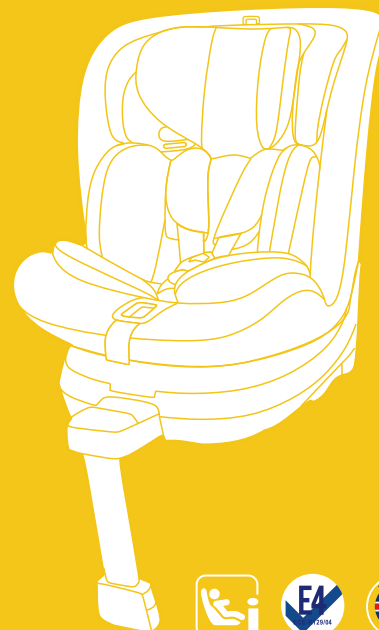

Approx.
0Y-12Y

40-150cm



Jovikids

i-Size

Universal ISOFIX

40-105cm/518kg

i-Size

Booster Seat

100cm-150cm

E4

030143

Regulation No.129/03

Recommended for:
Age: From birth to approx. 12 years
Stature: 40-150cm
Only suitable for vehicle seats with automatic three-point belts approved by UN Regulation No. 16 or a comparable standard.


Tested and Certified According to ECE R129				
Model No.	Stature	Orientation	Installation	Approval Type
WD034 RANGER 2	40-105cm	Rearward	ISOFIX +Top Tether +Harness	i-Size
	76-105cm	Forward		
	100-150cm	Forward	Vehicle 3 point belt+ ISOFIX	
			Vehicle 3 point belt	

*ECE = European Standard for Safety Equipment
The child safety seat has been designed, tested, and certified according to the requirements of the European Standard for Child Safety Equipment (ECE R129). The seal of approval "E" (in a circle) and the approval number are located on the approval label (sticker on the child safety seat).

This approval will be invalidated if any modifications are made to the child safety seat. Only the manufacturer is permitted to make modifications to the child safety seat.




- EN Scan for user manual
- DE Scan für Benutzerhandbuch
- FR Scannez pour le manuel d'utilisation
- IT Scansiona per il manuale utente
- ES Escanear para el manual del usuario
- JP Qrコードをスキャンして説明書を表示します
- AR يحاشرللإل ايلخلح لسم
- RU сканируйте для руководства пользователя
- NL
-
-
-

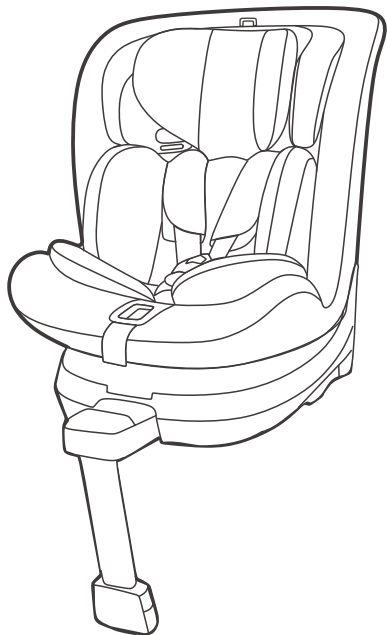

WD034
RANGER 2

USE IN THE VEHICLE



**Proper seating
positions for your child
car seat.**



If you need to install the seat in the front passenger seat, please ensure that the airbag is deactivated to avoid serious injury.





WARNING!





Never use this child restraint system in seating positions where an active airbag is installed.






Quick Installation Guide

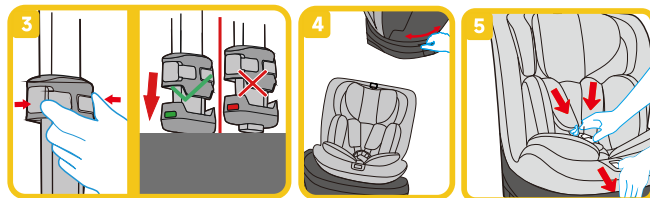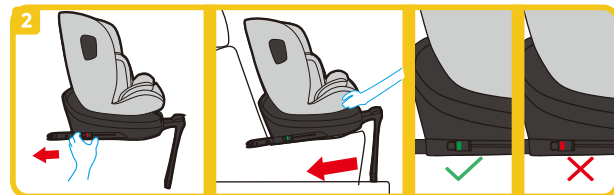



Quick Installation Guide

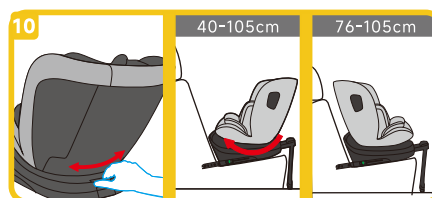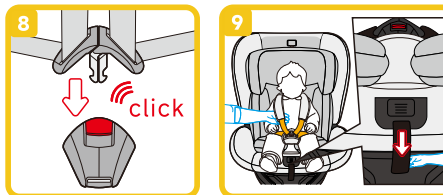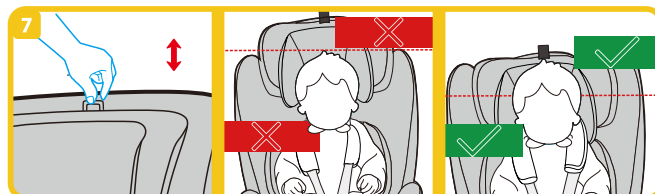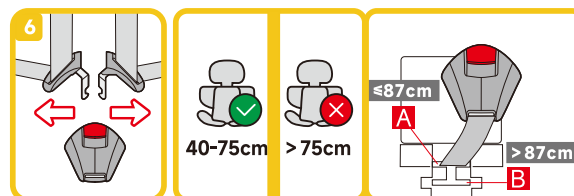

Quick Installation Guide

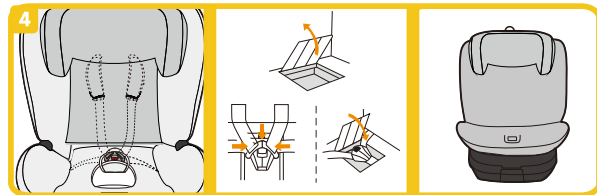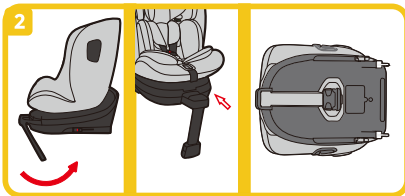

Quick Installation Guide

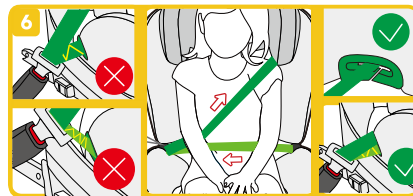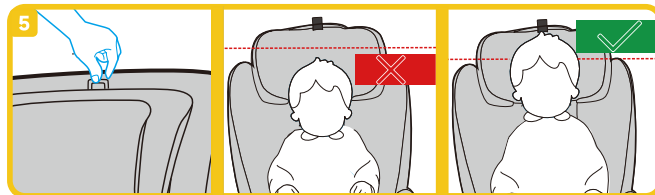

1.Warning..... 08

2.Product Description..... 09-10

3.Basic Information..... 11-12

4.Instruction for Stature 40cm+..... 13-16

5.Instruction for Stature 76-105cm..... 17-18

6.Instruction for Stature 100-125cm..... 19-22

7.Important Safety Precautions..... 23

8.Care and Cleaning..... 24


9.Warranty..... 25

10.Safety Checklist..... 26

**READ USER MANUAL PRIOR TO INSTALLING
AND USING THIS BABY CAR SEAT.
KEEP THIS MANUAL FOR FUTURE USE.**



1. The rigid items and plastic parts of the baby car seat should be located and installed so that they are not likely to become trapped by a movable seat or in the vehicle's door during everyday use.
2. Any straps securing the restraint to the vehicle should be tight. Straps or impact shields restraining the child should be adjusted to fit the child's body, and straps should not be twisted.
3. It is important to ensure that the lap straps are positioned lower than the baby's hips.
4. The baby car seat should be replaced if it has been subjected to violent stresses in an accident.
5. DO NOT leave your child unattended in the baby car seat.
6. Secure any luggage or other objects that could cause injuries in the event of a collision.
7. DO NOT use the car seat without the fabric cover.
8. DO NOT replace the cover of the baby car seat with anything other than the one recommended by the manufacturer, as the cover is an integral part of the restraint system's safety performance.
9. Refer to the vehicle manufacturer's handbook for the use of an "i-Size ECRS".

2. Product Description

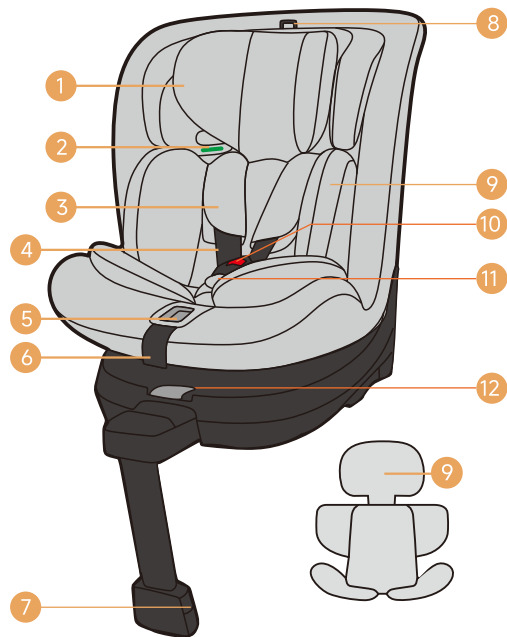


- 1. Headrest
- 2. Shoulder Belt Guide
- 3. Shoulder Pads
- 4. Shoulder Straps
- 5. Harness Release Button
- 6. Harness Adjustment Strap
- 7. Support Leg Indicator
- 8. Headrest Adjusting Lever
- 9. Newborn Insert
- 10. Buckle
- 11. Crotch Pad
- 12. Rotation Handle

2. Product Description

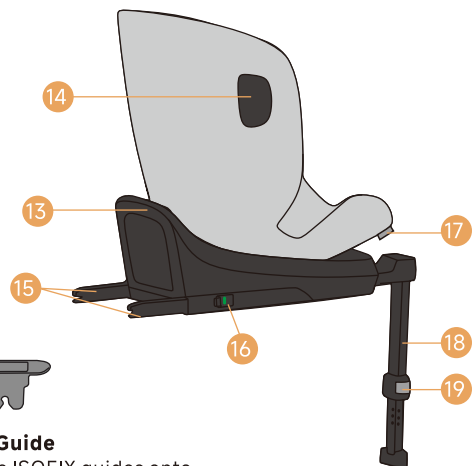


ISOFIX Guide
Insert the ISOFIX guides onto the car's anchors to attach the child seat securely.

- 13. Anti-Rebound Bar
- 14. Side Impact Protection
- 15. ISOFIX Connect Locking Arms
- 16. ISOFIX Release Button
- 17. Recline Angle Adjusting Handle
- 18. Support Leg
- 19. Support Leg Adjusting Button




3. Basic Information



Recline Position Adjustment

There are 5 recline positions for this product.
Pull the recline position adjustment handle(17),
and push or pull the seat to the desired position.



3. Basic Information

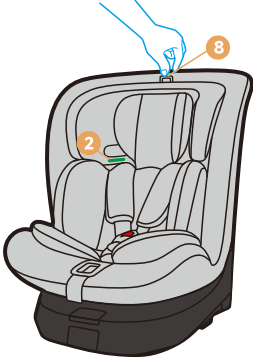

Headrest Height Adjustment

The adjustable headrest has 12 positions.
Adjust the headrest (8) to the most suitable
height by vertically pulling the headrest height
adjustment lever(2).




4. Instruction for Stature 40cm+

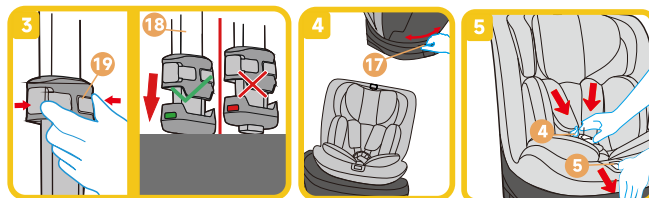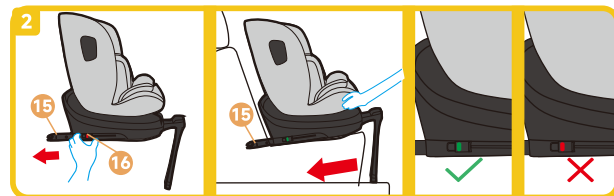

4. Instruction for Stature 40cm+

- 1 Remove the support leg **(18)** from the bottom of the seat. Rotate the support leg **(18)** outward, then pull the support leg **(18)** completely.
- 2 Press the ISOFIX release button **(16)** and slide the ISOFIX connect locking arms **(15)**. Ensures that there is a "click" sound and a green indication on the ISOFIX installation indicators.
- 3 Extend the support leg by pressing the support leg adjusting button **(19)** and pull out the support leg **(18)** until it rests firmly on the floor.
- 4 Adjust the seat direction by pulling the rotation handle **(12)** and setting the seat to the side-facing position for easier access when placing your child into the seat after installation.
- 5 Press the harness release button **(5)** and pull the shoulder straps **(4)** forward as far as possible to loosen them.





4. Instruction for Stature 40cm+

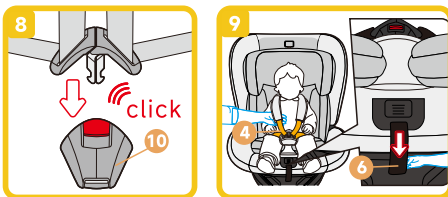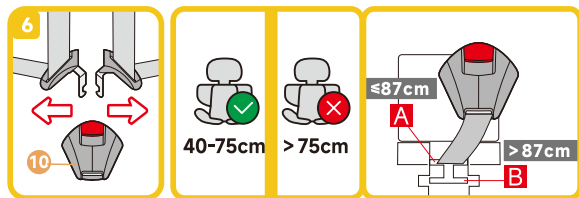

4. Instruction for Stature 40cm+

- 6** Open the buckle **(10)** by pressing the red button.
Place the buckle in slot A if your baby's height is ($<$) 87cm.
- 7** Pull the headrest adjusting lever **(8)** to adjust the headrest to the proper position ensures optimal protection for your child in the car seat. The headrest must be set so that the shoulder straps are at the same level as your child's shoulder or slightly above.
- 8** Guide the two buckle latches together and engage them before inserting them into the buckle **(10)**. Make sure you hear a "click" sound.
- 9** Put one hand in between the baby and the straps.
Pull the harness adjustment strap **(6)** until the space between the baby and the straps is about the thickness of your palm.
- 10** After completing the above step, pull the rotation handle **(12)** to turn the car seat to the rear-facing position.





5. Instruction for Stature 76-105cm

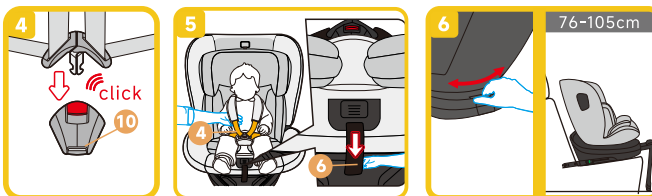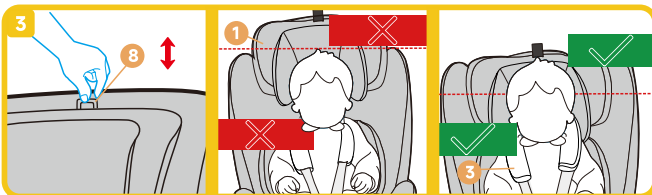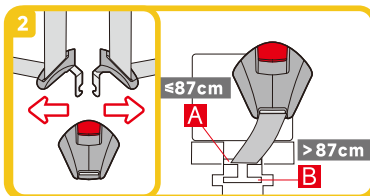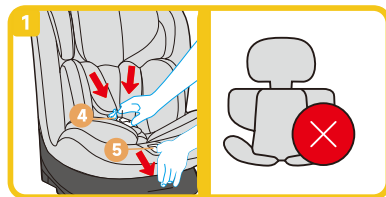

5. Instruction for Stature 76-105cm

- 1** Press the harness release button **(5)** and pull the shoulder straps **(4)** forward as far as possible to loosen them. Remove the newborn insert.
- 2** Open the buckle **(10)** by pressing the red button. Place the buckle in slot A if your baby's height is ($<$) 87cm
- 3** Pull the headrest adjusting lever **(8)** to adjust the headrest **(1)** to the proper position ensures optimal protection for your child in the car seat. The headrest must be set so that the should straps **(3)** are at the same level as your child's shoulder or slightly above.
- 4** Guide the two buckle **(10)** latches together and engage them before inserting them into the buckle. Make sure you hear a "click" sound.
- 5** Put one hand in between the baby and the straps. Pull the harness adjustment strap **(6)** until the space between the baby and the straps is about the thickness of your palm.
- 6** After completing the above steps, pull the rotation handle **(17)** to turn the car seat to the forward-facing position.


6. Instruction for Stature 100-125cm

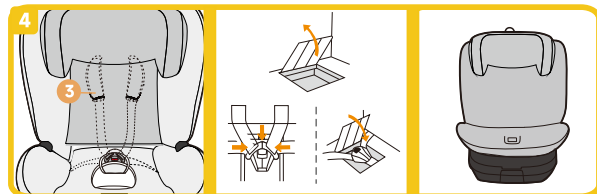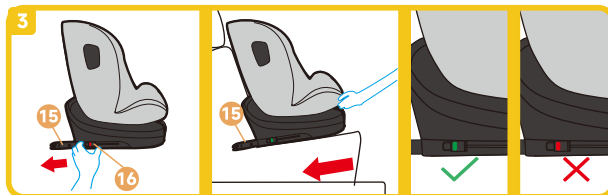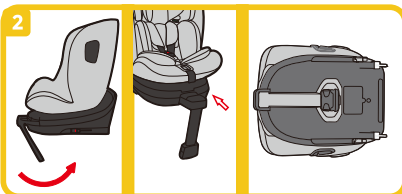

6. Instruction for Stature 100-125cm

- 1 Press the ISOFIX release button **(16)** to slide the ISOFIX connect locking arms **(15)** and detach the ISOFIX from the vehicle seat.
- 2 Retracting the support leg **(18)**, then rotate the support leg **(18)** backward to a 45° angle and push the support leg **(18)** inward until it is fully in place. Finally, tuck the support leg **(18)** into the slot at the bottom of the seat.
- 3 Press the ISOFIX release button **(16)** and slide the ISOFIX connect locking arms **(15)**. Ensures that there is a "click" sound and a green indication on the ISOFIX installation indicators.
- 4 Hide the shoulder pads **(3)** behind the headrest cover, open the buckle storage cover, properly assemble the buckle **(10)**, then put it into the buckle storage and finally close the cover. The buckle storage is located beneath the main fabric cover, which needs to be opened to access the buckle storage.

6. Instruction for Stature 100-125cm

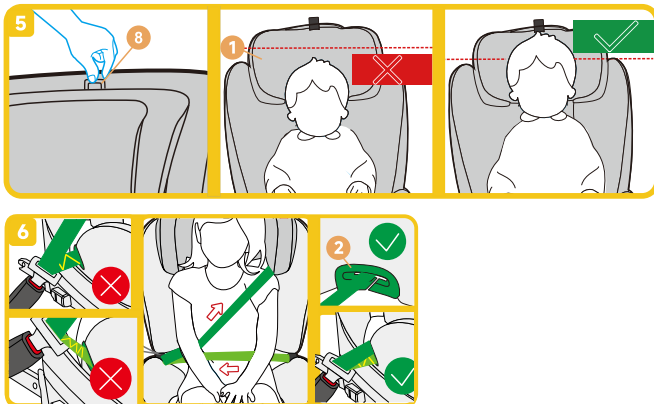

6. Instruction for Stature 100-125cm

- 5 Pull the headrest adjusting lever **(8)** to adjust the headrest **(1)** to the proper position to ensure optimal protection for your child in the car seat.
- 6 Thread the seat belt through the shoulder belt guide **(2)** and lap belt guide.
After ensuring the seat belt is correctly fastened on the baby car seat, lock the seat belt until you hear a "click."

CAUTION! Before every journey, ensure that the rotating part is fully engaged. Do not drive unless the seat is in a forward or rearward-facing position.

7. Important Safety Precautions



Never leave your child unattended in the child safety seat, especially when not in the vehicle.



**For the protection of all vehicle occupants
In the event of an emergency stop or accident,
unsecured persons or objects may cause injury to
other vehicle occupants.**

Always ensure the following:

The backrests of the vehicle seats are locked (e.g., the foldable rear seat bench latch is engaged).

- All heavy or sharp-edged objects in the vehicle (e.g., on the parcel shelf) are secured.
 - All passengers in the vehicle have their seat belts fastened.
- The child safety seat is always secured when in the vehicle, even if no child is being transported.

To Maintain Optimal Protection

- In the event of a collision at a speed exceeding 10 km/h, the child safety seat may incur damage that is not immediately visible.
- It is important to replace the child seat after such incidents to ensure continued safety. Proper disposal of the damaged seat is required.

8. Care and Cleaning

- Regularly inspect all components for any signs of damage. Verify the proper functioning of all mechanical parts regularly.
- To avoid damage or breakage, ensure the child seat does not become trapped in car doors, seat tracks, or other vehicle mechanisms.
- If the child seat sustains damage (e.g., from being dropped), it must be inspected by the manufacturer for safety assurance.

Care for Harness Buckle

- The functionality of the harness buckle is essential for your child's safety. Malfunctions are typically caused by the buildup of dirt and dust.

Notes for Cleaning the Car Seat

- To maintain the proper functionality of the car seat, please ensure that only original replacement seat covers are used. Replacement seat covers are essential for the correct performance of the car seat and are available from your retailer or authorized branches.



The child seat must not be used without the seat cover.

- The cover can be removed and washed with a mild detergent delicate cycle (30°C). Follow the instructions on the washing label of the cover. The cover's colors may fade if washed at temperatures higher than 30°C. Do not spin dry, and never use an electric dryer as the fabric may separate from the padding.
- Clean plastic parts with soapy water. Do not use harsh cleaning agents such as solvents.

CAUTION! Never remove the buckle tongues from the straps.

9. Warranty

We provide a 3-year warranty for this child car seat against manufacturing or material defects. The warranty period begins on the date of purchase. To validate the warranty, please keep the invoice and register your product on [jovikids.com](https://www.jovikids.com).

The Warranty Does Not Cover:

- Natural signs of wear and damage resulting from excessive stress.
- Damage resulting from inappropriate or improper use.
- Color fastness may diminish when exposed to UV radiation. However, all fabrics fade when exposed to UV radiation. This is not a material defect but a normal sign of wear that is not covered by the warranty.
- Buckle malfunction is often due to the accumulation of dirt and dust, which may prevent it from working properly. If this occurs, please check if you can clean it yourself without damaging the buckle. If cleaning does not resolve the issue, please contact after sales service.

For warranty claims, please contact your retailer directly. They will provide the necessary advice and support. When processing claims, product-specific depreciation rates will be applied. Please refer to our General Terms and Conditions, which are available from your retailer.

10. Safety Checklist

- ☒ Did you read and understand the vehicle owner's manual, this user's manual, and all labels found on this Child Restraint?
- ☒ Is the harness adjusted to the correct position according to the size of the baby?
- ☒ Is the child's height between 40-150cm?
- ☒ Is the buckle strap snug against the child but not under the child?
- ☒ Is the Child Restraint Rear-Facing in an approved vehicle seat location?
- ☒ Is the harness securely fastened without any slack?
- ☒ Is the seat angle adjusted correctly according to the child's age and size?
- ☒ Do you regularly check the installation and condition of the Child ?
- ☒ Restraint to ensure it remains in good working order?

If you answered YES to all these questions, you are good to go, and please DRIVE SAFELY!